Catalogue 9
























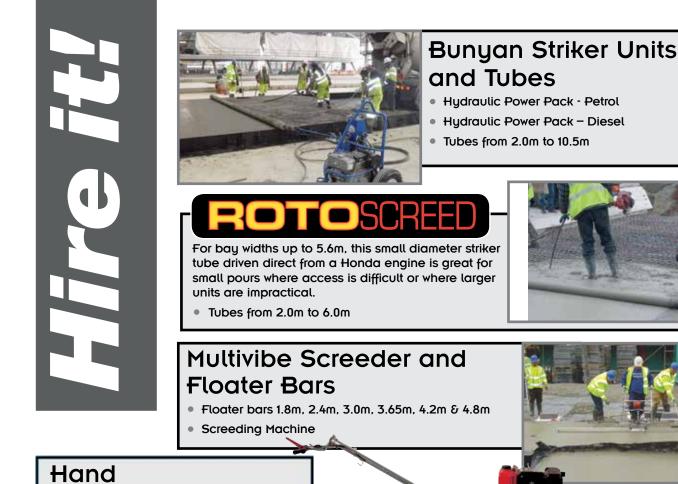

Hand Finishing Tools

- Big Blue (also known as 'easy floats' or 'flip-flop floats') for achieving a smooth finish to the concrete surface.
- Fresno Broom complete with medium head (other grades subject to availability) for achieving a brush textured finish.



Vibratory Pokers

- Lightweight Hummer c/w 1.2m shaft & a short 2" head
- Electric High Frequency

Pedestrian Powerfloats

- 36" Pedestrian c/w Blades and Pans
- 24" Pedestrian c/w Blades and Pans.
 Edging Float 'up close and personal'.

Ride-On Powerfloats

- 4 Blade twin 30" Rotor4 Blade twin 36" Rotor
- 5 Blade twin 46" Rotor

Incex



| Bunyan Striker Rollerscreed | 2 – 5 |
|--|--------|
| Pervious Concrete | 6 |
| Rotoscreed | 7 |
| Razorback Truss Screed | 8 |
| Allen Triple Roller / Access Solutions | 9 |
| Multivibe Vibratory Power Screeds | 10 –11 |
| Double Beam Screed | 11 |



| Barikell Pedestrian Power Trowels | 12 |
|--|--------|
| Power Trowel Consumables & Accessories | 13 |
| Barikell & Allen Ride-On Power Trowels | 14 –15 |
| MasterPac Power Trowels | 16 |



FLOATING EQUIPMENT

Spreaders & Sprayers

| Topping Spreaders & Site Tools | 17 |
|--------------------------------|----|
| Outpack Washout | 18 |
| Pumping Accessories | 18 |
| Hand & Power Sprayers | 19 |
| Mould Oil & Cleaning Chemicals | 20 |
| Curing Compounds & Retarders | 21 |
| Foaming Sprayers | 21 |

Vibratory Pokers VELACEV POKES

| Hummer – Lightweight Poker | 22 |
|---|----|
| Oztec Backpack | 22 |
| Classic Frame Poker | 22 |
| Pneumatic (Air) Pokers | 22 |
| Electric – Shaft Drive Pokers | 23 |
| Electric – Electronic High Frequency Pokers | 23 |

Cutting & Grinding FLOATING EQUIPMENT

| Husqvarna Hand Saws | 24 |
|---------------------------------------|--------|
| Husqvarna Floor, Road & Soff-Cut Saws | 25 |
| Grinders & Scarifiers | 26 –28 |
| Dust Collectors | 28 |

```
LIGHTINE TOWERS
```

Tower Lights

Lighting Towers

29

Roadforms & Covers COVERS/ROADFORM

| Steel Roadforms | 30 |
|-------------------------------------|----|
| Flexible Steel Roadforms | 30 |
| Road Pins | 30 |
| Pin/Stake Extractors | 30 |
| SpeedForm & K Form Plastic Formwork | 31 |
| Screedrail System & Support Chairs | 31 |
| SpeedTent – Concrete Covers | 32 |
| Standard Frost Blankets | 33 |
| Heated & Heavy Duty Frost Blankets | 33 |
| | |

-FINISHING TOOLS

Concrete **Finishing Tools**

| Big Blue Floats | 34 |
|-------------------------------------|---------|
| Magnesium Bull Floats | 35 |
| Wood & Plastic Bull Floats | 35 |
| Kraft Pack Bullfloat Kits | 35 |
| Channel Radius Floats | 36 |
| Bump Cutters | 37 |
| Fresno Brooms & Brush Finishing | 38 – 39 |
| Textured Bull Floats & Roller Tamps | 40 – 41 |
| Livestock & Imprint Rollers | 41 |
| Concrete Tamping & Levelling | 42 – 43 |
| Concrete Placers & Rakes | 44 – 45 |
| Rubber Squeegee | 45 |
| Floor/Form Scrapers | 45 |
| Hand Trowels | 46 – 48 |
| Edging Trowels | 49 |
| Knee Protection & Rub Bricks | 50 |
| Concrete Testing Equipment | 51 – 52 |
| | |



| Brick Trowels | 53 – 54 |
|-----------------------------|---------|
| Pointing Trowels & Jointers | 55 |
| Brick Tools Accessories | 56 – 57 |
| | |



The striker is a hydraulically driven steel tube pulled across the wet concrete at 230 r.p.m. The tube rotates in the opposite direction of travel creating a positive grasp of friction gathering up to 150mm of concrete build up, which tumbles ahead of the spinning tube.

What will it do?

- Helps to place the concrete As well as providing finished level
- Flatter Slabs

Less ripples, bumps and hollows than conventional screeders

- Matrix undamaged By leaving the major aggregates close to the surface, a more dense and durable slab results
- Pass and Re-pass Grade flaws easily recognised and eliminated with ability to re-pass over the strike area at will
- Variety of bay widths Tube lengths from 2.0m to 10.5m

Ronofite



- All units are hydraulically driven
- Top of the range for POWER & RELIABILITY
- May be sited 10-12m from the pour area and is connected with twin hydraulic hose to the control driver

Model Options

- Diesel Kubota OC95-E Power Unit
- Petrol Honda 4 stroke engine GX340





fficient sc
















Inclined Slope Work



and what is the alternative....?

... heavy, labour intensive and difficult to clean

- ... 'NO CONTEST'
- ... but if you want one, see page 8.





| Standard | Bare-end | |
|--------------|--------------|----------------|
| Tube Code | Tube Code | Tube length |
| Tub2.0 | Tub2.0BE | 2.0m |
| Tub2.5 | Tub2.5BE | 2.5m |
| Tub3.0 | Tub3.0BE | 3.0m |
| Tub3.5 | Tub3.5BE | 3.5m |
| Tub4.0 | Tub4.0BE | 4.0m |
| Tub4.5 | Tub4.5BE | 4.5m |
| Tub5.0 | Tub5.0BE | 5.0m |
| Tub5.5 | Tub5.5BE | 5.5m |
| Tub6.0 | Tub6.0BE | 6.0m |
| Tub6.5 | Tub6.5BE | 6.5m |
| Tub7.0 | Tub7.0BE | 7.0m |
| Tub7.5 | Tub7.5BE | 7.5m |
| Tub8.0 | Tub8.0BE | 8.0m |
| Tub8.5 | Tub8.5BE | 8.5m |
| Tub9.0 | Tub9.0BE | 9.0m |
| Tub9.5 | Tub9.5BE | 9.5m |
| Tub10.0 | Tub10.0BE | 10.0m |
| Tub10.5 | Tub10.5BE | 10.5m |
| | | |

Other specific lengths can be manufactured to order for purchase.

The Kerb Crawler

This device (named after a famous English actor) fits to the cold end of the striker tube and permits screeding right to the kerb face. They provide adjustment from a minimum concrete level of 50mm below kerb height to a maximum of 240mm.

| | | e | | |
|--------------------------|--|--------------|--|--|
| Hot-end BS45606 | Cold-end BS45607 | Fe | U | se our |
| 00000 | 5040007 | | | nehead' |
| | | | | ystem |
| | | 2 | | removable end |
| 6 | | | units allo | w our customers worn out tube and |
| | | T | to purch | ase straightened |
| | | | and easy to | ' tube only. Quick change they make |
| | | | our Bunyan | Striker system even re versatile. |
| | | 4 | | |
| A second second | | | | |
| | | and the seal | Contraction of the second | |
| | | | Antimutation (| E THE |
| the world efficient s | an | | diam. | |
| the world efficient s | l's most creed | the - | - | |
| system. | All and a second s | - | The state | |
| | | | 1 sure | |
| | | C PL | AR | Concerne and the |
| | | | 1 12 | Mana Chi |
| | | | | |
| | a 1 | | | all the for |
| | | | | - |
| | PAtt | | States | THE |
| ar 🖉 🔜 🖉 | | | | |
| us | | C. C. | - And a state of the state of t | hand the |
| d of eding | A DESCRIPTION OF | - | 7.44 | |
| de crete | Contraction of the second | | | |
| to a | | Part No. | Description | |
| and the second second | | Kerbcrawl | Standard height | 80mm – 140mm |
| | | Kerbcrawl(L) | Higher kerbs | 150mm – 240mm |
| | and south a | PAR RELITE | | |

The 'Tube Saver'

A new addition to our range of practical innovations. Use the 'tube saver' on the free-running 'cold end' of the Striker tube to stop the end being worn away when running on the cast edge of an existing concrete slab.







Bunyan Striker Accessories



Slope Kits

Manual system - includes double pulley blocks, shackles, securing stakes and rope gear.

Mechanical system - includes double drum winch and is hydraulically operated.

Suggested maximum length of tubes for slope work is 6.4m.





The Bunyan Striker can be used in the construction of in-situ concrete conical tanks. Special bracketing can be supplied to suit all designs of conical tanks, whereby the cold end of the Striker tube is supported from the centre fulcrum point of the sump well. This ensures tight tolerances and the correct radius grade.

Mini Roller Precast Kits

The rollerscreed system can be used in various formats within precast factories. We have many customers who use the traditional Bunyan striker for large wall and floor panels, but through our years of experience, we have also developed bespoke designs for numerous applications including tunnel segment manufacture.

Call us to discuss how we may be able to help your company!





Many projects demand new and innovative ways of laying and levelling concrete. Speedcrete have developed many different systems that have been used on projects in various countries. The picture shows a roller system complete with 'crown tubes' used on a high speed rail link. If you have a problem we may be able to help.

Pervious Concrete

Pervious concrete is the latest in green and sustainable construction methodology. Designed to allow water to soak through the concrete surface it helps prevent a host of problems including erosion, flash floods, water table depletion and pollution of rivers, lakes, and coastal waters as rainwater rushing across pavement surfaces picks up everything from oil and grease spills to deicing salts and chemical fertilizers.

We can offer all the tools and equipment that you will need to lay pervious concrete.







Can be decorative too!



ROTOSCREED

Roller Screeds

- Lightweight.
- More compact.
- New Hydraulic Drive System Honda 4 stroke engine.
- Cost effective and economical to buy and operate.
- Engine and gearbox mounted on the end of the tube.
- Ideal for small pours and metal decking.
- Easily connected and dismantled.
- As with all tubes easy to clean!
- Can be used with 6" or 4.5" Diameter Tubes.

RT6



RT10





| Part No. | Description |
|----------|----------------------------------|
| RT10 | Rotoscreed drive unit & T-bar |
| TP6 | 6" Tube Plug |

LEVELLING EQUIPMENT











- Lightweight.
- More compact.Easy to Transport
- RT6 Direct Drive System Honda 4 stroke engine.
- Custom Tube Profiles
 available



| Description |
|---|
| Rotoscreed drive unit GX35 and T-bar |
| 4.5" Tube Plug |
| Bare 4.5" Tube up to 6m (can be cut to size) |
| |



Power Screeds & Workbridges

255CD

Triple Roller Tube Pavers

Precision engineered tubes ensure the smoothest pavement possible. Powered by rugged Petrol or Diesel engines, with easy to operate control systems, the Triple Roller Tube Paver can strike off concrete fast. With our precision engineered and level-tested roller tubes, you can be assured of producing the flattest paving job possible. Three models available or customisable to your specifications.





Handrail systems available - please call to discuss

Access Solutions

Youngman Boards

Youngman Boards, also referred to as Light Weight Stagings (LWS), are designed, tested and approved to BS 2037 Class 1. A full range of aluminium frame stagings, providing a safe, uninterrupted working platform that will span up to 6.1m without intermediate support.

Lightweight construction Full handrail system available 450mm wide

| Order Code | Product Name | Max. Span |
|------------|-----------------|-----------|
| 330408 | LWS W/Deck 3.0m | 1.8m |
| 336408 | LWS W/Deck 3.6m | 2.4m |
| 342408 | LWS W/Deck 4.2m | 3.0m |
| 348408 | LWS W/Deck 4.8m | 3.6m |
| 354408 | LWS W/Deck 5.4m | 4.2m |
| 360408 | LWS W/Deck 6.0m | 4.8m |
| 373408 | LWS W/Deck 7.3m | 6.1m |

Powered & Non-powered Work Bridges







ALLER

LEVELLING EQUIPMENT

| MODEL WB12 | | |
|---|------------------|-------------------------------|
| Frame Dimensions (W x D) | | x 12" x 46cm) |
| Max. Length | 65' | (20m) |
| Available Sections | 7.5' 5' 2' | (2.28m) (1.52m) (0.61m) |
| Also WB18 (24" x 18") and WE available. Please ask for furthe | | |

Power Screeds

LEVELLING EOUIPMENT







Power Screeds

PR100D





| Part No. | Description |
|----------|--|
| PR100D | 'Drillscreed' with two handled screed assembly c/w Milwaukee M28 drill kit |
| D28 | Drill kit - includes drill, 2 lithium-ion batteries, mains charger in plastic carry-case |





When constructing wide bay slabs and mass pours use our Multivibe Powerscreeds. Spot level in the wet concrete with a laser level, rake & then use the powerscreed to level and vibrate the concrete.



Double Beam Screed

- Hard wearing durable power screeds.
- Available in extendable or fixed length units.
- Petrol or Electric power options.
- Steel Beams.

| Part No. | Description |
|----------|--|
| DBS-EXTH | Extendible screed with Honda engine (3.0m – 6.0m) |
| DBS-FXH | Honda power unit |
| DBS-FXE | Electric power unit |







BARIKEL

4-60

24 and 30 Inches

Machine diameter 600mm and 750mm with 4 Blades, for edge powerfloating, with stabiliser ring, pull start and folding handle.

| Cat. No. | Engine Mnfctr. | Power HP | Power | No. of Blades | Weight (kg) | Starter Type | |
|-------------|--|-------------|--------|------------------|-----------------------|-----------------|--|
| 3000 | Honda | 4 | Petrol | 4 | 48 | Manual | |
| 3005 | Honda | 5.5 | Petrol | 4 | 53 | Manual | |
| Add 'G' | Add 'G' to machine code for lifting hook | | | | | | |

Electric

24 and 36 Inches at 110V

Machine diameter 600mm and 900mm with 4 Blades. 240V also available to special order.

| Cat. No. | Engine Mnfctr. | Power HP | Power | No. of Blades | Weight (kg) | Guard Type | |
|-------------|-------------------|---------------|------------------|------------------|-----------------------|---------------|---|
| 3014 | Electric | 3 | 110v Single Phas | ie 4 | 53 | Edging | 1 |
| 3122 | Electric | 3.5 | 110v Single Phas | e 4 | 80 | Fixed | |
| Add 'G' t | to machine cod | e for lifting | hook | | | | |





36 Inches

Machine diameter 900mm with 4 blades and short handle. Can be supplied on request with long or folding handle, opening , protection ring and lifting hook.

| Cat. No. | Engine Mnfctr. | Power HP | Power | No. of Blades | Weight (kg) | Starter Type |
|--|-------------------|-------------|--------|------------------|-----------------------|-----------------|
| 3100 | Honda | 5.5 | Petrol | 4 | 75 | Manual |
| 3103 | Honda | 6.5 | Petrol | 4 | 76 | Manual |
| 3105 | Honda | 9 | Petrol | 4 | 86 | Manual |
| 3123 | Yanmar | 4.5 | Diesel | 4 | 85 | Manual |
| Add 'G' to machine code for lifting hook | | | | | | |





46 Inches

Machine diameter 1200mm with 4 blades and short handle. Can be supplied on request with long or folding handle, opening skirt for easy blade change, stabiliser and lifting

| Cat. No. | Engine Mnfctr. | Power HP | Power | No. of Blades | Weight (kg) | Starter Type | (|
|-------------|-------------------|-------------------|--------|------------------|-----------------------|-----------------|----|
| 3155 | Honda | 9 | Petrol | 4 | 89 | Manual | יך |
| 3187 | Yanmar | 7.5 | Diesel | 4 | 98 | Manual | |
| Add 'G' | to machine coo | le for lifting ho | ok | | | | |

Power Floats & Accessories



Moskito 24

Speedcrete Edger 24 Inches

Machine diameter 600mm with 4 Blades, for edge powerfloating, with stabiliser ring, pull start and folding, adjustable height

| | Engine Mnfctr. | | | No. of Blades | | |
|------|-------------------|-----|--------|------------------|----|--------|
| SC24 | Honda | 5.5 | Petrol | 4 | 48 | Manual |





Pans

| Part No. | Machine | Diameter | Blades | Brackets |
|-----------|-------------------------|-------------|----------|------------|
| B424 PAN | All 24" | 600mm/24" | 4-Blades | 4 Bracket |
| B430 PAN | Moskito 30" | 760mm/30" | 4-Blades | 8 Bracket |
| B436B | Barikell | 980mm/38.5" | 4-blades | 8 Bracket |
| B436 PAN | Bartell/Allen/Masterpac | 940mm/36" | 4-Blades | 8 Bracket |
| B446 PAN | Bartell/Allen | 1170mm/46" | 4-Blades | 8 Bracket |
| B446/5PAN | Barikell/Allen | 1170mm/46" | 5-Blades | 10 Bracket |
| B448 PAN | Masterpac | 1220mm/48" | 4-Blades | 8 Bracket |
| B448/5PAN | Masterpac | 1220mm/48" | 5-Blades | 10 Bracket |

Replacement blades



Finish Blades

| Part No. | Machine | Blades/Pack |
|----------|------------------|-------------|
| 20455 | 24" Moskito | 4 Blades |
| 20454 | 30" Moskito | 4 Blades |
| 4223 | MK8-75 Rider | 4 Blades |
| 20457 | 36" Finish Blade | 4 Blades |
| 20456/5 | 46" Finish Blade | 5 Blades |
| | | |



Wheel Sets

Move your riders nice & easy around the jobsite with manufacturer specific wheel sets. Available for all our ride on trowel model.

| Part No. | Туре | |
|----------|-----------|-----|
| AWS | Allen | |
| BWS | Barikell | |
| MWS | Masterpac | 10 |
| | | - 0 |

Finishing Shoes


Designed to prevent foot marks from heavy site boots to the finished surface, our finishing shoes come in two versions. Flat for concrete finishing & spiked for epoxy floors.

| Part No. | Туре |
|----------|--------------------------------|
| ESH0E-M | Spiked Epoxy Shoe Medium |
| ESH0E-L | Spiked Epoxy Shoe Large |
| ESH0E-XL | Spiked Epoxy Shoe Extra Large |
| FSH0E-M | Flat Concrete Shoe Medium |
| FSH0E-L | Flat Concrete Shoe Large |
| FSH0E-XL | Flat Concrete Shoe Extra Large |



Sizes: M - 81/2 + under L - 8-10 XL - 10-15

Combination Blades



Polypropylene Blades for coloured concrete

| Part No. | Machine | Blades/Pack |
|----------|--------------------|-------------|
| 20455 | 24" Edging Blades | 4 Blades |
| 20483P | 8"x14" Poly Blades | s 4 Blades |
| | | |
| | | |
| | | |
| | | |



S.R.L

MK8-75

MK8-90

Cat.

No.

3265

3269

30 Inches

36 Inches

Power

HP

27

25

Machine with 2 rotors diameter 750mm each and 8 separate blades. Working area 1540mm. Can fit 2 floating pan disks diameter 750mm.

| Cat. No. | Engine Mnfctr. | Power HP | Power | No. of Blades | Weight (kg) | Steering Type stick | |
|-------------|-------------------|-------------|--------|------------------|-----------------------|---|--|
| 3210 | B & S | 18hp | petrol | 8 | 195 | stick | |

Machine with 2 rotors diameter 900mm each and 8 separate blades. Working area 1940mm. Can fit 2 floating pan disks diameter 980mm.

No. of

Blades

8

8

Weight

(kg)

288

315

Weight

(kg)

398

Steering

Type

stick

stick

Steering

Туре

stick

Power

petrol

diesel

10:02

OF

:10







Engine

Mnfctr.

honda

kubota


36 Inches

48 Inch Overlapper

Power

petrol

Machine with 2 rotors diameter 900mm each and 8 separate blades. Working area 1940mm. Can fit 2 floating pan disks diameter 980mm.



Machine with 2 rotors diameter 1200mm each and 8 separate blades. Working area 2140mm.







OL-120

Engine

Mnfctr.

honda

Cat.

No.

3295

48 Inches

Power

HP

27

Machine with 2 rotors diameter 1200mm each and 10 separate blades. Working area 2540mm. Can fit 2 floating pan disks diameter 1200mm.

No. of

Blades

8

| | Engine Mnfctr. | | | No. of Blades | | |
|------|-------------------|----|--------|------------------|-----|-------|
| 3305 | kubota | 25 | diesel | 10 | 360 | stick |

<u>MK10-120HCS</u>

48 Inches

| Machine with 2 rotors diameter 1200mm each and 10 separate blades. Working area |
|---|
| 2540mm. Can fit 2 floating pan disks |

| | Engine Mnfctr. | | Power | No. of Blades | • | Steering Type |
|------|-------------------|----|--------|------------------|-----|------------------|
| 3346 | kubota | 25 | diesel | 8 | 400 | joystick |







FLOATING EQUIPMENT

130

MP215

26hp Honda GX690 air cooled petrol engine. Torque convertor clutch and standard duty (STD) gearboxes. 4 blade (90cm) rotors, 4 work-lights &power water spray system. 333kg



22hp Honda, Hydraulic steer control, torque converter clutch and super heavy duty (SHD) gearboxes. 4 blade (90cm) rotors, 4 work-lights and power water spray system. 376kg.

MSP445

40hp Kohler petrol, stick steer control, torque converter clutch and super heavy duty (SHD) gear-boxes. 5 blade (120cm) rotors, 6 work-lights and power water spray system. 477kg.

MSP455

40hp Kohler petrol, Hydraulic steer, torque converter clutch and super heavy duty (SHD) gear-boxes. 5 blade (120cm) rotors, 6 work-lights and power water spray system. 433kg.

HDX600

44hp Kubota turbo diesel, hydraulic joystick control and drive motors. 5 blade (120cm) rotors, 6 work-lights and power water spray system. 735kg.









MasterPac 36

36 Inches

Machine diameter 900mm with 4 Blades. Adjustable height handle.

| | Engine Mnfctr. | | | No. of Blades | | |
|-------|-------------------|-----|--------|------------------|----|--------|
| MP36T | Honda | 5.5 | Petrol | 4 | 53 | Manual |

MasterPac 48

Cat. Engin

48 Inches

| ne Power | Power | No. of | Weight | Size | |
|----------|-------|----------------------------|-----------------------|---------|--|
| Pac 48 | | diameter 12 Ides. Adjus | 200mm table height | handle. | |

TED

STERPA

| No. | Mnfctr. | HP | | Blades | (kg) | inches | cm |
|-------|---------|----|--------|--------|------|--------|-----|
| MP46T | Honda | 9 | Petrol | 4 | 107 | 48 | 120 |

PRT364

26hp Honda, Stick steer control. Advanced design features to assist with on site operation. All new super heavy duty (SHD) gearboxes. 4 blade (90cm) rotors, 4 LED work-lights and power water spray system. 320kg.

PRT465

35hp B&S, Stick steer control. Advanced design features to assist with on site operation. All new super heavy duty (SHD) gearboxes. 5 blade (120cm) rotors, 4 LED work-lights and power water spray system. 320kg.

HIRE OR BUY

www.speedcrete.co.uk

T.4

STERPAC

Site Equipment

TV830 Topping Spreader

The TV 830 is of robust design and can be handled by one operator. The 830mm screen roller carries the weight of the machine and presses the material on to the concrete surface.

Duo-Top Topping Spreader

Twin Balloon Wheeled spreading machine for toppings and colours.



VEV



Gorilla[™] Bucket &Tubs

Almost indestructable, these buckets

are fantastic for a multitude of site

SITE EQUIPMENT

Invertor Generator

Powerful 8KVA Pure-Sinewave Invertor generator. Dual Voltage 230/110V. Can run senistive electronics & runs Metal Halide lights 'flicker' free.

Bulldog Shovels

Heavy Duty - Site Tough Shovels will give years of prolonged use. Available in a variety of styles & sizes.


Measuring **Bucket**

Metric & imperial measures

| 1 | - | = |
|------|----|----|
| THU | NS | 2 |
| 1111 | 3 | AR |
| 111 | GA | 0 |

Gorilla[™] Shove

Lightweight composite shovel great for loading and manual tasks. Far easier to clean than steel versions



based activities

| Mart Conternation | A 44 1440 | | 2. |
|-------------------|---------------------|-----------------|--|
| Code | Size | Туре | |
| TC75Y | Xtra Large 75 Litre | Flexible Tub | and the second s |
| TC42Y | Large 42 Litre | Flexible Tub | 2. All States |
| TC26Y | Medium 26 Litre | Flexible Tub | |
| TC14Y | Small 14 Litre | Flexible Tub | |
| TT4 | Medium 20 Litre | Flexible Bucket | |
| SPB1/Y | Small 10 Litre | Rigid Bucket | |



Site Equipment

Jetwash

EVO-JWGK

Evolution Tools Mitsubishi Engine with Jetwash & Generator Attachment

EVO-JW Evolution Tools Mitsubishi Engine with Jetwash Attachment



One Mitsubishi engine unit powers a range of compatible attachments providing you with a flexible & versatile machine whilst saving you







money. It's unique quick release coupling allows easy output connectivity and removal - it takes seconds!

Extra Attachments are available to add on to create a versatile kit that can be used for multiple on site tasks.







Chemicals & Foaming Sprayers

Mould Oil

| Standard form-oil for use with road |
|-------------------------------------|
| forms and shuttering. |

New 'GREEN' option also available made from vegetable oil – ask for details (add 'G' to part no.).

| Part No. | Size |
|----------|-------------|
| M05 | 5 litres |
| M025 | 25 litres |
| M0205 | 205 litres |
| | M05 M025 |

Liquid Release

 Liquid release helps prevent adhesion or pickup of imprint rollers when applying a textured surface to slabs
 see pg 37

Part No.

LR



Speedyclean

Speedyshield

- Equipment, Form & Vehicle Coating
- Keeps your image and investment looking shiny and new.
- Easy to use and apply
- 100% biodegradable, non toxic, non flammable, non corrosive, low odour.
- Cuts labour time for cleaning trucks and equipment
- Reduces cleaning chemicals necessary

0000

 Code
 Volume

 LCLE818-32
 0.9 litres

 LCLE818-50
 5 litres

 LCLE818-02
 19 litres

 LCLE818-55
 200 litres

Sealers & Dustproofers

Market Leading Industrial Floor Sealer

- Sikafloor[®]-ProSeal Pro is a clear acrylic resin polymer solution.
- Sikafloor[®]-ProSeal W is a one part water dispersed acrylic emulsion.
- When using Proseal Pro, use Xylene Thinners to clean sprayers and equipment.

Sikafloor Proseal cures, seals and hardens concrete

| Name | Part No. | Size |
|-----------------|----------|-----------|
| ProSeal Pro | PR0/25 | 25 litres |
| ProSeal W | PR0/25W | 25 litres |
| Xylene Thinners | XYLOL | 5 litres |



Why you should use it!

- 100% Biodegradable kind to the environment
- Non Hazardous no special storage
- Will not damage tools or equipment
- Water Neutralised safe to flow down drains
- Easy to use
- Increases safety no chipping or using harmful chemicals
- Non Harmful won't harm paint, rubber, plastic, grass, or metal
- Low Odour





How Concrete Dissolver works

Concrete Dissolver contains active substances that break down the molecules that bind the cement together with sand and water.


Concrete Dissolver is mixed with water to the desired strength and applied as a foam to the item concerned, using for example, a handheld foamer. The foam should be left to act on the concrete for 20-45 minutes. Then clean off the item thoroughly with a high-pressure

| Code | Volume |
|------------|------------|
| LCLE808-05 | 0.6 litres |
| LCLE808-50 | 5 litres |
| LCLE808-02 | 19 litres |
| LCLE808-55 | 200 litres |

cleaner or with water and a stiff brush. In cases where there is heavy build-up, the treatment can be repeated.

Cleaning & Protection Solutions



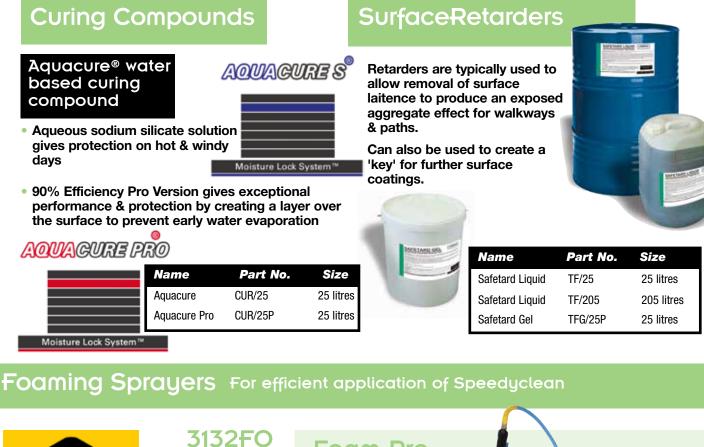



- Manual Compression Foamers that will work anywhere
- Ideal for application of cleaning chemicals on plant equipment to prevent run-off.
- Gives solid 'Snow Foam' that clings to surfaces to help chemicals work
- Available in two handy sizes

| Part No. | Size |
|----------|------------|
| 3132F0 | 1.5 litres |
| 3270F0 | 8 litres |

3270FO Foamer



Foamer



Foam Pro

Compressed Air Powered Foamers

Our Foam Pro series of compressed air powered foamers offer a convenient solution to the application of a variety of chemicals.

Many cleaning solutions are hard to apply in liquid form and need a method to bind to the surface to allow the solution to act. The Foam Pro offers two machines in one as it utilizes a two head system. One for spray application and one for foam application. This allows for the application of a great variety of chemicals.

The Foam Pro's are manufactured in Stainless Steel and feature a trolley solution for easy transportation around the work area. **FP25**

FP50



Backpack





| Code | Description |
|--------|--|
| BP50 | Backpack power unit |
| FS070Z | 2.1m Flexible Shaft |
| FS100Z | 3m Flexible Shaft |
| H2000Z | 50mm Poker Head |
| H2500Z | 60mm Poker Head |
| | exible Shafts and Poker ble to special order. |





CLASSIC Frame Vibrators

Equipped with 4-stroke Honda Petrol engine, or diesel option, operating at 3,200rpm, fitted with Dynapac type drive coupling. 5m shaft with 45mm or 60mm head.



AIR Vibrators

Internal pneumatic type maintenance free. Incorporates a one piece eccentric hardened case, guaranteeing long life.

| PNEUMATIC POKERS | | | | | | |
|-------------------------|--------|--------|--------|--------|--------|--|
| Model | VNF-25 | VNF-40 | VNF-50 | VNF-58 | VNF-80 | |
| Head Diameter (mm) | 25 | 40 | 50 | 58 | 80 | |
| Head length (mm) | 220 | 300 | 300 | 300 | 350 | |
| Frequency (vpm) | 14,000 | 13,000 | 12,500 | 12,000 | 9,500 | |
| Air Consumption (I/min) | 350 | 420 | 520 | 700 | 1,500 | |

P



Vibratory Pokers



RABBIT Vibrators

- Double insulated electric motor for best operator protection
- Light weight, great zone of action and vibration
- Long lasting flexible shaft
- Vibrating heads incorporating double bearings
- Quick disconnection for the changing of shafts and vibrating heads.

| Motor Type | Pov | ver | Voltage | Spee | d |
|--------------------|-----------|------------|-----------|-----------|-------|
| Single-Phase Elect | tric 2,30 | 0 W (3 hp) | 110v - 60 | Hz 16,000 |) rpm |
| FLEXIBLE SH | AFT | | | | |
| Length (m) | 2 | 4 | 5 | | |
| VIBRATING H | EADS | | | | |
| Diameter (mm) | 25 | 38 | 45 | 60 | |
| Length (mm) | 315 | 455 | 495 | 575 | |
| Action Zone (mm) | 20 | 70 | 90 | 110 | |
| Frequency (vpm) | 12,000 | 12,000 | 12,000 | 12,000 | |

High Frequency Electronic Vibrators

Our new range of electronic vibrators represents a significant technological advance over conventional high frequency

vibrators. The electronic

converter is integrated within the transmission, eliminating the need for stand alone converters, commonly used, thereby offering greater versatility for many applications.

The electronic components are well-protected against power surges and vibration, offering greater safety, reliability and handling.

LOW HARM High Frequency Electronic Vibrators

This new High Frequency Vibrator has been designed through input and suggestions of users themselves. Amazingly low HARM figures under 0.5 s/m2 A8 via isolation damper system allows long operator work times. Flex length can be customised.

Rubber Tip Models Available



| | GOLD | | | SI | .VA | |
|--------------------------------------|----------|-----------|-----------|-----------|--------|--------|
| Model | EDF-38LT | EDF-50 LT | EDF-60 LT | EDF-70 LT | MEF-38 | MEF-50 |
| Head Diameter (mm) | 38 | 50 | 60 | 70 | 38 | 50 |
| Head Length (mm) | 360 | 398 | 405 | 398 | 360 | 333 |
| Overall Weight (kg) | 20 | 21.5 | 23 | 24 | 12 | 13 |
| Frequency (vpm) | 13,500 | 12,000 | 12,000 | 12,000 | 13,500 | 12,000 |
| Length of protective rubber hose (m) | 7 | 7 | 7 | 7 | 4 | 4 |
| Length of power cable (m) | 15 | 15 | 15 | 15 | 5 | 5 |



Saws & Cutters

Husqvarna[®]



Saws & Cutters **Husqvarna** FLOATING EQUIPMENT FS400LV **Floor Saws FS413 Proven Trustworthv** 18/20" Petrol 14/18" Floor Saw Floor Saw **FS305** 450mm max. blade 500mm max. blade (162mm deep) (189mm deep) Foldable 14" Floor Saw 350mm max. blade (125mm deep) **FS410D FS524** 18/20" Diesel Floor Saw 18/20/24" Petrol 500mm max. blade Floor Saw (189mm deep) 600mm max. blade (241mm deep) Early Entry Saws **Road Saws** Soff-Cut **FS5000D** 150 Yanmar diesel 900mm max. blade (374mm deep) Soff-Cut 200E 0 FS7000D Deutz diesel 1000mm max. blade (411mm deep) Soff-Cut 4000 0 Saw Blades A complete range of Husqvarna saw blades for hand cut-off saws and floor & road saws are available.

And floor & road saws are available. Please contact us for full range and to discuss your requirements. Standard duty blades for concrete are:

S45 – 25.4mm bore for hard concrete for use with floor saws
S85 – 25.4mm bore for asphalt and green concrete for use with floor saws (up to approximately 7 days after pouring)
CM15 – 20.0mm bore for concrete for use with standard cut-off saws

CM15 – 20.0mm bore for concrete for use with standard cut-off saws *Please specify diameter.*

www.speedcrete.co.uk

Soff-Cut

4200

Grinders & Scarifiers

BG-250E

SURFACE PREPARATION

Electric single head grinder - 400v 3 phase with 250mm diameter grinding head.





BMP-265

Honda petrol engine or 400v 3 phase 'scarifier' for fast removal of hard concrete leaving a textured finish. 265mm cutting head.

BGP-250

Petrol engine single head grinder - Honda 10hp engine with 250mm diameter grinding head.



BMG-435WD

Electric or petrol triple headed grinder – 3 x 155mm diameter grinding discs.

ASTRAC

35WD

BMG-735PRO

machine - 3 x 240mm

diameter grinding discs).

Electric (400v 3 phase) triple headed grinding and polishing

BMP-335EHY

Electric floor planer (400v 3 phase) heavy duty and fast removal of concrete on large projects. 335mm cutting head.



Diesel floor planer heavy duty & fast! 335mm cutting head.

LPS55

Scabbler

Pole

Hand Scabblers

SC1 Single Head Scabbler



SH3 Triple Head Scabbler

www.speedcrete.co.uk

Z35PR0

Grinders & Scarifiers





Grinding & Dust Collectors





- Variable Speed for fine control during polishing applications
- Adjustable guard allows close edge work
- Easily installed and removed
- Powerful 1400W Motor





FLEX

BDC II

SE14

BLASTRAC BDC-1330LP

1330LP is deal for the BGP-250 & BG-250E floor grinders and the BMP-265 Scarifier. Longopac system helps prevent dust.

S26

Ideal Dust collector for PG 280 & PG450 Grinders, **Core Drills & Power** Cutters. 110V. Longopac system. 2.4KW. 47kgs

Husqvarna

T7500

3 Phase Dust Collector Designed for the Larger Grinders including PG530,PG680 & PG820 models. 5.5 KW. 206kgs



A1000/2000

HEPA Compliant filters designed for extraction of fine particulates. Use in conjunction with collector Single phase 110V. 20/38kgs





T10000

W.70P

Largest Dust Collector available for running multiple tools. Ideal for Larger Grinders including PG530,PG680 & PG820 models. 11KW. 336kgs



W70P

Wet 'n' Dry Dust collector

for Floor Saws, Core Drills

& Power Cutters. 110V.

1.2KW. 45kgs



• Small Portable & Effcient Lighting Towers

EMAN

- Available in Metal Halide for maximum light or LED models.
- Flicker Free Light from Pure Sine Wave Generators
- Easily to manoeuvre with integrated cart with Steering
- 360° Ballon light or Spot lamp version or interchangeable system







| Model | PB1200INT | PB1 300 | PB1200LED |
|-------------------|--------------------------------------|----------------|------------------------|
| | | | |
| Voltage (V) | 110 or 240 | 110 or 240 | 110 or 240 |
| Watt x no. | 1000 x 2 | 1000 x 3 | 400WLEDx 2 |
| Luminocity (Im) | 220,000 | 330,000 | 80,000 |
| No. of Tiers | 5 5 | | 4 |
| Mast height | 2.22 – 5.77m | 2.6 – 6.14m | 1.88 – 4.65m |
| Retracted (L/W/H) | etracted (L/W/H) 1.16 x 0.83 x 1.67m | | 1.16 x 0.83 x 1.67m |
| | X 1.0/III | x 1.8m | X 1.0/111 |
| Max. incline | <10° | <10° | <10° |
| Max. wind speed | <6 | <6 | <6 |
| Net weight (kg) | 200 | 223 | 142 |
| | | | |



Formwork & Accessories

Steel Roadforms

Square/Square & Broadbase Roadforms





- For deep slabs.
- For use on runways, taxiways ,etc.

• Square/Square Roadforms manufactured to order.

• Contact us with your requirements.

Square/Radius Edge Roadforms

3.0 metres long by 51mm wide.3 pins per length.

| Code | Depth. (mm) |
|---------------|-------------|
| R/FORM-100-SR | 100 |
| R/FORM-150-SR | 150 |
| R/FORM-200-SR | 200 |
| | |

Flexible Roadforms

Specially developed for radius work. 5 pins per length.

| Code | Depth. (mm) |
|---------------|-------------|
| R/FORM-100-FL | 100 |
| R/FORM-150-FL | 150 |
| R/FORM-200-FL | 200 |

Pin puller, Holder & Striker

Pick up the pin and hold it, whilst you drive it into the ground. The Pin puller helps you easily remove pins up to 20mm.



Roadform Stakes

Available for use with both square edge and flexible roadforms.

| Code | Length. |
|---------|------------|
| R22/600 | 22 x 600mm |
| R22/900 | 22 x 900mm |

CodeDescriptionP/P 3/4Pin Puller (small)P/P 7/8Pin Holder (large)P/HPin HolderR100Pin Striker

Code

BR/EXT

Stake Extractors

Description

'Big Ron's' Red

Road Pin Extractor





- Pulls stakes and pins straight up
- No bent or buried stakes
- Faster and easier stake pulling
- Heavy gauge steel and clear zinc plating
- Removes 16mm and 22mm round stakes
- Pulls stakes on curves and on soft ground

Code Description

| JJ0100 | 400mm (14") tall |
|--------|------------------|
| JJ0200 | 830mm (29") tall |



Formwork Systems






The Speedform system employs two types of form, one for straight work that has a metal core for rigidity and a flex form to create superb curves. In addition the roadpin can be placed at any point along the length of the form, with the steel pockets, that simply



Twist Pocket



twist and lock in long the form length. The slide pockets are typically employed at a join to 'reinforce' a connection. Stacking

DRM

Concrete Formwork Systems

pockets allow the formwork to be stacked on top of one another to increase the depth of the formwork.

Lightweight
 Versatile
 Re-useable



Stacking Pocket

5

K Form

K-Form is lightweight, durable and does not require removal after placement of concrete.

It is easily cut to length on site and has pre-drilled holes for placement of dowel bars in the vertical section.

Ideal for infills and linear drainage projects. Top strip can be removed and sealed or left in-situ.

Available in 3 sizes for slabs from 50mm to 225mm with optional 25mm top strip risers. 3mtr length.

| Code | Depth. (mm) |
|------------|-------------|
| KFORM35 | 50 |
| KFORM85 | 100 |
| KFORM135 | 150 |
| KFORMEXT25 | 25 [Riser] |



Screedrail System



Screedrail Support Chairs

| Code | Thread Adjustment | | Max. Slab Thickness |
|------------|---|-------|------------------------|
| SC1 | 30mm | 120mm | 150mm |
| SC2 | 50mm | 150mm | 200mm |
| SC3 | 100mm | 200mm | 300mm |
| SC4 | 80mm | 300mm | 380mm |
| SC5 | 80mm | 380mm | 460mm |
| Please sp | Please specify 'curved' or 'square' stirrup with code. | | |
| Various si | Various sizes of tube or box section available to suit your contract. | | |





Concrete Covers

Speedcrete are pleased to offer our unique 'Speedtent' which is available in a variety of sizes to suit most bay widths up to 8.0m.

The wedge shaped, 'low-slung' design assists in the tents ability to withstand winds of reasonable intensity.

Simplistic in concept the 'Speedtent' can be transported by small trucks.

A series of tents can be utilised to cover longer bays by using a combination of standard and over-lap units.

Manufactured to order. Leg height can be specified.

High Strength Durable PVC Covers





10 m 10 m











| Nominal Tent size: | | To cover Bay size (approx): | |
|-----------------------|--------|--------------------------------|--------|
| Width | Length | Width | Length |
| 4.5m | 6.0m | 3.5m | 5.0m |
| 5.5m | 7.0m | 4.5m | 6.0m |
| 6.0m | 4.5m | 5.0m | 3.5m |
| 7.0m | 5.5m | 6.0m | 4.5m |
| 9.0m | 7.0m | 8.0m | 6.0m |

Frost/Curing Blankets

pD



Basic Frost

Blankets

Closed cell

foam.

Code

FROST

FROST1

polyethylene

Description

8mm x 1.5m x 75m

10mm x 1.2m x 60m

Heated **Blankets**

Powerblanket® Concrete Curing Blankets provide a manageable way to cure concrete in the cold weather months.

Save time and money by protecting your business from the havoc of cold weather. Powerblanket[®] heated curing blankets come in various lengths and sizes. So whether your job is big or small, simple or complex; Powerblanket[®] has you covered.

- Cure concrete 2.8 times faster than conventional insulated blankets
- Increase early age strength development
- Maintain moisture throughout hydrating process
- Easily installed and removed
- Drum & IBC heaters also available



| Code | Size | Watts | Amps |
|--------------|-------------|-------|------|
| MD1020 | 3.0 x 6.0m | 2400 | 20* |
| MD1010 | 3.0 x 3.0m | 1440 | 12 |
| MD0520 | 1.5 x 6.0m | 1440 | 12 |
| MD0510 | 1.5 x 3.0m | 720 | 6 |
| MD0320 | 0.9 x 6.0m | 960 | 8 |
| MD0310 | 0.9 x 3.0m | 480 | 4 |
| MD0304 | 0.9 x 1.2m | 240 | 2 |
| * 32 amp plu | ıg required | | |

All New Heavy Duty Curing / Frost Blankets

Our new heavy duty frost blankets have been designed to overcome the issues of the cheaper Miothene blankets which have a tendancy to curl and lift.

> A reinforced PVC cover protects the insulated core providing a blanket that provides durability and one that stays flat ensuring the slab is properly protected.

> > The cover is dual sided to reflect heat during the summer and draw heat in the winter.

Featuring Brass eyelets at 1mtr intervals around it's border allows for securing the curing blankets during high winds.

CodeDescriptionFRPVC636m x 3m Thermal Blanket



SPEEDCHETE

Dual Use

Cure & Frost

Easy to store & Transport

Brass Eyelets

SPEEDCHETE

Big Blue

A blue carbon steel float to provide a super smooth finish.

When used in combination with the BUNYAN STRIKER TUBE, the requirement to powerfloat is often unnecessary eg house bases, sewerage treatment projects, etc.

Supplied with knucklehead gearbox for float pitch variation.

Other sizes available to order.

FINISHING TOOLS

Can be supplied with handles on each end for use in precast factories.



Complete with heavy duty knucklehead

| Part No. | Size | Weight |
|----------|----------------------------|---------|
| 704417 | 600mm x 300mm (2ft x 1ft) | 2.7kgs |
| 704418 | 900mm x 300mm (3ft x 1ft) | 5.0kgs |
| 704419 | 1200mm x 300mm (4ft x 1ft) | 5.9kgs |
| 704420 | 1500mm x 300mm (5ft x 1ft) | 7.8kgs |
| 704421 | 1800mm x 300mm (6ft x 1ft) | 9.5kgs |
| 704422 | 2400mm x 300mm (8ft x 1ft) | 11.4kgs |
| | | |


Blade only, also available

Float Adaptor Bracket

Edgers, Grooving tools etc.

The broom/float adaptor bar can be used with a combination of tools such as the Magnesium Bullfloats Big Blue Floats (see above) or Channel Radius Floats. Easily adjustable broom angle.

See Page 38/39 for Broomheads

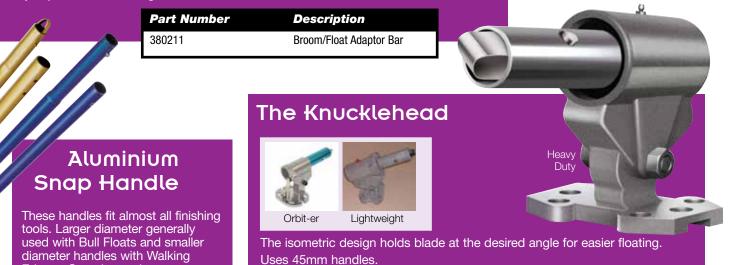

BIO O BLUE

| <u> </u> | | |
|----------|---|--|
| Part No. | Length | Diameter |
| CC336B | 1800mm (6ft) | 35mm (13/8") |
| CC289SG | 1800mm (6ft) | 45mm (1 ³ /4") |
| CC293SR | 2400mm (8ft) | 45mm (13/4") |
| CC291SR | 3000mm (10ft) | 45mm (13/4") |
| CC289-02 | Insert with Button Clip | 35/45mm |
| CC289-01 | Replacement Spring Button | |
| | CC336B CC289SG CC293SR CC291SR CC289-02 | CC336B 1800mm (6ft) CC289SG 1800mm (6ft) CC293SR 2400mm (8ft) CC291SR 3000mm (10ft) CC289-02 Insert with Button Clip |

| Part Number | Description |
|-------------|--|
| CC296 | Heavy duty Knucklehead cast aluminium |
| CC270 | Orbit-er Knucklehead |
| LWTKHEAD | Lightweight Knucklehead (composite) |

Bull Floats



These lightweight and long wearing magnesium floats are made from the finest extruded magnesium. Multi-ribbed top provides extra strength.

The blades are properly curved and balanced to prevent digging.

Blade only, also available

BUY A KIT AND SAUCE Add 'K' to Part Nato

Magnesium Bull Float with Knucklehead

Size

900mm x 200mm (3ft x 8")

1200mm x 200mm (4ft x 8")

1500mm x 200mm (5ft x 8")

Comes complete with heavy duty knucklehead gearbox.

FINISHING TOOLS

Make your Magnesium Bullfloat, Big Blue or Fresno easy to carry & transport with the neat Kraft Pack system.

| ĸ | |
|--------------|--|
| m & at | |

| Part No. | Description |
|----------|--|
| CC1011 | 48" (1.2m) Round end magnesium bullfloat kit incl. knucklehead, 4 no. snap handles & carry-case. |
| CC1001 | Carry Case only |

Add '-01' to part number for blade only. Add 'K' to part number for blade, Khead & 3 x 1800mm snap handles.

Part No.

CC736

CC803

CC804

Groover Bits for Bull Floats

By using our bronze groover bit 'dummy' joints can be formed whilst floating the surface.

Part No. **Bit Depth** CC940 19mm (3/4") **Plexiglas Bull Curved Fresno** CC941 25mm (1") Floats CC942 38mm (11/2") Trowel CC943 50mm (2") Used for floating concretes Used on shotcrete and skate parks.

Used for floating concretes that have high adhesive factor. (Nothing sticks to it like a Politician.) Ideal for the finishing of Air Entrained concrete and micro silica.

Description

900mm x 250mm c/w knucklehead

1200mm x 250mm c/w knucklehead

Part No.

790399

790400

Blade only also available.

Part No. Description

CC914 600mm Curved Fresno Blade only

Mahogany Wood Bull Float

This selected wood grain 200mm wide bull float is available in two sizes to suit knucklehead.

| Part No. | Description | |
|----------------------------|-----------------------------------|--|
| CC985 | 900mm wood float c/w knucklehead | |
| CC986 | 1200mm wood float c/w knucklehead | |
| Blade only also available. | | |



Magnesium Channel Floats

KRAFT TOOL CO.

Rounded

Front Edge

END VIEW

Squared 90°

Back Edge

The Bigger the Float the Flatter the Floor

This Channel Float combines strength and lightness, allowing you to float a larger area more economically than other floats. Great for use on high tolerance floors.

DUAL EDGE Magnesium Channel Radius Float with Knucklehead

Supplied with heavy duty knucklehead gearbox

- Round ends to reduce lapmarks
- Rounded front edge for floating
- Square 90° back edge for cutting

| Part No. | Length | Width |
|----------|---------------|------------|
| 700571 | 1200mm (4ft) | 150mm (6") |
| 700572 | 1500mm (5ft) | 150mm (6") |
| 700573 | 1800mm (6ft) | 150mm (6") |
| 700575 | 2400mm (8ft) | 150mm (6") |
| 700577 | 3000mm (10ft) | 150mm (6") |
| | | |

Outrigger Sets for Channel Radius Floats

Outriggers and Braces for Channel Floats

or Bump Cutters.

Part No.

| 790277 | Outriggers and Braces Recommended on Floats 2.4 metres and above |
|--------|---|
| 790279 | Clevis Pin and Yoke For attaching outriggers to float (2 required) |



The 'Double Boy'

This double channel float gives an even and consistent float surface. It features automatic adjustment of the float level no matter which way it is pulled.

Especially useful on P.Q. (pavement quality) work and low slump concrete.

Use on wide bays where access for traditional handles is limited.

| Part No. | Width | |
|----------|--------------|---------|
| 700600 | 1200mm (4ft) | and the |
| 700601 | 1800mm (6ft) | |
| 700602 | 2400mm (8ft) | |
| | | |

Hi-Tolerance Flooring Tools



Saw beams

Our saw-beam handles can be attached to either our magnesium tamp beam or aluminium screed beam (see Page 40) for increased surface flatness and tolerance. Used in conjunction with a 'bump cutter' it can produce super flat floor specifications.



Ergonomic handle design and slotted connection provides for wear adjustment and includes rubber grips.

| Part number | Description | 2 |
|-------------|---------------------|---|
| 700174 | Saw Beam Handle set | |



| Traditional Bump | Cutter |
|------------------|--------|
|------------------|--------|

A tool for smoothing and flattening the surface of plastic concrete. Typically used for attaining super flat and high tolerance floors as well as removing high spots from other concrete types including Pavement Quality.

| art No. | Description | Size |
|---------|---|--|
| 0150 | Complete unit including heavy-duty knucklehead and stainless steel outriggers & 3 snap handles. | 3000mm long – 125mm x 50mm (10' long – 5" x 2") |
| 0155 | Complete unit including heavy-duty knucklehead and stainless steel outriggers & 3 snap handles. | 3650mm long – 125mm x 50mm (12' long – 5" x 2") |



Replacement Parts

Brackets available separately.

| Part No. | Description | Size |
|----------|-------------------------------------|--|
| 400149 | Beam complete with brackets only | 3000mm long – 125mm x 50mm (10' long – 5" x 2") |
| 400154 | Beam complete with brackets only | 3650mm long – 125mm x 50mm (12' long – 5" x 2") |

Lightweight Bump Cutter

New style lightweight magnesium extrusion provides immense rigidity. May be used as a bump cutter or flat edge checking tool. Especially useful with Laserscreed machines.

| Part No. | Description | Size |
|----------|--|---|
| 400160 | Complete unit including knucklehead and outriggers & 3 snap handles. | 3000mm long – 118mm x 60 (10' long – 4 ⁵ /8" x 2¹/2") |
| 400165 | Complete unit including knucklehead and outriggers & 3 snap handles. | 3650mm long – 118mm x 60 (12' long - 45% " x 21/2") |



| | Part No. | Description | Size | |
|-------------|----------|--|--|---------|
| Replacement | 400159 | Lightweight beam, brackets and outriggers. | 3000mm long – 118mm x 60mm (10' long – 45/8" x 21/2") | Profile |
| Parts | 400164 | Lightweight beam, brackets and outriggers. | 3650mm long – 118mm x 60mm (12' long - 45% " x 21⁄2") | |



Fresno Brooms

Fresno Broom

A Zinc plated steel float incorporating float adaptor and a texturing broom. The brooms are manufactured in polybristle, available

in Hard, Medium or Soft textures. The brooms may also be supplied with a steel filament brush (to BS specifications) in widths of 900mm (3ft) and 1200mm (4ft) only. Floats have radius ends to prevent lap marks and come complete with a heavy duty KNUCKLEHEAD gearbox.

| Part Number | Length | Float Width | Broom Texture |
|-------------|--------------|----------------------------|---------------|
| 380100 | 900mm (3ft) | 125mm (4 ¹ /4") | Soft |
| 380101 | 900mm (3ft) | 125mm (41/4") | Medium |
| 380102 | 900mm (3ft) | 125mm (41/4") | Hard |
| 380103 | 900mm (3ft) | 125mm (41/4") | Wirebroom |
| 380104 | 1200mm (4ft) | 125mm (41/4") | Soft |
| 380105 | 1200mm (4ft) | 125mm (41/4") | Medium |
| 380106 | 1200mm (4ft) | 125mm (41/4") | Hard |
| 380107 | 1200mm (4ft) | 125mm (41/4") | Wirebroom |
| 380108 | 1500mm (5ft) | 125mm (41/4") | Soft |
| 380109 | 1500mm (5ft) | 125mm (41/4") | Medium |
| 380110 | 1500mm (5ft) | 125mm (41/4") | Hard |

| Part No, | Dimensions | Description |
|----------|--------------|--------------------------|
| 380300 | 900mm (3ft) | Blade only |
| 380304 | 1200mm (4ft) | Blade only |
| 380308 | 1500mm (5ft) | Blade only |
| 380211 | - | Float Adaptor |
| 380356 | - | 'T' Bracket (wire broom) |

Polybristle Finish Brooms

Standard Poly Broomhead. Use with an adjustable wood handle or snap adaptor. Removable brush strips provide a choice of brooming textures.

| Part No. | Broomhead Complete | Length |
|----------|-----------------------------|--------------|
| 380150 | Soft | 900mm (3ft) |
| 380151 | Med | 900mm (3ft) |
| 380152 | Hard | 900mm (3ft) |
| 380154 | Soft | 1200mm (4ft) |
| 380155 | Med | 1200mm (4ft) |
| 380156 | Hard | 1200mm (4ft) |
| 380158 | Soft | 1500mm (5ft) |
| 380159 | Med | 1500mm (5ft) |
| 380160 | Hard | 1500mm (5ft) |
| 701077 | Adjustable Wood Handle only | |
| CC284 | Snap Handle Adaptor 45mm | |



| - | |
|----|-------|
| ŀ | |
| 1 | |
| r. | No. 1 |
| | 2 Mar |
| | |
| | |

a1

| Part No. | Replacement Strip only | Length |
|----------|---------------------------|--------------|
| 380200 | Soft | 900mm (3ft) |
| 380201 | Med | 900mm (3ft) |
| 380202 | Hard | 900mm (3ft) |
| 380204 | Soft | 1200mm (4ft) |
| 380205 | Med | 1200mm (4ft) |
| 380206 | Hard | 1200mm (4ft) |
| 380208 | Soft | 1500mm (5ft) |
| 380209 | Med | 1500mm (5ft) |
| 380210 | Hard | 1500mm (5ft) |
| | | |

Polybristle Strip only



Brush Finishing



Steel Finishing Brooms

Primarily used for concrete texturing on motorways, airport aprons and taxiways.

Available with a 1500mm wooden handle with support brace.

Alternatively, they can be supplied with an adjustable wooden handle or snap handle adaptor (requires steel bracket).



Part No. Width Description 300mm (1ft) Fixed Wooden Handle 330001 600mm (2ft) **Fixed Wooden Handle** 330002 900mm (3ft) Fixed Wooden Handle 330003 1200mm (4ft) **Fixed Wooden Handle** 330008 900mm (3ft) Broomhead only 330009 1200mm (4ft) Broomhead only 330012 Steel Bracket c/w bolts only 701077 Adjustable Wood Handle only CC284 Snap Handle Adaptor 45mm

Snap Handle Adaptor Adjustable Wood Handle

The 'Chameleon' The concrete finishing rope brush

This handleless concrete finishing rope brush is the most versatile concrete finishing system on the market.

- Is EXCELLENT in CONFINED AREAS
- Is able to FINISH 50% to 75% FASTER
- Offers a UNIQUE ANGLE ADJUSTMENT

The CHAMELEON TRAC II patented handleless concrete finishing rope brush is a twin brush concrete finishing system that is pulled from side to side by ropes eliminating handles and width restrictions, which makes it excellent in confined areas where handles are awkward or on those wide pours where handles won't reach. It offers three textures with colorcoded brush refills and comes in 4', 6', and 8' widths to save you time and money.





...or with handles



The CHAMELEON TRAC II handleless concrete finishing rope brush easily converts into two individual concrete finishing brushes to be used with handles if required.



Concrete Texture

Serrated Bullfloat

This all cast float is available with a 9mm on centre groove spacing only.

Grooves 75mm long from leading edge of float, c/w heavy duty knucklehead.

Where a brush finish is not enough

| Part No. | Size | Description |
|---------------|--------------------------|--------------------|
| 390116 | 1050mm x 200mm | Serrated Bullfloat |
| Add "A" to pa | rt number for blade only | Ι. |

Cast Rumble Float

Designed to form harsh rumble 'wake-up' strips in paving or median strips. More often used on sea defence and slipways.

Radius wave design shown here has 110mm (4.5") with a 25mm (1") depth. These floats can be weighted.

Other sizes of wave design are available to order.

| Part No. | Size |
|----------|----------------|
| 390120 | 1200mm x 175mm |

Multi-Trac Texturing Float

Cuts perfect grooves every time. Produces a uniform sharp groove in various concrete applications where water drainage and traction are critical. Particularly useful in agricultural applications where a smooth crown is required.

Texturing Floats include heavy duty knucklehead.

| <u> </u> | ALL FLOATS | groove depth a - milled |
|----------|------------|----------------------------|
| | Part No | o. Size |
| 145 | CC787 | 4' x 8" (1200 |
| | CC788 | 3' x 8" (900m |

ALL FLOATS..... groove depth and width $\frac{1}{4}$ " x $\frac{1}{4}$ " (6mm x 6mm) - milled into the leading edge of blade.

| Part No. | Size | Spacing |
|----------------|----------------------------|-------------------------|
| CC787 | 4' x 8" (1200mm x 200mm) | ¹ /2" (12mm) |
| CC788 | 3' x 8" (900mm x 200mm) | 1/2" (12mm) |
| CC790 | 4' x 8" (1200mm x 200mm) | ³ /4" (19mm) |
| CC791 | 3' x 8" (900mm x 200mm) | ³ /4" (19mm) |
| CC796 | 4' x 8" (1200mm x 200mm) | 1" (25mm) |
| CC797 | 3' x 8" (900mm x 200mm) | 1" (25mm) |
| CC793 | 4' x 8" (1200mm x 200mm) | 21/4" (58mm) |
| CC794 | 3' x 8" (900mm x 200mm) | 21/4" (58mm) |
| Add '-01' to p | art number for blade only. | |

Agri-Groove

The Agri-Groove float was primarily designed for the use in dairy parlors & stalls.

It forms a deep 20mm groove that is designed to provide excellent grip for livestock and allow for a long floor life where mechanical cleaners & scrapers are utilized.

Available in 900mm (3') & 1200mm (4').

| Part No. | Blade Size | Groove Spacing | |
|--|------------|-----------------------|--|
| AG10-900 | 900mm | 10mm | |
| AG20-900 | 900mm | 20mm | |
| AG10-1200 | 1200mm | 10mm | |
| AG20-1200 | 1200mm | 20mm | |
| Add 'K' to Stock Code to include Knucklehead Gearbox | | | |

| 1 | 1 | Y | 1 | |
|-----|---|---|----|--|
| ing | | | | |
| oox | | | A. | |

Concrete Texture



Indent Roller

Width

30cm

slip surface.

Part No.

Indent

High quality brass roller for non-

Roller Tamp

A tool comprising single or twin mesh rollers which depress the major aggregate and bring fat to the surface. May be used for non-slip finish, leaving a diamond type pattern, e.g. car parks, cow yards, etc.

Supplied complete with 45mm snap handle adaptor.

| Size |
|--------------------------|
| 600mm Double roller tamp |
| 900mm Double roller tamp |
| 600mm Single roller tamp |
| 900mm Single roller tamp |
| |

Texture Rollers

Spread and screed the concrete as quickly as possible. Use a Multivibe screeder or a Roller striker to level the concrete. The use of a 'roller tamp' will help to work the fines to the surface and then use a magnesium bullfloat to work the 'fat' and smooth the surface ready to take the print. Apply liquid release to the surface of the concrete and the hexroller using our range of Mesto sprayers . Use the 'touch up' tool around the edges to make good where required.

Rock'n'Roller

The Rock n Roller system is a unique texture imprint system design for decorative imprinting.

Their are several styles and patterns available and matching border rollers for a perfect finish





Wide Diamond



Hex Roller

Slip resistant flooring for livestock areas.

Now you can apply slip resistant surfaces to any freshly poured concrete, quickly and easily.

The 'hexroller' imprints a deep pattern which allows for easy run-off of liquids and maximum grip in any direction.

| Part No. | Description |
|-----------|------------------------------|
| CYR/RA | Livestock Roller Starter Kit |
| LR | Liquid Release (20 litres) |
| HEXROLLER | Livestock Roller only |
| CC569 | 1/2" Wedge Touch-up Roller |





Tamping

Magnesium Tamp Beams

Lightweight with less 'sag' than traditional beams.

Rectangular Box Section

125mm x 50mm (5" x 2")

- 16' and above.

FINISHING TOOLS

100mm x 50mm (4" x 2") - 12' and below.

| Part No. | Length (m) | Length (feet) |
|----------|----------------------|-------------------------|
| CC410 | 3.0 | 10' |
| CC412 | 3.6 | 12' |
| CC419 | 5.0 | 16' 5" |
| CC420 | 6.0 | 19' 8" |
| CC424 | 7.3 | 24' |
| CC426 | 7.9 | 26' |
| | | |

Hi-tech Lightweight Magnesium Screed beam.

Unique extruded shape provides excellent strength and rigidity. Contoured shape facilitates hand screeding as it is easy to grip. Excellent where flatness tolerances are critical.

| 'Hour-glass' profile |
|----------------------|
| 115mm x 44mm |
| (4½" x 1¾") |
| (, |

| Part No. | Length (m) (nominal) | Length (feet) |
|----------|--------------------------------|---|
| HMS10 | 3.0 | 10' |
| HMS12 | 3.6 | 12' |
| HMS15 | 4.6 | 15' |
| | HMS10 HMS12 | (m) (nominal) HMS10 3.0 HMS12 3.6 |

Aluminium Tamp Beams

Rectangular Box Section

| 125mm x 50mm (5" x 2") - 16' and above. | Par | t No. | Length (m) | Length (feet) |
|--|------|-------|----------------------|-------------------------|
| 100mm x 50mm (4" x 2") - 12' and below. | CC41 | 0AL | 3.0 | 10' |
| | CC41 | 2AL | 3.6 | 12' |
| | CC41 | 9AL | 5.0 | 16' 5" |
| | CC42 | 20AL | 6.0 | 19' 8" |
| | CC42 | 4AL | 7.3 | 24 |

Easygrip Hand Screed

| Rectangular Box Section 90mm x 40mm (3.5" x 1.5") | | Part No. | Length (m) (nominal) |
|---|----------|---------------------------|--------------------------------|
| | | CC608AL | 2.4 - Aluminium |
| | | CC608 | 2.4 - Magnesium |
| | | _ | |
| Tamp Beam | Part No. | Handle ty | pe |
| Handles | 700174 | Saw Beam Ha | andles |
| Complete with | 700175 | Aluminium – | fixed height |
| rubber grips. | 700176 | Steel – adjustable height | |







Levelling

Concrete

Tamper -

'Jitterbug'

rubber grips on

handles.

CC889

DBSS – comprises

(900mm, 1500mm &

2500mm). All aluminium.

handle set and 3 bars

Part No.

Dapple Bar Kit

Self Levelling Kit

Mixing barrel (GG601)

Measuring jug (GG602) Oval mixer (DC717)

Spiked shoes (HC178)

Wood framed stainless

steel smoother (GG603) 1.5m (3 section)

Gauge rake

head (CC975-01)

GG600 - Complete kit with all the items required to mix

and install self levelling products. Includes:

Heavy steel bottom to

at all contact points,

prevent concrete splashing

on leas during use. Welded


Width

900mm (3ft)



Aussie Combo

This innovative new tool can be used as a float, screed, or checking tool when you want just the right finish. Base of tool comes with a round edge for floating and a square edge for cutting and filling. Lightweight magnesium handles adjust for comfort.



Buckaroo Straightedge

Straightedge for floating or striking off of concrete. Smooth tapered wooden handle includes top reading adjustable level vial for easy positioning. Base of tool has one round edge for floating and one square edge for cutting. Made from magnesium so very light.

| | Code | Size |
|---|--------|--------------------|
| | CC421L | 1.2m (35mm x 50mm) |
| | CC422L | 1.8m (35mm x 50mm) |
| | CC428L | 2.4m (35mm x 50mm) |
| | CC423L | 3.0m (35mm x 50mm) |
| and the second se | Y. | |
| D | 1. | Round Square |

Buckeye Straightedge

The Buckeye Straightedge hand screed is an innovative, one man, aluminium straightedge with a square profile for a multitude of tasks.

| Code | Size |
|-------|--------------------------|
| CC891 | 4' Buckeye Straightedge |
| CC893 | 6' Buckeye Straightedge |
| CC894 | 8' Buckeye Straightedge |
| CC895 | 10' Buckeye Straightedge |

End View of Screed

EZ Screed Tools

The new EZ Screed Tool used in an upright position is faster and more effective for concrete levelling (or sand), resulting in a more precise, professional finish. EZ Screed Tool is designed for

footpaths, driveways and slabs of various sizes.

Features:

- **Powder Coated Steel Handle**
- **Textured Grips**
- **Quality Aluminium bars**
- Kit comes with 0.9m,1.2m, 1.5m & 2.1m bars
- **Quick Disconnect**
- **Durable & Affordable**





Rakes & Placers

Lightweight Blue Texas Placer

All aluminium.

FINISHING TOOLS

Blue or Gold? Which do you prefer?

> **Part No.** CC964

Description

Lightweight 'right angle' placer



Lightweight Gold Texas Placer

All aluminium.

| Part No. | Description |
|----------|------------------------------|
| CC944 | Lightweight aluminium placer |

Aluminium Rake

These tools are lightweight and of rugged construction. This tool allows you to place the concrete where you want it.

You use the tooth side for raking - the smooth side for floating and screeding.

| Part No. | Description |
|----------|----------------|
| CC977 | Aluminium Rake |
| CC977-01 | Blade only |
| CC977-02 | Handle only |

Texas Placer

Contoured

Wooden Handle

1015

A heavy duty Grading Tool which will hold up under the toughest of jobs.

Blade is 500mm x 112mm cold rolled steel or aluminium.

| No. | Descri | ptio |
|-----|--------|------|
| | | |

Part

CC978Steel PlacerCC979Aluminium PlacerCC978-01Steel Blade onlyCC979-01Aluminium Blade onlyCC977-02Handle only

Dual Faced Magnesium Rake

Magnesium head, straight broom handle.

Part No. CC113 Description Magnesium 50cm x 10cm

Dual Faced Steel Rake

Steel head. Straight broom handle.

Part No.DescriptionCC010Steel 57cm x 13cm

Rakes & Placers



Magnesium Tri-level Placer

This tool is versatile and lightweight and is designed to ease the screeding process and to reduce labour costs. Durably constructed of magnesium in an extruded, triangular shape, this tool doubles as a bull float and is the only tool needed on small slabs prior to final finish.

| Part No. | Width | |
|----------|--------------|--|
| CC934 | 900mm (3ft) | |

Rubber Squeegee

For removal of surface water/bleed water. Supplied with 45mm Snap adaptor or wood handle.

 Part No.
 Width

 GG236C
 900mm (3ft) (curved)

 370250
 900mm (3ft)

 370251
 1200mm (4ft)

 370256
 1800mm (6ft)

 370258
 2400mm (8ft)

Magnesium Asphalt Rake

Lightweight magnesium head, Standard teeth on one side and smooth edge on the other. 2.1m aluminium anodised handle with support braces.

| Part No | o. Width | | |
|---------|-------------|---------------------------|---|
| GG626 | 900mm | X | |
| GG627 | 1070mm | | |
| | | ****** | ***** |
| | Floor/For | M Part No. | Width/ Description |
| | Scrapers | CC214 | 350mm (14") |
| | Contoured | CC218 | 450mm (18") |
| | oden Handle | CC222 | 560mm (22") |
| | | GG023 | 900mm (36") |
| | | GG024 | 1200mm (48") |
| | Dete | | nent blades available |
| | Raa | ius Bend Code CC980 | Description |
| | Quick- | Change | Convertor |
| | | | any hand tool – into Iking tool in second |
| | | | hold bracket secure e. It fits all bronze ar |

Snap Adaptor

Snap Adaptors with clevis end or threaded end (35mm or 45mm).



Part No. Description

CC33235mm Snap adaptorCC28445mm Snap adaptorCC495Quick-change converterCC657Single action bracketCC658Swivel action bracket

Trowel Bracket

Turns a normal concrete steel finishing trowel into a small Fresno. Just remove the handle and slide on the bracket.



Hand Trowels & Groovers

Trowels

Blue Steel Trowels

Fine quality blue steel blade. Blue steel offers a little more flexibility which some finishers prefer.

| 111 | |
|--------|---|
| | S |
| | 5 |
| | 4 |
| | 4 |
| | 4 |
| to bin | 3 |
| | 3 |
| | 3 |
| | 1 |





This trowel is for the professional and made from Blue Steel. Pool trowels are fully rounded, and flexible to allow contour finishing.

Cement Trowel

Manufactured in Blue Steel, with a choice of trowel shape. These trowels are 'brokenin' by factory skimming of the underside of the blade.

| Size | Square/ Round Front | Square/ Square | Round/ Round |
|---------------|------------------------|-------------------|-----------------|
| 500mm x 125mm | 370611 | CF734BPF | CF740BPF |
| 450mm x 125mm | CF343BPF | CF733BPF | 370681 |
| 400mm x 125mm | CF230BPF | CF535BPF | CF742BPF |
| 400mm x 100mm | CF285BPF | CF732BPF | CF737BPF |
| 350mm x 125mm | | | 370685 |
| 350mm x 100mm | CF284BPF | CF731BPF | CF736BPF |
| 300mm x 100mm | CF214BPF | CF730BPF | CF721BPF |
| 250mm x 100mm | CF213BPF | CF725BPF | 370686 |

Cement Finishing Trowel with ProForm[®] Handle • **Precision balanced!**

• Broken-in and ready to use!

Each blade is cross-ground, with high strength aluminium mounting. ProForm® handle is specially textured for that 'Great Grip'. Carbon Steel Trowel.

| Size | Square/Round Front | Square/ Square | Round/ Round |
|-------------------------|-----------------------|-------------------|-----------------|
| 500mm x 125mm (20" x 5" |) CF288PF | CF232PF | CF205PF |
| 500mm x 100mm (20" x 4" |) CF287PF | CF231PF | - |
| 450mm x 125mm (18" x 5" |) CF185PF | CF546PF | - |
| 450mm x 100mm (18" x 4" |) CF286PF | CF227PF | - |
| 400mm x 125mm (16" x 5" |) CF285APF | CF535PF | - |
| 400mm x 100mm (16" x 4" |) CF285PF | CF222PF | - |
| 350mm x 125mm (14" x 5" |) - | CF534PF | - |
| 350mm x 100mm (14" x 4" |) CF284PF | CF217PF | - |
| 300mm x 100mm (12" x 4" |) CF124PF | CF212PF | - |
| 250mm x 100mm (10" x 4" |) CF104PF | CF202PF | - |

1111

Size

500mm x 125mm (20" x 5")

450mm x 125mm (18" x 5")

400mm x 125mm (16" x 5")

400mm x 100mm (16" x 4")

350mm x 100mm (14" x 4")

350mm x 75mm (14" x 3")

300mm x 100mm (12" x 4")

250mm x 100mm (10" x 4")

Float Hook

> Code CF011

Part No.

CF295BPF

CF292BPF

CF280BPF

CF279BPF

CF277BPF

CF272BPF

CF275BPF

CF274BPF

Trowel

Code CF200

Sharpener

Cali Mahogany Wood Float

| Part No. | Description | Size | |
|----------|-------------|-------------------------|------------|
| HC160 | Mahogany | 12" x 3" (300mm x 75mm) | 12mm thick |
| HC161 | Mahogany | 14" x 3" (350mm x 75mm) | 12mm thick |
| HC162 | Mahogany | 16" x 3" (400mm x 75mm) | 12mm thick |
| HC164 | Mahogany | 18" x 3" (450mm x 75mm) | 12mm thick |
| | | | |

Redwood Float

| Part No. | Description | Size |
|----------|---------------|--------------------------|
| CF251 | Redwood float | 12" x 4" (300mm x 100mm) |
| CF252 | Redwood float | 15" x 4" (380mm x 100mm) |

Hand Trowels & Groovers



Magnesium Hand Trowel

with ProForm® Handle

Part No. Size CF020PF 500mm x 75mm (20" x 31/2") CF018PF CF016PF

Add "R"

| F | 450mm x 75mm (18" x 31/2") |
|---------|--|
| F | 400mm x 75mm (16" x 3 ¹ / ₂ ") |
| to part | number for round ends |



Pipe Trowel

Trowel to facilitate finishing around up-stands etc. Manufactured in

Carbon Steel.

Part No. Size PL501PF 300mm (12")

Extra Duty Resin Float

CC314SR

1111



Part No. Size

U72 350mm x 150mm

Groovers

Bronze Hand Groover

| Part No. | Length | Width | Bit Depth | |
|----------|------------|----------------------------|--------------|---|
| CF314PF | 200mm (8") | 100mm (41/2") | 25mm (1") | 1 |
| CF317PF | 200mm (8") | 100mm (4 ¹ /2") | 37mm (11/2") | |

& Walking Groovers

Hand

Tools manufactured in Bronze.

Walking tools require 1500mm wooden handle. Order separately - wood handle 701077 or snap adaptor -704453 (see page 41).



Bronze Walking Groover

| 1 | | | | |
|---|----------|------------|---------------|--------------|
| | Part No. | Length | Width | Bit Depth |
| | CC314 | 200mm (8") | 112mm (41/2") | 25mm (1") |
| | CC317 | 200mm (8") | 112mm (41/2") | 37mm (11/2") |
| | CC314SR | 150mm (6") | 112mm (41/2") | 25mm (1") |
| 1 | CC278 | 200mm (8") | 200mm (8") | 25mm (1") |
| | CC279 | 200mm (8") | 200mm (8") | 37mm (11/2") |
| | | | | |



Kraft Elite Trowels

Elite Series™ ★★★★ Five Star Trowels

If you require a little more from your trowel than the average finisher look no further than the Elite Series[™] Plaster Finishing Trowels from Kraft. Put simply these are Marshalltown Killers. Expertly crafted from the finest steel and available in both Carbon & Golden Stainless Steel options the trowels come complete with a trowel protector and a choice of multi coloured wood, leather or cork handles. In addition the all new Xtreme Flex[™] range offers the plasterer more flexibility for the ultimate finish.

Carbon Steel

| T. C. Str. Tr. Law T | | |
|----------------------|--------|---------------------------------|
| Size | | Leather Handle Square/Square |
| 500x125mm (20" x 5") | CFE232 | CFE232L |
| 450x125mm (18" x 5") | CFE546 | CFE546L |
| 400x125mm (16" x 5") | CFE535 | CFE535L |
| 350x125mm (14" x 5") | CFE534 | CFE534L |
| 350x100mm (14" x 4") | CFE217 | CFE217L |
| 300x100mm (12" x 4") | CFE212 | CFE212L |
| | | |

Xtreme FLEX™

All new Xtreme FLEXTM trowel caters for the professional plaster. Highly flexible blade reduces arm & wrist stress. Rivetless stainless steel blade features a machined edge for superior finishing.

Golden Stainless Steel

| Wood Handle Size | Leather Handle Square/Square | Square/Square |
|---------------------|---------------------------------|---------------|
| 500x125mm (20" x 5" |) CFE549 | |
| 450x125mm (18" x 5" |) CFE548 | |
| 350x100mm (14" x 4" |) CFE541 | CFE541L |
| 280x114mm (11" X 4. | 5") PLE454 | PLE454L |

| - | | 201212 |
|---|----------------------|-----------------------|
| | Xtreme Flex™ Size | Cork Square/Square |
| | 350x100mm (14" x 4") | PLE464K |

Stainless Steel Edgers

Flite



Elite SeriesTM Five Star Edgers $\star \star \star \star \star$

Experiance the highest quality edgers & groovers available for the professional tradesman. Each Elite Series[™] Stainless Steel Hand Edger is made to meticulous standards to create a long lasting quality tool.

Els net

Each radius is formed to exacting specifications for a smooth, professional finish on every job. The unique cork handle is secured to each tool to provide the utmost comfort for the user.

Flat



| Curved | | | |
|----------|------------|------------|-------------|
| Part No. | Length | Width | Radius |
| CFE168KC | 200mm (8") | 100mm (4") | 6mm (1/4") |
| CFE166KC | 200mm (8") | 100mm (4") | 12mm (1/2") |

Hand Edgers



Hand & Walking Edgers (Arris Trowels)

Used to create a smooth, neat border around textured slabs. Looks great with brushed finish.



| Blue | Steel | Hand | Edg | ers |
|------|-------|------|-----|-----|
|------|-------|------|-----|-----|

| Part No. | Length | Width | Radius |
|----------|------------|------------|-------------|
| 704565 | 150mm (6") | 25mm (1") | 6mm (1/4") |
| 704565A | 150mm (6") | 25mm (1") | 12mm (1/2") |
| 704567 | 150mm (6") | 50mm (2") | 6mm (1/4") |
| 704567A | 150mm (6") | 50mm (2") | 12mm (1/2") |
| CF568PF | 150mm (6") | 75mm (3") | 6mm (1/4") |
| CF572PF | 150mm (6") | 100mm (4") | 6mm (1/4") |
| CF574PF | 150mm (6") | 100mm (4") | 12mm (1/2") |
| CF677PF | 225mm (9") | 100mm (4") | 6mm (1/4") |
| 704580 | 225mm (9") | 100mm (4") | 12mm (1/2") |
| CF575PF | 225mm (9") | 150mm (6") | 6mm (1/4") |
| CF597PF | 225mm (9") | 150mm (6") | 12mm (1/4") |
| | | | |





FINISHING TOOLS

| Part No. | Length | Width | Radius |
|----------|--------------|------------|------------|
| CC302 | 225mm (9") | 100mm (4") | 6mm (1/4") |
| 701077 | 1500mm wood | en handle | |
| CC284 | 45mm snap ad | aptor | |

Blue Steel Walking Edger

| Part No. | Length | Width | Radius |
|----------|--------------------------|--|---|
| CC390 | 225mm (9") | 100mm (4") | 6mm (1/4") |
| CC392 | 225mm (9") | 100mm (4") | 12mm (1/2") |
| 701077 | 1500mm wood | en handle | |
| CC284 | 45mm snap ad | aptor 🔊 | |
| | CC390 CC392 701077 | CC390 225mm (9") CC392 225mm (9") 701077 1500mm wood | CC390 225mm (9") 100mm (4") CC392 225mm (9") 100mm (4") 701077 1500mm wooden handle |

| | rloy Han | | ATTOR | Part No. | Length | Width | Radius |
|------------------------------------|--|---|---------------|----------|--------------------------|-------------------|------------------------------|
| dge | r | | - THE DEFENSE | CC390 | 225mm (9") | 100mm (4") | 6mm (1/4" |
| | | | | CC392 | 225mm (9") | 100mm (4") | 12mm (1/2" |
| | | | | 701077 | 1500mm wood | en handle | |
| | | | | CC284 | 45mm snap ad | aptor 🔊 | |
| rt No. 0833 0835 | oL co. Length 200mm (8") 200mm (8") | Width 100mm (4") 100mm (4") | | | | ୫ M | uging largin |
| Edge | -Saver ers o-Saver) | aka | | | | | OWELS Blade size |
| · · | tical edgers will m | | | | Mo | who have all a | |
| • nese ver nishing s | tical edgers will ma step and form corn | iers a | | | Ind | rgin trowels | |
| se ver shing s eze. Ji | step and form corn ust insert this tool b | iers a between forms | | | GG4 | - | 125mm x 40mr |
| e ver ning s ze. Ji e cor | step and form corn | ers a between forms ms are stripped | | | | 131 | 125mm x 40mr 125mm x 50mr |
| ver ng s e. Ji cor hav | step and form corn ust insert this tool to ners When the forr e a perfect rounded | lers a between forms ms are stripped d corner. | | | GG4 | 131 132 | |
| vei ig s . Ji cor | etep and form corn ust insert this tool to ners When the forr e a perfect rounded Description | ers a between forms ms are stripped d corner. Size x F | Radius | | GG4 GG4 | 131 132 134 | 125mm x 50mr |
| yer g s Ji cor av | step and form corn ust insert this tool to ners When the forr e a perfect rounded | lers a between forms ms are stripped d corner. | | | GG4 GG4 GG4 GG4 | 131 132 134 | 125mm x 50mr 150mm x 50mr |



Knee Protection

Professional, all leather

- Top grain, natural russet leather.
- Comfortable thick felt lining.
- Wide 25mm leather strap.
- Rivet reinforced.



Plastic Cup

Made of cordura nylon with plastic knee cup. Very comfortable Strong and light.

A range of knee pads to suit both the cement finisher and plasterer.

May be used after work by the skateboarder.



E-Z Kneeler

Provides the knees comfortable support and protection.

Keep them safe or they might go missing!

| Part No | Size | Width |
|---------|---------------------------|-----------|
| WL069 | 14" x 24" (250mm x 600mm) | 2" (50mm) |

Knee Boards

Lightweight, tough heavy duty polystyrene plastic or Deluxe 16 gauge stainless steel. Knee pads are replaceable.

STORES OF

| Code | Description |
|-------|-------------------------------|
| CC162 | Stainless steel 750mm x 200mm |
| CC153 | Plastic 750mm x 250mm |
| WL080 | Replacement knee pads |



The perfect way to mark concrete for permanent identification. Made from high grade bronze. Stamp is 125mm x 230mm oval with flat ends. 16 spaces on three lines. Replacement year stamp is 15mm high) Stamp can be furnished without date on request. Special order only.

Fluted rub brick

Fluted silicon carbide rub brick with handle, for fast and easy smoothing and dressing down

| Ł | Round | rub |
|---|-------|-----|
| | brick | |

Lightweight round rub brick with handle is 25mm thick and 150mm diameter. Code Description

CF400-18Stamp with '2018' insertCF401-18'2018' date insert onlyCF401-19'2019' date insert only

| Code | Size | Grit |
|-------|----------------------|------|
| CF270 | 150mm round | 20 |
| CF268 | 200mm x 90mm x 35mm | 20 |
| CF283 | 150mm x 75mm x 25mm | 20 |
| CF282 | 150mm x 75mm x 25mm | 60 |
| CF282 | 150mm x 75mm x 25mm | 60 |
| CC497 | 200mm x 180mm x 35mm | 20 |



Concrete Testing Equipment



Size

2000mm x 76mm x 25mm

3000mm x 76mm x 25mm



Surface deformation measurement.

A straight edge used to determine lateral surface regularity of a road or floor surface etc.

A lightweight straight edge equally supported at each end with an aluminium block, giving a set height between the concrete surface and straight edge.

Using the straight edge you can measure any vertical irregularity using an optional 2.5mm incremented wedge with a range of 12.5mm low to 12.5mm high.

 2.0m or 3.0m lightweight aluminium straight edge with carrying loops.

> 2.0m straight edge c/w with support blocks. Add item 26570 for the complete kit.

> 3.0m straight edge c/w with support blocks. Add item 26570 for the complete kit.

Metric graduated wedge for measurement

- Optional metric graduated measuring wedges marked every 2.5mm available.
- Measuring range 12.5mm low to 12.5mm high

Description


Product code

26550

26555

26570







Cube Test Moulds

- Lightweight mouldS
- Quick & easy to strip
- Re-useable many times.
- Recyclable
- 100mm & 150mm
- Lower freight costs
- No manual handling issues.

| Description |
|---------------------------------|
| Single 150mm plastic cube mould |
| 6-pack 150mm plastic cube mould |
| Single 100mm plastic cube mould |
| 6-pack 100mm plastic cube mould |
| |

Plastic concrete test Moulds







Bricklaying Trowels

Wide London Pattern

Standard Shank



| Leather Handle | | | | | | | | |
|----------------|-----------------|----------------------|--|--|--|--|--|--|
| Code | Blade Length | Heel Width | | | | | | |
| R0312-10 | 10" | 5 ¹ /2" | | | | | | |
| R0312-11 | 11" | 5 ⁵ /8" | | | | | | |
| R0312-12 | 12" | 5 ¹³ /16" | | | | | | |

Only one quality... World Renowned Excellence!

Narrow London Pattern

Standard Shank



| Leo | Leather Handle | | | | | | | | |
|----------|-----------------|--------------------|--|--|--|--|--|--|--|
| Code | Blade Length | Heel Width | | | | | | | |
| R0316-10 |) 10" | 4 ¹ /2" | | | | | | | |
| R0316-11 | 11" | 4 ³ /4" | | | | | | | |
| R0316-12 | 2 12" | 5" | | | | | | | |
| | | | | | | | | | |

| Wood Handle | | | | | | | |
|---------------------------------|-----|--|---|--|--|--|--|
| Blade Heel Code Length Width | | | | | | | |
| R0116-10 | 10" | 4 ¹ /2" | | | | | |
| R0116-11 | 11" | 4 ³ / ₄ " | P | | | | |
| R0116-12 | 12" | 5" | 5 | | | | |

Plastic Handle

RRICKLEVING TOOL

| Code | Blade Length | | |
|---------------------------|---------------------------|----------------------|---|
| R01412-9 ¹ /2 | 9 ¹ /2" | 5 ³ /8" | |
| R01412-10 | 10" | 5 ¹ /2" | T |
| R01412-10 ¹ /2 | 10 ¹ /2" | 5 ¹ /2" | |
| R01412-11 | 11" | 5 ⁵ /8" | |
| R01412-11 ¹ /2 | 11 ¹ /2" | 5 ³ /4" | 1 |
| R01412-12 | 12" | 5 ¹³ /16" | |

Soft Grip Handle Heel Blade Code Length Width R0112-91/2 SH 9¹/2" 53/8" R0112-10 SH 10" 5¹/2" R0112-10¹/₂ SH 10¹/2" 5¹/2" R0112-11 SH 11" 5⁵/8" R0112-11¹/₂ SH 11¹/2" 5³/4" R0112-12 SH 12" 5¹³/16"

| Wood Handle | | | | | | | |
|---------------------------------|-----|----------------------|---|--|--|--|--|
| Blade Heel Code Length Width | | | | | | | |
| R0112-10 | 10" | 5 ¹ /2" | 2 | | | | |
| R0112-11 | 11" | 5 ⁵ /8" | | | | | |
| R0112-12 | 12" | 5 ¹³ /16" | - | | | | |

| Plastic Handle | | | | | | | | |
|---------------------------------|---------------------------|--------------------|----|--|--|--|--|--|
| Blade Heel Code Length Width | | | | | | | | |
| R01416-9 ¹ /2 | 9 ¹ /2" | 4 ¹ /4" | | | | | | |
| R01416-10 | 10" | 4 ¹ /2" | πÌ | | | | | |
| R01416-10 ¹ /2 | 10 ¹ /2" | 4 ⁵ /8" | | | | | | |
| R01416-11 | 11" | 4 ³ /4" | | | | | | |
| R01416-11 ¹ /2 | 11 ¹ /2" | 4 ⁷ /8" | 5 | | | | | |
| R01416-12 | 12" | 5" | | | | | | |

| Soft G | Fip + | land | le |
|-----------------------------|---------------------|---------------------------|-----|
| Code | Blade Length | Heel | |
| R0116-9 ¹ /2 SH | 9 ¹ /2" | 4 ¹ /4" | |
| R0116-10SH | 10" | 4 ¹ /2" | fer |
| R0116-10 ¹ /2 SH | 10 ¹ /2" | 4 ⁵ /8" | I |
| R0116-11 SH | 11" | 4 ³ /4" | |
| R0116-11 ¹ /2 SH | 11 ¹ /2" | 4 ⁷ /8" | |
| R0116-12 SH | 12" | 5" | |

Bricklay

Bricklaying Trowels

5½" Leather

Seasoned wood wrapped in genuine leather providing a smooth, comfortable grip. Fitted with steel ferrule.

6" Soft-grip

Unique soft textured, contoured handle - tough, rugged, well balanced.

5¼" Plastic

Tough and rugged amber plastic – will not mushroom from tamping bricks or concrete blocks

6" Wood

Comfortable, smooth wooden handle with steel ferrule.

Philadelphia Pattern

SINCE // 1798

TOOLS ENDURE

Standard Shank

| | Leather | | | | | | | | |
|---|----------|--------|---|--|--|--|--|--|--|
| | | Blade | Heel | | | | | | |
| | Code | Length | Width | | | | | | |
| - | R0310-10 | 10" | 51/4" | | | | | | |
| 1 | R0310-11 | 11" | 5 ⁷ / ₁₆ " | | | | | | |
| | R0310-12 | 12" | 5%16" | | | | | | |

| Wood | | | | | | |
|----------|-----------------|--------------------|---|--|--|--|
| Code | Blade Length | | | | | |
| R0110-10 | 10" | 5 ¹ /4" | | | | |
| R0110-11 | 11" | 57/16" | | | | |
| R0110-12 | 12" | 5% 16" | 1 | | | |

Amber Plastic

| Code | Blade Length | | |
|---------------------------|--|---------------------|---|
| R01410-9 ¹ /2 | 9 ¹ / ₂ " | 5 ³ /16" | |
| R01410-10 | 10" | 5 ¹ /4" | |
| R01410-10 ¹ /2 | 101/2" | 5 ³ /8" | 1 |
| R01410-11 | 11" | 57/16" | |
| R01410-11 ¹ /2 | 11 ¹ /2" | 5 ¹ /2" | |
| R01410-12 | 12" | 5% 16" | |

| Soft Grip | | | | | | | |
|---|-----------------|---------------------|----|--|--|--|--|
| Code | Blade Length | | | | | | |
| R0110-9 ¹ / ₂ SH | 91/2" | 5 ³ /16" | | | | | |
| R0110-10 SH | 10" | 51/4" | TE | | | | |
| R0110-10 ¹ / ₂ SH | 101/2" | 5 ³ /8" | T | | | | |
| R0110-11 SH | 11" | 57/16" | | | | | |
| R0110-11 ¹ / ₂ SH | 11 1/2" | 5 ¹ /2" | | | | | |
| R0110-12 SH | 12" | 5 %16" | | | | | |

| Specie Buttering Trowel R074 | Sew Trov R0427- | /er vel | Pa | tte Mud Trowe R06302 | | | Buck Frowe | | | npkin cowel R0414-9 |
|---------------------------------------|----------------------------------|------------|----------------|--------------------------------|----------------|-----------|---------------|-----------------|---|---------------------------|
| Pointing | Code | GG423 | R074 | R0427-9 ¹ /2 | R06302 | R06301 | R075 | R055 | 1 | |
| GG423 | Blade Length Heel Width | 7" 3" | 71/2" 31/2" | 91/2" 6" | 71⁄2" 53⁄8" | 8" 5¾" | 7" 3³⁄16" | 71/2" 47/16" | | Tile owels |

Trowels & Jointers

RRICKLAYING TOOL

Pointing Caulking Margin Trowels Trowels Trowels GG421L - 4¹/2" x 2¹/4" BL761L - 7"x 3/16" GG422L - 51/2" x 21/2" BL762L - 7"x 1/4" GG431L - 5"x 1¹/₂" GG423L - 7"x 3" BL763L - 7"x 3/8" GG432L - 5"x 2" GG424L - 5"x 21/2" BL764L - 7" x 1/2" GG433L - 8"x 2" BL765L - 7"x 5/8" GG434I - 6"x 2" BL766L - 7"x 3/4" BL767L - 7"x 7/8" BL768L - 7"x 1" Gauging Cross-Trowels Joint Duck Bill GG443L - 7"x 31/4" Trowels Trowels GG445I - 5"x 1³/₄" GG444L - 10"x 2" Handle Codes: Wood - use number only (eg GG443) **Jointers** Convex Barbell Jointers **Jointers** R05121-3/8x1/2 **Bullhorn** BL390 - 1/2" and 5/8 R05121-1/2x5/8 R05121-3/4x7/8 Jointers Pack of 2 R05121-5/8x3/4 R050421/2 - 1/2" large end R05121-7/8x1 Concave R050425/8 - 5/8" large end R05121-1x1/8 Hubbard R05121-11/8x11/4 Jointers R050427/8 - 7/8" large end Jointers R05321-3/8x1/2 R05321-1/2x5/8 BL280 - 1/2", 5/8", 3/4" R05321-3/4x7/8 and ⁷/₈" barrels R05321-5/8x3/4 Replacement R05321-7/8x1 barrels available R05321-1x1/8 **Sled Runners** 'V' Shape BL214PF - 14" x 3/4" Half Round Convex BL220PF - 20" x 3/4" BL215PF - 14" x 1/2" BL220 - 20" x 3/4" BL216PF - 14" x 5/8" BL226 - 20" x 1/2" BL227 - 20" x 5/8" BL229 - 20" x 3/4" **Other sizes** Hubbard available to order. BL286 - 14" x ³/4"





Salisbury

1 Ashfield Trading Estate, Ashfield Road, Salisbury, Wiltshire, SP2 7HL

Tel: 01722 416196 • Fax: 01722 416197

Export enquiries (International) Tel: +44 1722 416196 • Fax: +44 1722 416197

Glasgow

Unit 29, Riverpark Industrial Estate, Napier Street, Linwood, Glasgow, PA3 3AJ

Tel: 0141 849 0077 • Fax: 0141 587 0910

Norfolk

Unit 1, 70 Station Road, Terrington St. Clement, Kings Lynn, Norfolk, PE34 4PL

Tel: 01553 829530 • Fax: 01553 827713

Stafford

The Concrete Place, Common Road Industrila Estate, St Albans Road, Stafford, ST16 3DR

Tel: 01785 332891 • Fax: 01785 258364

www.speedcrete.co.uk email: sales@speedcrete.co.uk

