



www.speedcrete.co.uk Email: sales@speedcrete.co.uk



The United Kingdoms finest selection of Concrete and Bricklaying tools can be found at Speedcrete.

We are challenging the way we think and the way we work, to transform our products, our business, and our brand to create even more value for our customers.









CONCRETE CURING SYSTEMS























Maintenance

Speedcrete complete all maintenance on our hire fleet equipment, stocking all spare parts required. Customers buying new or used equipment can rely on our maintenance service at a choice of four depots when required.





Used Equipment

Speedcrete guarantee a minimum of 30 day to a maximum of 180 days on our used sales machinery and products. All products sold as used have been part of our hire fleet, this means all equipment is tried and tested and maintained throughout to an exceptional standard.





LEVELLING EQUIPMEN

ROLLER SCREEDS

HDX780

With never before seen features like the heads-up display, the newly designed seat frame for better visibility, and the built-in 'Intelli-Power' system, the HDX780 riding trowel truly stands alone in the industry. This machine uses these new features to ensure maximum performance from its Bosch-Rexroth hydraulic components but also increases its lifetime. The HDX780 will be available in a standard rotation or counter rotation.







Digital

18gal (68Ltr) Fuel Capacity.

Hatz 4H50tic readouts for (T4F) accurate fuel Diesel levels and Engine. diagnostics.

60in

(152cm) 6 Blade Rotors.



Available in counter rotation

Six adjustable LED lights


Flat Finish Blades

8" x 23" Finish - Gold Series, COMES WITH THESE MACHINES

SPECIFICATIONS	HDX780
ENGINE	Hatz 4H50TIC (T4F)
HORSEPOWER CLASS	74 hp (55 kW)
FUEL TYPE	Diesel
PANNING PATH WIDTH	140 in (356 cm) 12′ Class
ROTOR DIAMETER	60 in (152 cm) 6-Bladed Rotor
ROTOR ROTATION	Standard or Counter Rotation
MAXIMUM ROTOR SPEED	130 rpm
STEERING CONTROL SYSTEM	Power
FUEL CAPACITY	18 gal (68 L)
RETARDANT CAPACITY	6 gal (23 L)
WEIGHT	2,836 lb (1,286 kg)
DIMENSIONS (L X W X H)	147.8 x 68.3 x 64.4 in (375.4 x 173.5 x 163.6 cm)







The Allen riders are designed to give ease of access for maintenance.

Hydraulic joystick power steering ensures you can manoeuvre around the concrete surface with ease.



Speedcrete can supply most models of Allen Rideon Power Trowels with diffrent engine variations throughout the range. Please feel free to ask a member of our team so we can advise and give you lead times on delivery.

ROLLER SCREEDS



MP215

This MP215 rider is loaded with features found on our larger riders and the renowned durability of all Allen equipment.



It is equipped with a reliable Honda air-cooled petrol engine, a heavy-duty drive-train on an easy-to-service frame. This versatile rider can be used for slab on grade, paving, and other projects.







)

6gal (23Ltr) Fuel Capacity. Honda GX690 (688cc) Air- m cooled petrol Rot Engine.

165rpm 36in (91) maximum 4-Bladed Spider. Rotor Speed.

SPECIFICATIONS	MP215
ENGINE	Honda GX690 (688 cc)
HORSEPOWER CLASS	22.1 hp (16.5 kW)
FUEL TYPE	Air-Cooled Gasoline
PANNING PATH WIDTH	74 in (188 cm) 6' Class
ROTOR DIAMETER	36 in (91.4 cm) 4-Bladed Spider
MAXIMUM ROTOR SPEED	165 rpm
STEERING CONTROL SYSTEM	Manual
FUEL CAPACITY	6 gal (23 L)
RETARDANT CAPACITY	6 gal (23 L)
WEIGHT	735 l b (333 kg)
DIMENSIONS (L X W X H)	78 x 41 x 53 in (198 x 104 x 135 cm)



Finishing Blades: 6" x 14" Finish - Silver Series COMES WITH THE MACHINE.



MP245

The MP245 is our most compact hydraulic power steering riding trowel. This rider is packed with features found on our larger riders and the renowned durability of all Allen equipment. This rider is equipped with a reliable Honda air-cooled petrol engine, a heavy-duty drive-train and has an easy-to-service frame.



6gal Honda GX690 (23Ltr) Fuel (688cc) Air-Capacity. cooled petrol Engine.



165rpm 36in (91) maximum 4-Bladed Spider. Rotor Speed.

SPECIFICATIONS	MP245
ENGINE	Honda GX690 (688 cc)
HORSEPOWER CLASS	22.1 hp (16.5 kW)
FUEL TYPE	Air-Cooled Gasoline
PANNING PATH WIDTH	74 in (188 cm) 6′ Class
ROTOR DIAMETER	36 in (91 cm) 4-Bladed Spider
MAXIMUM ROTOR SPEED	165 rpm
STEERING CONTROL SYSTEM	Power
FUEL CAPACITY	6 gal (23 L)
RETARDANT CAPACITY	6 gal (23 L)
WEIGHT	830 l b (376 kg)
DIMENSIONS (L X W X H)	78 x 41 x 57.5 in (198 x 104 x 146 cm)



MSP445

The MSP445 is powerful and responsive due to its weight-to-horsepower ratio. The five-bladed rotor is driven by a super heavy-duty gearbox, allowing the power to be delivered where it's needed. Standard features include an electric-powered spray system and a built-in cup holder. For easier maintenance, the MSP445 features a removable front panel for easy access.









 $\overline{\mathbf{v}}$

7gal (26.5Ltr) Fuel Capacity.

Kohler Ech980 Manual (688cc) Air-Steering. cooled petrol Engine.

14: 1117

40in (117 cm)
5-Bladed Spider.

SPECIFICATIONS	MSP445
ENGINE	KOHLER ECH980 (999 cc) (EFI)
HORSEPOWER CLASS	37 hp (27.6 kW)
FUEL TYPE	Air-Cooled Gasoline
PANNING PATH WIDTH	97.5 in (248 cm) 8' Class
ROTOR DIAMETER	46 in (117 cm) 5-Bladed Spider
MAXIMUM ROTOR SPEED	180 rpm
STEERING CONTROL SYSTEM	Manual
FUEL CAPACITY	7 gal (26.5 L)
RETARDANT CAPACITY	7 gal (26.5 L)
WEIGHT	1,052 l b (477 kg)
DIMENSIONS (L X W X H)	101.5 x 50.5 x 59.5 in (257.8 x 128.2 x 151 cm)



Finishing Blades: 6" x 18" Finish - Silver Series COMES WITH THE MACHINE.



SPECIFICATIONS	MSP455			
ENGINE	KOHLER ECH980 EFI			
HORSEPOWER CLASS	37 hp (27.6 kW)			
FUEL TYPE	Air-Cooled Gasoline			
PANNING PATH WIDTH	97.5 in (248 cm) 8' Class			
ROTOR DIAMETER	46 in (117 cm) 5-Bladed Spider			
MAXIMUM ROTOR SPEED	180 rpm			
STEERING CONTROL SYSTEM	Power			
FUEL CAPACITY	7 ga l (26.5 L)			
RETARDANT CAPACITY	7 gal (26.5 L)			
WEIGHT	1,175 lb (533 kg)			
DIMENSIONS (L X W X H)	101.5 x 50.5 x 59.5 in (257.8 x 128.2 x 151 cm)			

MSP455

The redesigned MSP455 is our newest power steering model in our popular MSP Series. The powerful gas EFI engine, super heavy-duty gearboxes and spiders provide a great weight-to-horsepower performer for larger contractors.



7gal (26.5Ltr) Fuel Capacity. cooled petrol Engine.

 \bigcirc

Power

Steering.

46in (117cm) 5-Bladed Spider.

Honda GX690 (688cc) Air-

ROLLER SCREEDS














13gal (49Ltr) Fuel Capacity.

Hatz 3H50TIC Liquid-cooled Diesel Engine.

Digital readouts for accurate fuel levels and



HDX600

The HDX600 was designed with the high-volume flatwork concrete contractor in mind. This riding trowel comes with dedicated panning/ finishing modes, digital readouts for accurate fuel levels and diagnostics, and a large 13-gallon fuel tank for longer run times. It is also equipped with powerful pumps that help maintain excellent torque even at high rotor speeds. This makes the machine excellent for panning or finishing operations.

DIMENSIONS (L X W X H)

SPECIFICATIONS	HDX600
ENGINE	Hatz 3H50TIC
HORSEPOWER CLASS	50 hp (37.3 kW)
FUEL TYPE	Liquid-Cooled Diesel
PANNING PATH WIDTH	100 in (254 cm) 8' Class
ROTOR DIAMETER	46 in (117 cm) 6-Bladed Spider
MAXIMUM ROTOR SPEED	160 rpm
STEERING CONTROL SYSTEM	Power
FUEL CAPACITY	13 gal (49 L)
RETARDANT CAPACITY	6 gal (23 L)
WEIGHT	2,194 lb (995 kg)
DIMENSIONS (L X W X H)	107 x 52.5 x 61 in (271.8 x 133.4 x 154.9 cm)



13gal (49Ltr)

Fuel Capacity.





OR DEPARTMENT OF

diagnostics.

RIDING TROWELS: HYDRA DRIVE EXTREME // HDX SERIES

HDX605		Liquid-cooled Petrol Engine
SPECIFICATIONS	HDX605	
ENGINE	Kubota WG1605	
HORSEPOWER CLASS	57 hp (42.5 kW)	11
FUEL TYPE	Petrol	1-1-1
PANNING PATH WIDTH	101.5 in (257 cm) 8′ Class	
ROTOR DIAMETER	46 in (116.8 cm) 6-Bladed Spide	and the
MAXIMUM ROTOR SPEED	170 rpm	1 h
STEERING CONTROL SYSTEM	Power	
FUEL CAPACITY	13 ga l (49 L)	A section in
RETARDANT CAPACITY	6 gal (23 L)	
WEIGHT	2,049 lb (929 kg)	Stational Contraction

101.5 x 66 x 60 in

(257.8 x 167.6 x 152.4 cm)

Kubota Digital WG1605 accurate fuel Ы levels and diagnostics.

46in (117cm) readouts for 6-Bladed Spider.





BARIKELL POWER FLOATS



10.00

PEDESTRIAN POWER FLOAT ACCESSORIES





MK8-75 (30 inches)

This Barikell Ride-on Power Float has 2 rotors of 750mm diameters with 8 blades. With a working area of 1540mm and can be fitted with 750mm floating disc pans.

Model No.	Engine Manfacturer	Power HP	Power	No. of blades	Weight
3210	B & S	18	Petrol	8	195

MK8-90 (36 inches)

This hydraulic steer Barikell Ride-on Power Float has 2 rotors of 900mm diameters each, with 10 separate blades. With a working area of 1940mm this ride-on can be fitted with 980mm floating disc pans. We also have a 8 blade models if required.

Model No.	Engine Manfacturer	Power HP	Power	No. of blades	Weight
3265	Honda	20	Petrol	8	288
3269	Kubota	25	Diesel	8	315





MK10-90HCS (36 inches)

This Barikell Ride-on Power Float has 2 rotors of 900mm diameters with 10 blades. With a working area of 1540mm and can be fitted with 750mm floating disc pans. 8 blade versions are available.

Model No.	Engine Manfacturer	Power HP	Power	No. of blades	Weight
3337	Honda	26	Petrol	10	360
3331	Honda	26	Petrol	10	387

MK10-120 (48 inches)

This Barikell Ride-on Power Float has 2 rotors 1200mm diameters with 10 blades. With a working area of 2540mm and can be fitted with 1200mm floating disc pans.

Model No.	Engine Manfacturer	Power HP	Power	No. of blades	Weight
3339	Kubota	25	Diesel	10	360

MK10-120HCS (48 inches)

The Barikell MK10-120 ride-on power trowel, also known as 'The Monster' has 2 rotors 1200mm diameters with 10 blades. With a working area of 2540mm and can be fitted with ten braket 1200mm floating disc pans. Steering Hydraulic Joystick. Powered by a choice of Diesel D1305 Kubota engine or a Petrol Vanguard B&S.





This powerful power trowel is used by concrete professionals on large pours to produce impresive slab levelling outcomes.



Model No.	Engine Manfacturer	Power HP	Power	No. of blades	Weight
3339	Kubota	25	Diesel	10	360
3314	Vanguard	37	Petrol	10	345



PRT464 / PRT465

MASTERPAC'

Choose between the 4 or 5 blade models for this Masterpac ride-on trowel.

These models have a heavy duty gearbox which provides longer life & low maintenance. Comes with a steering system which features a twin stick multi-directional steering system providing immediate machine control & precise maneuverability, the fine hand control for blade pitch ensures precise blade adjustment.



Model	PRT464	PRT465
Bladed Spider	4-Bladed Spider	5-Bladed Spider
Net Weight KG (lbs)	420 (926)	425 (937)
Engine	Vanguard Br	iggs & Stratton
Engine Power KW(hp)	25.	7(35)
Rotors Diameter cm (in)	116.	8 (46)
Maximum Rotor Speed rpm	140	
Water & Fuel tank capacity L (gal)	18	(4.8)
Dimensions L x W x H cm (in)	254 x 129 x 14	3 (100 x 51 x 56)

MP46T

MASTERPAC

48" Pedestrian Power Float

46" diameters troweling machines are designed for all type of flooring applications for the concrete professional and can be used with either combination blades or finishing blades.

Engine: Honda GX270

Model No.	Engine Manfacturer	Power HP	Power	No. of blades	Weight	
MP46T	Honda	9	Petrol	4	107	



Model	PRT464
Bladed Spider	4-Bladed Spider
Net Weight KG (lbs)	320 (705)
Engine	Honda GX690
Engine Power KW(hp)	16 (22)
Rotors Diameter cm (in)	91.4 (36)
Maximum Rotor Speed rpm	140
Water & Fuel tank capacity L (gal)	14 (3.7)
Dimensions L x W x H cm (in)	1975 x 1000 x 1315 (78 x 39 x 52)

MP36T

MASTERPAC

36" Pedestrian Power Float

36" diameters troweling machines are designed for all type of flooring applications for the concrete professional and can be used with either combination blades or finishing blades.

Engine: Honda GX160

Model No.	Engine Manfacturer	Power HP	Power	No. of blades	Weight	
MP36T	Honda	5.5	Petrol	4	55	



24 Inch Pedestrian Edging Trowel

This type of power trowel is used for concrete slab edge work and around up-stand areas. Powered by the reliable Honda GX160 petrol engine this 24"/600mm float provides ample power to handle the usage of the pan (floating wheel) which comes free with this 4 blade machine.

Specifications	
PRODUCT CODE	SC24
ENGINE TYPE	Honda GX160
POWER HP	5.5
FUEL TYPE	Petrol
No. BLADES	4
WEIGHT	48kg
STARTER TYPE	Manual





The Speedcrete Edging trowel seen (image above) in a folded position for easy storage.



24 Inch Barikell Moskito Edging Power Trowels

The Barikell Moskito pedestrian power trowel is one of the most popular concrete finishing tools. These 24" pedestrian edging trowels offer excellent reliability and durability on the job site, can be easily stored and transported via the foldable handle.

Model No.	Engine Manfacturer	Power HP	Power	No. of blades	Weight
3000G	Honda	4	Petrol	4	53
3005G	Honda	5.5	Petrol	4	51
3014G	N/A	3.5	Electric 110V	6	55
3030	N/A	3.5	Electric 220V	6	55

The 3030 is 220V for usage in Europe.

30 Inch Barikell Moskito Edging Power Trowels

Model No.	Engine Manfacturer	Power HP	Power	No. of blades	Weight
3055G	Honda	5.5	Petrol	4	53
3055G/18	Honda	5.5	Petrol	4	54
3070G	Honda	3.5	Electric 110V	4	57



SPECIALIST FLOATS

36 Inch Barikell Power Trowels

The Barikell pedestrian power trowel is a professional concrete finishing tool which ensures quality slab finishing. Choose from our range of petrol, diesel or electric powered trowels.

Model No.	Engine Manfacturer	Power HP	Power	No. of blades	Weight
3100AFG	Honda	5.5	Petrol	4	74kg
3100FG	Honda	5.5	Petrol	4	76kg
3122G	N/A	3.5	Electric 110v	4	89kg
3121/9	N/A	3.5	Electric 220v	4	89kg
3120G/19	N/A	3.5	Electric 380v	/ 4	84kg
3123GD	Yanmar	3.5	Diesel	4	85kg

46 Inch Barikell Power Trowels

The Barikell pedestrian power trowel is a professional concrete finishing tool which ensures quality slab finishing. The extra weight of the 46" helps to draw up more water which is very useful in warm conditions when working on large concrete slabs.

Model No.	Engine Manfacturer	Power HP	Power	No. of blades	Weight
3155FG	Honda	9	Petrol	4	99kg
3155LFG	Honda	9	Petrol	4	101kg
3160FG	Honda	11	Petrol	4	101kg
3160LFG	Honda	11	Petrol	4	101kg
3187LFG	Yanmar	7.5	Diesel	4	98kg
3187F	Yanmar	7.5	Diesel	4	98kg
3188F	Yanmar	10	Diesel	4	108kg



On request:

Barikell can build models with extra features to your specification. Below is the description and code which you can use to stipulate your preference.

Long handle (L) Folding handle (P) Opening frame (A) Centrifugal stop (C) Stabilizer ring (S) Lifting hook (G) Short quick pitch handle (/8) Long quick pitch handle (/9)





MAGNESIUM FLOATS



Pans (floating discs)

Pans can be attached to combination or trowel blades. When pan floating is completed, finishers can remove the pans and immediately start troweling. To attach a pan to a trowel, lay the pan on the concrete, then set the machine on the pan. Start the engine and slowly rotate the blades until they engage the clip angles welded to the top of the pan.

How the pan system works

Buying the suitible pan for the equipment you have is very important.

- A 4 blade pedestrian which uses one pan requires a 4 bracket pan.
- A 4 blade ride-on Power Trowel which uses two pans requires 8 bracket pans.
- A 5 blade ride-on Power Trowel which uses two pans requires 10 bracket pans.



Ride-on Power Trowels have two rotating trowel disc which spin in the opposite direction to one-another, this is why a pan with double the ammount of brackets to trowel blades is required.


Part No.	Diameter	Blades	Brackets
B424 PAN	600mm/24″	4-Blades	4
B430 PAN	760mm/30″	4-Blades	8
B436B	980mm/38.5″	4-Blades	8
B436 PAN	940mm/38″	4-Blades	8
B446 PAN	1170mm/68″	4-Blades	8
8448 PAN	1200mm/48″	4-Blades	8
B446/5PAN	1170mm/68″	5-Blades	10
B448/5PAN	1220mm/48″	5-Blades	10

Please feel free to contact a member of the Speedcrete team if you require guidance on which pans are compatible with the Power Trowel model you are using.





PEDESTRIAN POWER FLOATS



Weighing just...

20kg when full of fuel

This trowel can be operated via a pole which means you don't need to walk on the surface.

Get on the surface quicker! The Pole Trowel

This Pole Trowel is operated via a a switch which can be pulled close to the operator to turn the 4 stroke Honda Petrol engine off or on.

Product Code: RT28



Finish Blades

A selection of finishing blades for ride-on and pedestrian trowels.

Part No.	Machine	Blades per pack
20455	24" Moskito	4
20454	30″ Moskito	4
4223	MK8-75 Rider	4
20457	36″ Finish Blade	4
20456/5	46″ Finish Blade	5

Combination Blades

Combination blades are designed for operators who wish to use one blade for both floating and finishing applications. During the initial stages of power trowelling the blade is set flat and is used for floating, as the slab firms up the blade pitch is increased to produce a smooth finish.

Part No.	Machine	Blades per pack
20483	36" Combination	4
20484/5	46" Combination	5

Polypropylene Blades

These polypropylene blades are used on coloured concrete to protect the potential staining that can be caused by using traditional steel concrete blades. The plastic finish blade produces a hard burnish mark free finish on light-reflective concrete.

Part No.	Machine	Blades per pack
20455	24" Edging Float	4
20483P	36" Combination	4

Flat Concrete Finishing Shoes

Designed to prevent foot marks from heavy site boots from the finished surface. We supply finishing shoes in three sizes: The flat shoes are used for concrete finishing.

Model No.	Shoe Type
FSHOE-M	Flat concrete shoe medium
FSHOE-L	Flat concrete shoe large
FSHOE-XL	Flat concrete shoe extra-large





Spiked shoes a perfect for when working on epoxy floors. See page ... for more details.





The Bunyan Roller Striker

The Bunyan Striker Roller screed is a hydraulically powered machine which fits to steel spinning tube that levels concrete for flat slabs and slopes.

The Bunyan Striker cuts elevation and compresses the concrete at the same time. As it presses downward and forward, material is either swept forward or pressed down to elevation.

The Bunyan Striker roller screed system is robust enough to spin full diameter, full length tubes that other smaller roller screed manufacturers can't compete with. Please feel free to make contact for prices.



Model Options



(▫┳ᠯ) Diesel: Kubota 0C95-E Power Unit





Petrol: Honda 4 Stroke Engine GX340




The Bunyan Strikers can be hired, simply pick a diesel or a petrol model and specify the tube length required.











Bunyan Powerpack (Honda BSHYD GX390 petrol engine, control driver and pull handle).



Coneheads Square Drive

Replaceable cone ends. These are used in conjunction with the Bunyan Striker when using 6" bare-end tubes. When used with the bolt system these coneheads splip into the tube and when the bolts are tightens they expand

Part No.	Description
	Conehead Square Drive 6″ tube. Hot End Conehead Square Drive 6″ tube. Cold End Bolts for the coneheads

ROLLER SCREEDS



RT10 Roto Screed

When it comes to flatwork concrete the RT10 is powerful enough for jobs requiring up to 8.5 metre tube lengths.





 Part No.
 Description

 RT10
 Rotoscreed drive unit GX100 and T-Bar.

> Self Aligning End Plug 6"



Replaceable cone ends. These are used in conjunction with the RT10 or RT6 when using 6" bare-end tubes.

Part No.	Description
TP6	End Plug Drive 6″ tube.

GX100 Honda Motor

Power comes via a Honda GX100 unit providing ample power and unparalleled reliability.

Quick Overview

- 3.0 HORSE POWER
- 15.8mm Straight Shaft
- 59.8mm shaft length,
- Recoil Start
- No Oil Alert
- 4-stroke petrol unleaded
- Cast iron sleeve

Easy starting, fuel efficient performance day in and day out.





Wheel System

As lightweight and compact as the RT10 is, some users like to purchase the extra wheel system which is specially designed to move across sites with ease. Please speak to a member of the Speedcrete team if you would like to purchase this wheel system.

FEATURES

- Lightweight
- More compact
- New Hydraulic Drive System Honda 4 stroke engine
- Cost effective and economical to buy and operate
- Engine and gearbox mounted on the end of the tube
- Ideal for small pours and metal decking
- Easily connected and dismantled
- Can be used with 6" or 4.5" Diameter Tubes
- Can be used with tube lengths up to 8.5 metre



ROLLER SCREEDS

RT6 Roto Screed

The RT6 Rotoscreed Mini Striker is ideal for small concrete pours and is powered by a Honda GX35 unit providing ample power and unparalleled reliability.

The RT6 comes equipt with a 6 metre 4.5 inch tube and removable drive ends.





The RT6Rotoscreed is a lightweight mechanically driven unit which works off a simple drive chain which means it is easy to maintain and incredibly reliable on site.

The unit is small, portable and lightweight but still offers you the advantages of a larger roller screed. The RT6 Rotoscreed is ideal for small pours and metal decking jobs. The lack of hydraulic hoses means the unit is very easy to clean.

Part No.	Description
RT6	Rotoscreed drive
	unit GX35.
TP45	4.5″ tube plug
Roto06.0BE	Bare 4.5" tube upto 6m

All Parts in the above table are included with your RT6 purchase, the 4.5 diameter tube which is 6 metres long can be cut down to a shorter tube if required. Self Aligning End Plug 4.5″



Replaceable cone ends. These are used in conjunction with the RT10 or RT6 when using 4.5" bare-end tubes.

Part No.	Description
TP45	End Plug Drive 4.5″ tube.





HONDA

The RT6 Rotoscreed Mini Striker is ideal for small concrete pours and is powered by a Honda GX35 unit providing ample power and unparalleled reliability.

The lightweight RT6 is a mechanically driven unit which works off a simple drive chain, this means it is easy to maintain and incredibly reliable on site.



Steel Tubes

Replacement tube complete with pre-welded steel ends. Available in a range of sizes. Please click the Enquiry button and we will get back to you with a price.



These Steel Tubes are use to level concrete and can be supplied in 4.5" or 6" diameter.

Irregular Conical and Hour-glass Tubes



Speedcrete often gets special requests to make tools for unique concrete projects. We have come up with many solutions over the years for interesting projects, for example: Conical Tubes (below) and an hour-glass tube pictured (above) in action powered by the Bunyan Striker.



Tube Maintenance and Repair





Speedcrete can cut down and weld your tubes for you. Sometimes a damaged tube can be re-used by making it shorter. We can take a look at your equipment and assess the best plan of action.

Ditching Tube

This is another custom-made tool which we created. This Ditching Tube was made to create a circular channel which ran around a livestock holding area for drainage purposes. This tool was specially made to the customers specification out of steel.





ROLLER SCREEDS

The Multivibe Powerscreed



 Part No.
 Description

 MV1000
 Power rod with two handled screed assembly c/w engine.

The Multivibe Powerscreed is designed to run on the surface of the concrete without form work, this allows flood pouring to complete a slab.

Available with a variety of Magnesium screed beams (sold seperately) up to a maximum width of 24ft (7.3 metres).

Vibrating concrete with a Multivibe will compact and create stronger concrete, while also saving back fatigue. In other words, it makes the job easier and gives you a better finished product.

Magnesium Screed Bars See next page.









Drill Screed

The PR100D is powered by lithium battery hammer drill for applications when fuel emissions are not allowed. Multivibe has tested with a DeWalt hammer drill in drill mode (DCD996). This 20V battery can do two loads of concrete with still half of the battery life left. Each battery should give over an hour of continuous use.

Part No. Description

PR100D Drillscreed with two handled screed assembly and DeWalt DCD996 combi drill kit.

ery can Il half of should use. t.

Drill kit includes: 2 lithium-ion batteries, mains charger and carry case.

Multivibe Dual Purpose Screed

A unique Dual purpose screed for those contractors wishing to maximise their capital outlays. The hummer screed represents two machines in one. Featuring a hummer poker which when not attached to the frame, can quickly and easily vibrate air pockets from your slab, then simply clamp the poker into the screed frame to screed off your finished slab.

	Part No.	Description
--	----------	-------------

MV2HH Two handled screed assembly, engine, detachable flex with 2x4" poker head..

The Multivibe bars are sold seprately. See the next page to view our range of magnesium floater bars.



Multivibe Floater Bars

Multivibe free screeding bars are the most reliable on the market. Will fit Multivibe, Vibra Strike & Screed King screeds. Features Multivibe Quick Release System.


Multivibe quick release floater bars feature a fast no tools attachment system allowing you to quickly change blade sizes without any tools. These bars are manufactured in magnesium in multiple blade sizes (see table below).

MULTI **VIBE**

Magnesium is up to 33% more durable than aluminium, in addition, magnesium alloy is far more rigid and offers much less sag than aluminium bars. This means that your floor will be more accurate.

Bar Length	Weight
4′ (1200mm)	6.0kgs
5′ (1500mm)	7.1 kgs
6′ (1800mm)	8.2kgs
8′ (2400mm)	10.4kgs
10′ (3000mm)	12.6kgs
12′ (3650mm)	14.8kgs
14′ (4200mm)	28.8kgs
16′ (4800mm)	31.0kgs
18′ (5400mm)	34.0kgs
20′ (6000mm)	37.0kgs
	4' (1200mm) 5' (1500mm) 6' (1800mm) 8' (2400mm) 10' (3000mm) 12' (3650mm) 14' (4200mm) 16' (4800mm) 18' (5400mm)

Magnesium is 33% more durable than Aluminium.





Speedcrete hire out Mutivibes and the floater bars on a regular basis. Feel free to enquire.








The Gen3 MagVibe utilizes high frequency vibration at the float, not at the handle, to increase productivity and minimise fatigue. It has three speeds for optimal vibration control, is water resistant, and can operate up to 20 hours on a single charge. Bolts onto traditional floats with the QAS[™] quick attach system and has tool-less innovation for easy removal. Built-in 24V Lithium Ion Battery included.

The Gen3 MagVibe immediately turns concrete floats into vibrating floats.



Gen3 MagVibe Charger: 100-240VAC; 50-60 HZ dual voltage charger. Note: Using a different charger other than this one will cause damage to the MagVibe battery and will void warranty.



Double Beam Screed

Our extendible double beam screed offers a traditional way to level concrete. This double beam screed vibrates the concrete as you level it along the form, ideal for concrete slabs between 3.5 mtrs and 6.0 mtrs wide.

Powered by Honda GX160 engine unit the power source provides reliability and powerful vibration along the full length of the double beam screed. The unit provides for compaction down to 300mm due to the high amplitude vibrations and centrifugal force. Easy, setup and removal via the quick clamp system mean less wasted time at the Jobsite.

Part No.	Description
DBS-EXTH	Extendible screed with Honda engine (3.0m - 6.0m).



Consolidating Concrete

VIBRATORY POKERS

One of the big challenges on construction projects is to get concrete adequately vibrated. Vibratory pokers help to consolidate concrete by removing excessive air and making the concrete into a uniformly solid mass with the needed properties. Without removal of air pockets in the concrete you will have voids called honeycombing which will produce a porous and unattractive cured slab of low strength.

Multivibe Hummer Concrete Vibrator

This gas powered concrete vibrator is a flex hose vibrator featuring a Honda 4-stroke motor. Vibrator heads and flex hoses can easily be changed. All Multivibes have a petrol powered Honda GX35 engine which provides ample power and exceptional reliability in all conditions.

Part No.	Description
HUM4/1	Hummer 4ft shaft 1" Head
HUM4/2	Hummer 4ft shaft 2" Head
HUM6/1	Hummer 6ft shaft 1" Head
HUM6/2	Hummer 6ft shaft 2" Head
HUM8/1	Hummer 8ft shaft 1" Head
HUM8/2	Hummer 8ft shaft 2" Head

The most popular choice!

Compatible Replacement Heads

Choose from three styles for the Hummer Multivibe. The HM800 comes as standard on each complete model.

HM100



MV200









Honda GX35 Commerial 4 StrokeEngine

Specifications: 1.6hp Petrol 0.6 ltr 173vpm Recoil starter





Speedcrete always have Hummer Multivibe vibratory pokers in our hire fleet. This gives our customers the opportunity to try one out and then buy one new or buy a used one. All our ex-hire fleet products are maintained to a high standard and can be found in the 'USED' section on our website.

VIBRATORY POKERS





Multivibe Hummer Concrete Vibrator

The OZTEC BP50 4-Stroke petrol backpack concrete vibrator is powerful portable and reliable. Oztec petrol power units provide ultimate and immediate adaptability on the job. Utilizing a rugged and dependable Honda engine coupled to our "speed-up" transmission vibrator heads develop 12000 vpm and never drop below 10000vpm. Even in the heaviest low slump concrete loads. (Tested in near 0 slump concrete). This 10000 - 12000vpm range is essential for high-quality concrete.

Part No.	Description
BP50	Back pack & power unit
FS070Z	2.1 m flexible shaft
FS100Z	3m flexible shaft
H2000Z	Hummer 6ft shaft 2″ Head
H2500Z	Hummer 8ft shaft 1″ Head
Other sizes of flexible shafts and poker heads available on special order.	





Technoflex Classic Frame Vibrator

This pendulum drive style concrete poker vibrator from Technoflex has a Honda Powered Four-stroke petrol motor which operates at 3.200 rpm is air-cooled and protected by a metal cage. A fantastic vibratory poker for many concrete applications.

Fitted with a Dynapac type drive coupling, a 5m flex with a 45mm head.

Product Code: CLAS/5-45



Petrol and Diesel versions are available.

VIBRATORY POKERS





High Frequency Electric Vibrators

Eliminate the need for stand alone convertors with this range of high frequency electronic concrete pokers. With an intergrated converter these pokers offer great versatility of application. The electronic components are well protected against power surges and vibration, offering greater safety, reliability and handling.



Gold

Model No.	Flex Length	Head Diameter	Head Length	Frequency	Power Cable Length
EDF-38LT	7 meter	38mm	360mm	13,500	15
EDF-50LT	7 meter	50mm	398mm	12,000	15
EDF-60LT	7 meter	60mm	405mm	12,000	15
EDF-70LT	7 meter	70mm	398mm	12,000	15

Silver

Model	Flex	Head	Head	Frequency	Power Cable
No.	Length	Diameter	Length		Length
MEF-38	4 meter	38mm	360mm	13,500	5
MEF-50	4 meter	50mm	333mm	12.000	5



Pneumatic vibrator VNF

These compressed air driven concrete pokers run at a high frequency to consoladate internal friction within the fresh concrete to release air bubbles and compact the concrete mix.

Compressed air concrete pokers are:

- Specially designed to work in ATEX atmospheres
- 100% Waterproof
- Free from electricity safe to operate
- Maintenance free no moving parts inside the hose
- Free from overheating
- Robust, providing a long life for the vibrating needle head



Model No.	Flex Length	Head Diameter	Frequency	Air Consumption
VNF-25	3 meter	25mm	14,000	350
VNF-40	3 meter	40mm	13,000	420
VNF-50	3 meter	50mm	12,500	520
VNF-58	3 meter	58mm	12,000	700
VNF-80	3 meter	80mm	9,500	1,500

PEDESTRIAN POWER FLOAT ACCESSORIES





Technoflex Rabbit Vibrators

The Technoflex Rabbit High Frequency electric motor can be connected to a range of vibratory flex hoses supplied by Speedcrete. When petrol or diesel motors are not an option this double insulated electric motor has a high level of performance for vibrating concrete.





Part No.	Flex Length	Head Diameter
141049R022	2 meter	25mm
141367R022	2 meter	38mm
141367R082	2 meter	48mm
141049R042	4 meter	25mm
141367R042	4 meter	38mm
141367R102	4 meter	48mm
141367R162	4 meter	60mm
141049R052	5 meter	25mm
141367R112	5 meter	48mm



All flex sizes fit the Rabbit motor.

Low Harm High Frequency Electric Vibrators

These Concrete Virbratory pokers have Incredibly low harm figures of 0.5 s/m2 A8 via an isolation damper system which allows for longer operator work times.

Model No.	Flex Length	Head Diameter	Head Length	Frequency	Power Cable Length
ULV38	7 meter	38mm	370mm	14,000	12
ULV50	7 meter	50mm	370mm	13,000	12
ULV60	7 meter	58mm	425mm	12,500	12

Rubber tip models are available.



VIBRATORY POKERS



Spyder Pro Concrete Vibrator

The high frequency Spyder Pro is a compact and cost efficient piece of equipment. Due to the converter and vibrator being an all in one package you don't need to purchase the equipment in 2 separate parts. The spyder Pro offers many of the same features as the AFP high frequency series, but with the added benefit that it is a complete product that doesn't require an external converter.

The Spyder Pro comes with a standard 15m electric cable and a choice of 7m or 5m Flex Hose. The transmission that connects directly into a 110v (16amp) power source.

Model No.	Flex Length	Head Diameter	Head Length	Vibrations per min	Power Cable Length
286613A17	7 meter	38mm	370mm	12,000	15
286615A17	7 meter	50mm	370mm	12,000	15
286616A17	7 meter	60mm	425mm	12,000	15
286613C41	5 meter	38mm	370mm	12,000	15
286615C41	5 meter	50mm	370mm	12,000	15

ELECTRONIC CONVERTER SPYDER PRO



Flex with Rubber Head

Special care rubber heads for coated rebar projects.

Some infrastructure projects require the use of epoxy/resin coated rebar. This is to act as a barrier so chloride corrosion of metals is prevented. Special concrete vibrators with a rubber head as opposed to metal head pokers are required to ensure the resin coating is not chipped away which could cause weak point in the rebar. Speedcrete does supply such vibratory pokers on special order.

Rubber Head Vibrators should always be used on coated rebar.





Coated epoxy/resin rebar requires particular care as any heavy handling could result in accelerated corrosion. This is when a small area is weakened and chloride corrosion can be detrimental to structural integrity.

Laser Staff

A Laser Staff is used typically in conjunction with the multivibe free screeding method of levelling the floor.

Use with a surveying laser to take spot level readings in grid patterns (see image below of laser staff with a receiver attached) before passing free screeder over the concrete surface.

Speedcrete supply three Laser Staffs which have different sized base plates for your preference.

Part No.	Description
LS100	Laser staff base plate 100 x 100mm.
LS200	Laser staff base plate 200 x 200mm.
LS300	Laser staff base plate 300 x 300mm.



You just can't seem to get the staff these days!



RL-H5A Topcon Laser Kit

Speedcrete supply Topcon lasers which give market leading performance and accuracy especially critical to produce a level and accurate floor.

Ensure you insist on a premium quality level from Topcon to maintain accuracy across the whole concrete slab. Cheaper lasers are prone to poor tolerance's the further you get from the laser source and will give inconsistent performance.



Specifications

- Working range of 800m 400m each way
- IP66 rating
- Accuracy of 1.44 over 30m
- Laser class 2
- 600rpm rotation speed
- Working temperature of -20c to 50c
- 5 year warranty





Poly Form

Speedcrete introduces Poly For the light weight, flexible alternative to traditional wood forming. Weighing 50% less than wood and having uniform heights makes poly forms the simple choice when forming superb curved slabs for irregular shaped applications.

This form system employs two types of form, one for straight work that has a metal cure for rigity and a flex form to create superb curves.

Material - Bapolene HDPE high density polyethylene co-polymer



Poly Meta Form / Straight

3.65 meters 4 inches 3.65 meters 6 inches



Poly Meta Form / Flex

869-420 3.65 meters 4 inches 869-620 3.65 meters 6 inches

Moisture resistant

€r €

<u>E1</u> E1


- Light weight
- Reusable
- Easy to clean .
- Will not warp or twist

Poly Form Accessories

The unique system utilizes plastic forms in conjunction with steel stake pockets to place concrete in areas which require a combination of curves and straight areas.

Slide Stake Pocket

The Slide Pocket reinforces the form joint and facilitates a stake which can be hammered into the ground and tightly secured.



Twist Pockets Stake Point This pocket can be inserted pocket at

any location along the form.





Stacking Pockets

The Stacking Stake Pocket firmly holds two forms in a stacked position, this example in the image below right shows a stacking pocket connected to a 4" Poly Form awaiting another form to be slid into place.












K-Form


K-FORM UPVC Screed Railing provides the construction industry with an economical, efficient and environmentally friendly alternative to steel and timber formwork. Each strip is 2400mm long. Designed for pours of 50 mm-100 mm thick concrete (when used in conjunction with K25 Riser).



Simply place 15mm of bedding motor & allow to set.

Made from 100% recycled materials, K-FORM is lightweight, durable and does not require removal after placement of concrete. It is easyily cut to length on site and has pre-drilled holes in the vertical face for placing steel dowel bars and in the base for anchoring. The patented design of K-FORM features a removal top strip for joint sealing and it's unique end clips allow for a quick and easy operation. Intended to be used with all types of screeds including: twin beams, roller strikers and vibratory strikers.





K-Form Extension Strip

This extension strip, illustrated here as the green section, allows an extra 25mm to be added to the slab height and integrates seemlessly with all K-Form screed rails.


Product Code: KFORMEXT25

K-Form Top Strip Angle Joint




Product Code: KF-X


Available in a range of sizes




K135 Screed Rail Product Code: KFORM150



K85 Screed Rail Product Code: KFORM100



K35 Screed Rail Product Code: KFORM35





Heavy Duty Steel Roadforms Square/Square

Heavy Duty Square/Square forms allow the quick forming of concrete slabs at the jobsite. These forms have dual square edges which are suitable for high tolerance concrete floors which demand exceptional accuracy.

Our square/square steel concrete forms are symmetrical in design so that you can place either the radius edge or the square edge downwards, depending on jobsite conditions. They also feature pre drilled dowel bar inserts at 300mm centres and three staking points to ensure the concrete forms do not move during the pour.

Length	Height
3 meters	10 centimetres
3 meters	15 centimetres
3 meters	20 centimetres
3 meters	25 centimetres
3 meters	30 centimetres
	3 meters 3 meters 3 meters 3 meters



Heavy Duty Steel Roadforms Square/Radius

The square radius forms feature a one square edge and one radius edge and offer a cheaper alternative to the Square/Square roadforms that we also have available.

Code	Length	Height
R/FORM 100-SR	3 meters	10 centimetres
R/FORM 150-SR	3 meters	15 centimetres
R/FORM 200-SR	3 meters	20 centimetres
R/FORM 250-SR	3 meters	25 centimetres



Flexible Steel Roadforms

We offer a number of flexible steel roadforms, which have been developed especially for carrying out radius work. They are ideal for creating curves and come in various depths to suit the thickness of your concrete slab or floor.

Code	Length	Height
R/FORM 100-FL	3 meters	10 centimetres
R/FORM 150-FL	3 meters	15 centimetres
R/FORM 200-FL	3 meters	20 centimetres



Sectional Screedrail System

This Screedrail kit consists of various lengths of 25mm diameter tubes which fit together to create a screedrail.

This secure connection allows the screeding roller tube to smoothly pass across the rails to give you an accurate level concrete finish.

This kit comprises of: 4×3.0 meter sections, 4×2.5 meter sections and 2×1.5 meter sections. These galvinised steel tubes plug-in together.





The integrated plug-in connections which are a feature of these rails, make it easy to join together securely. Code: AZL-EP25

Screedrail Support Chairs

Adjustable Metal Screed Chairs - designed and manufactured to produce accurate thickness of floor slab. The screed chair provides a stable support that is easily adjustable and will ensure the required depth of slab is maintained.

Round Stirrup Chairs

Code	Thread Adjustment	Min. Slab Thickness	Max. Slab Thickness
SC1R	30mm	120mm	150mm
SC2R	50mm	150mm	200mm
SC3R	100mm	200mm	300mm




Square Stirrup Chairs

Code	Thread	Min. Slab	Max. Slab
	Adjustment	Thickness	Thickness
SC1S	30mm	120mm	150mm
SC2S	50mm	150mm	200mm
SC3S	100mm	200mm	300mm



TRUSS SCREEDS



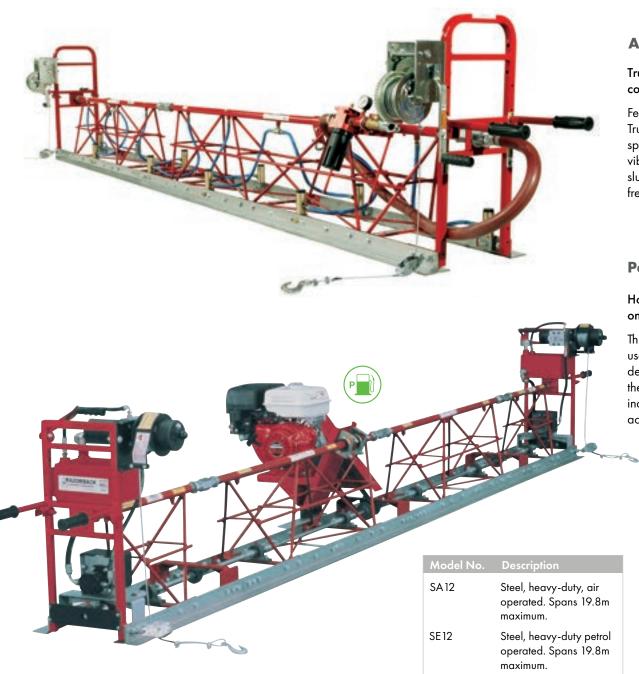

Air Driven Truss Screed

Truss Screeds provide maximum tolerances across large concrete bays.

Featuring the same quality steel frame as our SE 12 Petrol driven Truss Screed (see below), this compressed, air driven model has specially designed, precision engineered naval bronze piston vibrators. These vibrators provide concrete consolidation of low slump mixes. Allens vibrators are rust resistant, non-sticking and free starting for long life.

Petrol Driven Truss Screed

Honda or Kawasaki power from 5.5 HP to 9.0 HP is available on the SE12 petrol driven truss screed.

This engine-driven Allen® Razorback® Truss Screed has been used on countless projects around the globe for over four decades. With gasoline engine power, driving vibration, and the hydraulic winch option this self-contained truss screed is the industry standard for all steel framed truss screeds. Available with accessories for roadways, bridges, slab on grade, and more.

Enquire about carts

Speedcrete can construct carts which make moving sections of the Truss Screed simple.






Pivot Bracket

This unique accessory enables contractors to cut down on lc finishing costs by using a truss screed on a round tank botto sewage treatment plant tanks. See image below as an exan



Bridge Deck End Bracket System



Adjustable End Brackets

Rides on forms or wall brackets and can be adjusted both horizontally and vertically. Available with and without rollers. (shown with rollers).





Triple Roller Tube Paver

Introducing the all-new Allen Triple Roller Tube Paver (TRTP), the TRTP75. Equipped with an EFI 22.1 HP Honda engine, this lightweight, economical TRTP has the option of 6" or 8" roller tubes and ranges from 14' to 24' tube lengths (in 2' increments) for a variety of concrete pours.



SPECIFICATIONS

Honda IGX700 (EFI)
22.1 HP / 16.5 KW
Air-cooled petrol
-/-
14 - 24FT / 4.3 - 7.3M
6" in or 8" in / 15.24 - 20.32

User Controls and Platform

iGX700 (EFI) Engine 🝙

50 Gal Water Tank

The TRTP Range

The lightest weight and least expensive machine in the TRTP product group, the 75 enables contractors to use a machine that handles small paving pours that would otherwise be too heavy for a Truss Screed. The unit is a nice addition to the Triple Tube Paver group with some of the features and functions of the large size machines.


Grease Points



If a larger Triple Paver is required Speedcrete can take you through the larger machines in the TRTP range such as the TRTP265 which you can see in this image to the right.

an -



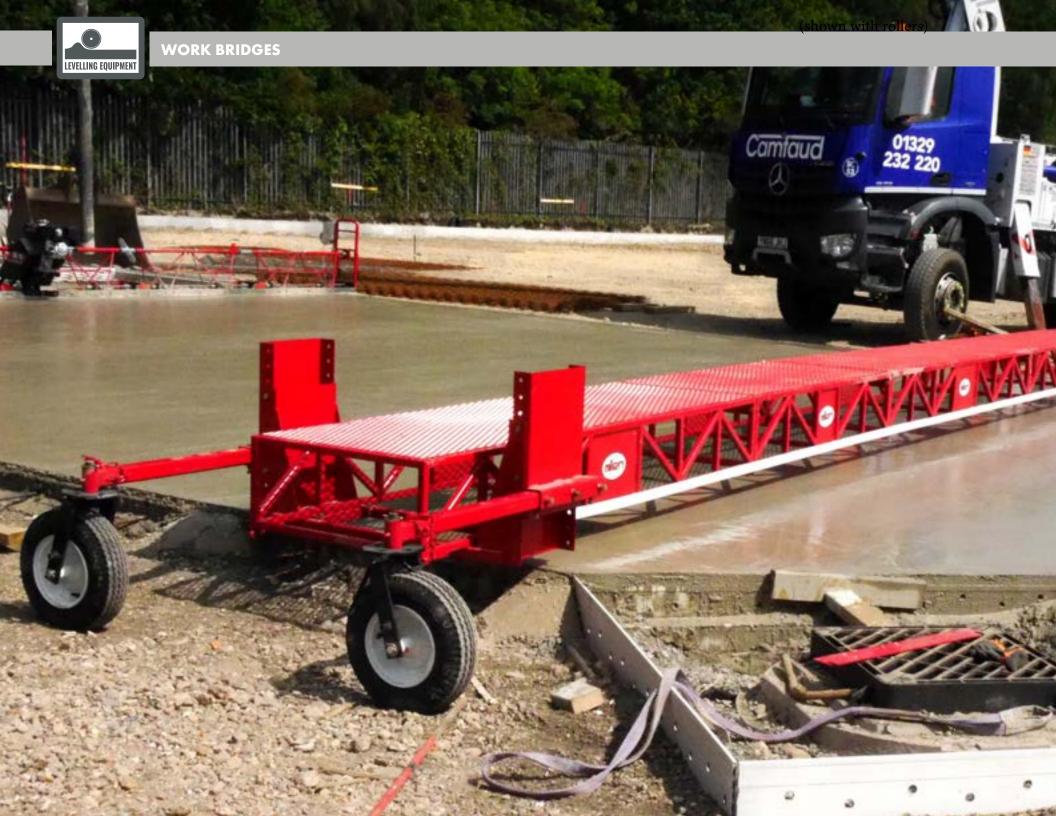

WORK BRIDGES



Work Bridges

Allen work bridges can be customised for every slab application. These units are ideal for joint work, applying curing compounds, bull-floating, texturing the surface and laying burlap and many other jobs that can be performed from the work bridge. The Allen Work Bridges are an economical workhorse for any job-site.



WB1224

The WB1224 Work Bridge work deck can extend to a maximum Of 16 meters. This unit is typically used in concrete pours which require texturing and chemical agents adding in consistent measure. Sections can be added (see table below) to allow the perfect bridge length for your project. The unit can be equipped with cupped wheels or rubber tyres depending on the project needs. Typical uses: texturing, curing, bull floating and laying burlap.

DESCRIPTION	WB1224
FRAME DIMENSIONS (D X W)	12 X 24 in (30.5 X 61 cm)
MAX WORK BRIDGE LENGTH	52.5 ft (16 m)
AVAILABLE SECTIONS	2 ft, (0.61 m)
	5 ft (1.52 m)
	7 ft (2.28 m)







WB1824

The 1824 Work Bridge can be extended out to 90 feet and is a great support product typically used in a bridge deck application, but it can also be used for roadway and airport paving. Like the 1224 Work Bridge, the unit can be equipped with cupped wheels or rubber tyres depending on the project needs and fitted with a power unit for easy mobillasation on any project surface. Typi cal uses: texturing, curing, bull-floating and laying burlap.





WB2434

The 2434 Work Bridge is the largest size work deck Allen produces, extending to 120 feet, and with the use of a cable tensioning kit, it provides a very rigid working surface. This work bridge is typically used in bridge deck applications. The unit can be powered and has many wheel options depending on the project needs, even an all-wheel drive option.



DESCRIPTION	WB2434
FRAME DIMENSIONS (D X W)	24 X 34 in (61x 86.3cm)
MAX WORK BRIDGE LENGTH	120 ft (36.5 m)
AVAILABLE SECTIONS	3 ft, (0.91 m) 6 ft (1.83 m) 12 ft (3.66 m)
TELESCOPIC SECTIONS	15 x 25 ft (4.57 - 7.62 m)

Powered Bridges

Both the WB2434 and the W1824 Bridges can be powered by an A 9.5 HP Kohler Gas Engine which powers the hydraulic drive bogies to help move the work bridge and eliminate the need for extra labor to push the work bridges..

DESCRIPTION	POWERED KIT AVAILABLE FOR WB1824 / WB2434
ENGINE	KOHLER CH365
HORSEPOWER CLASS	9.5 hp (7.08 kW)
FUEL TYPE	Petrol



SPEED-TENTS



Speed-Tents

Speed-tents offer concrete surface protection from rain damage and early curing on hot summer days. The surface protection created by this system means that no risks are taken, which could result in reinstatement costs due to the concrete coming in contact with the elements.

This system is used by professional practitioners to ensure concrete projects in the open are completed on time, on budget.



Standard Tent Size

Nom	ninal Tent Size:		To Cover Bay	Size (approx):
Stock Code	Length	Width	Length	Width
TENT4.5 TENT5.5 TENT6.0 TENT7.0 TENT9.0	4.5 meters5.5 meters6.0 meters7.0 meters9.0 meters	6.0 meters 7.0 meters 4.5 meters 9.0 meters 7.0 meters	4.0 meters 5.0 meters 5.5 meters 6.5 meters 8.5 meters	5.0 meters 6.0 meters 3.5 meters 8.0 meters 6.0 meters


Overlap Tent Size


Nominal Tent Size:		To Cover Bay Size (approx):		
Stock Code	Length	Width	Length	Width
TENTO4.5 TENTO5.5 TENTO6.0 TENTO7.0 TENTO9.0	4.5 meters5.5 meters6.0 meters7.0 meters9.0 meters	6.5 meters 7.5 meters 5.0 meters 9.5 meters 7.5 meters	4.0 meters 5.0 meters 5.5 meters 6.5 meters 8.5 meters	5.2 meters 6.2 meters 3.7 meters 8.2 meters 6.2 meters



Standard and Overlap Tents explained

When the area you require to protect requires multiple tents, it is important to choose a combination of Standard and Overlap tents to ensure gaps do not occur which is critical in ensuring that the elements do not damage your concrete.





If you are using more than one tent, the correct combination of overlap tents and standard tents will ensure no rain or heat will come in contact with the concrete. If you are using more than one tent an incorrect usage would be to position standard size tents side-by-side. This incorrect approach will put the protection of the concrete at risk from the elements.



Twin Pump Hose Skid Set



The twin pump hose skid set provides a great system to help move and slide flexible concrete pump hose over rebar during concrete pours. Includes a steel 'T' Bar handle to help pull the skids around the work area.

> After the pour the two skids slot together and are easily stored.





Concrete Pump Hose Disc

The concrete pump hose disc is designed to aid moving heavy concrete pump flex hoses around the work area and is used to protect expensive hoses from being damaged.

Simply click a T-Bar or attach a rope to pull the disc over the surface of the concrete for easy maneuverability.

This product helps to avoid worker back strain and heavy lift injuries.

Manufactured from steel to provide for many years of prolonged usage.





Stock Code: GNS240

T Bar Handle Pump Skid

This T-Bar connects via a Dog-Clip on a two link chain to a Pump Hose Skid Disc to make it easy to position pump hoses on the rebar when pouring concrete.

This back saving tool is manufactured from steel and coated in Black to provide many years of prolonged usage.

Stock Code: PDT



Rebar Wire Tie Tool

The Rebar Wire Tie Tool quickly and easily fasten's double loop wire ties to assist with fastening rebar effciently at the jobsite.

Stock Code: BTT



Dowel Bars

A dowel is a cylindrical steel rod. These dowels are designed to be cast into concrete to improve strength. They are placed over joins in concrete slabs in

order to prevent cracking.

Code	Dimensions
DB20/400	20 X 400mm
DB12/900	12 x 900mm
DB20/600	20 x 600mm
DB16/400	16 x 400mm

SURFACE MEASUREMENT TOOLS




Surface Deformation Measurement

A straight edge used to determine lateral surface regularity of a road or floor surface. A lightweight straight edge supported at each end with an aluminium block, giving a set height between the concrete surface and straight edge.

Using the straight edge allows you to measure any verticle irregularity using an optional 2.5mm incremented wedge (see Metric Calibrated Measurement Wedge below) with a range of 12.5mm low to a 12.5mm high.

Metric Calibrated Measurement Wedge



This is the tool used to take the measurment between the concrete surface and the straight edge.



Stock Code: CC495

Rub Bricks

Rub bricks are fade of fluted silicon carbide which makes the durable and strong. These tools finish concrete surfaces auickly and with amazing accuracy, making the life of the construction professional much easier.


20 Grit

Round Rub Brick



Sraight Edge with Support Blocks

Available in two widths, use these straight edges with the Metric Calibrated Measurement Wedge. It is easy to check for irregularities when combining these tools, as it provides the operator with a visual indicator of the evenness of any slab.



These Straight Edge tools come with built in loop handles for ease of carrying and two built in spirit levels.



The 3m straightedge was superseded by a new 2m straight edge and is the method is adopted in the current BS 8204, BS EN 13670 execution of concrete structures, the National Structural Concrete Specification and National Building Specification.

Rub Bricks Rectangular Rub Bricks.

	Size/Description	Code
	200 x 90 x 35mm Grit 20	CF268
)	150 x 75 x 25mm Grit 20	CF283
	150 x 75 x 25mm Grit 60	CF282



This Pro Combo Kit includes: 48" precision milled cast aluminium level, a level case made from durable high impact polstyrene that protects the level from typical knocks and a 9" aluminium torpedo level that features 3 vials for auick reference.

Professional Walnut/Maple Laminated Levels



Sands walnut & maple levels teature premium grade walnut/maple, double strength glass lenses and stainless steel bindings with wrap around end caps for protection.

Code	Description
SLWML48 SLWML24	48" Walnut/Maple Level
3LVV/VILZ4	28" Walnut/Maple Level

48" Brass Mahogany Level Stock Code: SI 12AB48



Mahogany wood provides the foundation for this 48 in. Angle bound brass bindings are embedded in the wood for extra strength and straightness. Six Cat's Eye Yellow double bent vials are solid set for accuracy.

Magnetic Stainless Steel Level

The Sands professional digital levels stores measurements and helps the user find exact angles, percentages, and pitches. Featuring a magnetic edge the level can attach to metal frames.



Stock Code: SLD1G48



Bulldog Shovels

Bulldog Shovels are forged from solid metal into one piece of steel to give maximum strength.



ldog

Stock Code: 5TM2AM **Size:** No.2. **Blade:** 310 x 250mm (12 x 10in).

A heavy-duty all steel taper mouth contractors shovel. Solid forged blade and socket correctly tempered for strength. It has a metal YD handle with wooden cross dowel.



Stock Code: 5SM2AM Size: No.2. Blade: 310 x 250mm (12 x 10in).

> A heavy-duty, all steel square mouth contractors shovel. Solid forged blade and socket correctly tempered for strength. It has a metal YD handle with wooden cross piece.

5 Gallon Plastic Bucket



Durable 90 mil 5 gallon bucket is great for a variety of uses such as mixing or moving various materials. Reinforcement rings on the top of the bucket prevent distortion when carrying heavy material. Constructed from translucent material makes measuring easy. The sides feature marking for liters, quarts, and gallons. Strong handle for easy transport.

Stock Code: GG468

5 Gallon Plastic Bucket

The Standard Bucket is a general purpose bucket great for use around the home, garden, etc. The bucket has a capacity of 3gal and has strong metal handles and plastic grip which makes it easy and more comfortable to carry.



Gorilla Tubs are flexible, which is the key to the many jobs they can perform. We supply a range of sizes which are great for mixing small batches of plaster and mortar; if the mix dries, a few kicks to the flexible body will remove the muck easily.



Stock Code	Description
SP14Y	14Ltr Tub
SP26Y	26Ltr Tub
SP42Y	42Ltr Tub
TC75Y	75Ltr Tub





Stock Code: PRM.Y

RED Gorilla Shovel

Stock Code: 119/1PPY

Get more efficiency with your scoops with the Gorilla Shovel™, a single-piece plastic shovel made from durable polypropylene. This Non-Sparking shovel is strong and lightweight at 1.2kg, making shifting and lifting an effortless job. The shovels ergonomic D-Handle is designed to reduce back pain. Made from UV and frost resistant plastic, the shovel is built to last.

STAKE PULLERS



Form Stakes

If you are working on a large concrete surface stakes are used to ensure your form remains in the correct position for your concrete pour allowing the concrete to set in the right shape.

Code	Length	Diameter
R22/300	300mm	4 inches
R22/600	600mm	6 inches
R22/900	900mm	6 inches

Stake Striker

The Striker drives form stakes and formwork pins safely and effectively. It helps keep operators hands away from the impact area and helps prevent mushrooming of form stakes.

Product Name	Code
Form Stake Striker	R100



The Big Ron Stake Extractor

The Big Ron Stake Puller is designed to be lightweight and portable but still pull the toughest of pins and stakes.

The jaws lock onto the side of the pin and a depress of the handle is all it takes to budge the pin. It works simply and effectively.

Product Name Cod

Big Ron's BR/EXT Stake Extractor



Jackjaw 313 Load Cell Stake Extractor

The JackJaw® Tent Stake Extractor Certified Load Cell option allows tent rental companies to directly measure the holding force of test stakes that were located around their job site. Incorporated into the JackJaw® stake puller is a proven and tested electronic load cell which directly measures the pulling force that is required to pull the stake, and records the peak force on the digital readout.

Code: JJ0313

Jackjaw Stake Extractors

JackJaw stake extractors pull stakes straight up out of the ground without bending them or breaking the fresh concrete, even when the stake is flush with the top of the form. Available in two sizes.

- Fast and easy to pull stakes out
- Pulls straight out without bending the stake
- Removes stakes with the standard 16mm and 20mm diameter
- Made from steel with zinc plating

Product Name

Jackjaw Standard Stake Extractor JJ0100 Jackjaw Extended Stake Extractor JJ0200





HEATED BLANKETS / FROST BLANKETS

Concrete Curing Blankets



Speedcrete supply a size range of heated concrete curing blankets designed for curing concrete in cold and adverse weather conditions. Cold weather slows down concrete cure time and can significantly hold up construction projects. Powerblanket cures concrete 2.8 times faster than a typical insulated blanket or tarp and properly maintains moisture throughout the hydrating process.

All of our curing blankets come as an insulated, water-resistant design. ETL certified to UL, CSA, and CE safety standards.



Available in a range of sizes

Product Code	Heated Dimensions	Finished Dimensions	Heated Area	Plug Type	AC Voltage	Nominal Power	Nominal Amperage	Approximate Weight/ Mass
MD1010	10' x 10' / 3.0m x 3.0m	12′ x 12′ / 3.6m x 3.6m	100 sq ft / 9.3 sq m	16 AMP Plug	110V	1440W	12A	50 lbs / 23 kg
MD0520	5′ x 20′ / 1.52m x 6.1m	6′ x 21′ / 1.83m x 6.4m	100 sq ft / 9.3 sq m	16 AMP Plug	110V	1440W	12A	50 lbs / 23 kg
MD0510	5′ x 10′ / 1.52m x 3.0m	6′ x 11′ / 1.83m x 3.4m	50 sq ft / 4.6 sq m	16 AMP Plug	110V	720W	6A	25 lbs / 11 kg
MD0320	3′ x 20′ / 0.91m x 6.1m	4′ x 21′ / 1.22m x 6.4m	60 sq ft / 5.6 sq m	16 AMP Plug	110V	960W	8A	30 lbs / 14 kg
MD0310	3′ x 10′ / 0.91m x 3.0m	4′ x 11′ / 1.22m x 3.4m	30 sq ft / 2.8 sq m	16 AMP Plug	110V	480W	4A	15 lbs / 7 kg
MD0304	3′ x 4′ / 0.91m x 1.22m	4′ x 5′ / 1.22m x 1.52m	12 sq ft / 1.11 sq m	16 AMP Plug	110V	240W	2A	6 lbs / 3 kg



FASTER

Cure concrete 2.8 times faster than conventional, insulated blankets

Curing progress	after	72	hou
With Power Blanket			

100%

Without Power Blanket



Jrs







Easily installed and removed and works on both steel and poly drums.



MAINTAIN MOISTURE

Produce cold weather concreting strength of 3,925 psi in 72 hours.



MAINTAIN IDEAL

TEMPERATURE

Keep bulk materials

at safe, workable

temperatures wherever

you are.



3,925 PSI **STRENGTH**

Produce cold weather concreting strength of 3,925 psi in 72 hours.

CONCRETE TENTS



Heavy Duty Curing / Frost Blankets

Our new Heavy Duty Frost / Curing Blankets offer a manageable and realistic method for curing concrete in cold and adverse weather conditions. With cold weather slowing down concrete cure times and significantly holding up construction projects these curing blankets have become a popular solution.

A reinforced PVC cover protects the insulated core providing a blanket that is durable and heavy, this allows the Curing Blanket to remain flat ensuring the slab is properly protected.

Dual sided

The cover is dual sided to draw heat in the winter and reflect heat during the summer. This offers great all-year-round value.

Easy to hold in position

Featuring brass eyelets at 1 metre intervals around the border which allows the curing blankets to be secured in high winds.

Quick curing times

This curing blanket cures concrete 2.8 times faster than a typical insulated blanket or tarp and properly maintains moisture throughout the hydrating process.



Speedcrete also supply 275-gallon DEF storage heaters come in two different thermal rating classes: Check out our chemicals section of the catalogue for more details.







Cold weather side.



Hot weather side.

Concrete Frost Blankets



Frost blankets are used to protect concrete slabs in their early stages against freezing temperatures and can also be used in summer to prevent excessive heat or wind moisture.

This material comes on an easy to cut roll with has a length of 75 meters and a width of 1.2 meters is 7.5mm and consists of a closed cell polyethylene.



Easy Storage.

Code: FRPVC63 Dimensions: Length, 6 metres. Width, 3 metres. U-Value 1.16 W/m2K



HEATED BLANKETS / FROST BLANKETS

THE BIG BLUE IS THE MOST POPULAR FLOAT IN THE UK

FLOATS



The Big blue Float

Big blue concrete trowel, available in a range of sizes. This carbon steel float to provides a super smooth concrete finish and has been a firm favourite with concrete professionals for well over a decade.

The Big Blue can be purchased in a range of sizes and Speedcrete offer kit combinations to suit your needs these kits include items that attach to the float such as the Heavy-duty Knucklehead II tilt action gear box and 3 x 6ft Aluminium Snap Handles.









Big blue Blade Sizes

Stock Code	Length	Width
704411	2.0 ft	1 ft
704412	3.0 ft	1 ft
704413	4.5 ft	1 ft
704414	5.0 ft	1 ft
704415	6.0 ft	1 ft
704416	8.0 ft	1 ft

Accessories

- Knucklehead II Tilt-Action Gearbox
- Aluminium Snap Handles

It is important that ordering this blade to have a knucklehead II Tilt-action Gearbox and some Snap Handles to push the float out on the concrete. This Gear Box attaches to the Big Blue and allows your Snap handles to be connected.

Aluminium Snap Handles

Stock Code	Length	Diameter
CC336B	6.0 ft	35mm
700524	6.0 ft	45mm
CC293SR	8.0 ft	45mm
CC291 SR	10.0 ft	45mm



Orange Thunder Floats

Introducing the Orange Thunder Float which has a unique high performing engineered material, developed for the concrete finisher. The KO-20[™] material was formulated as a tougher, lighter, and longer-wearing alternative to aluminium canvas-resin, magnesium, steel, and wood. The key factors studied in the innovation of this special material were abrasion, blunt impact, friction and repetitive wear applications.

K0-20[™] material works rough surfaces with un-encumbered motion and moves at a fast pace, bringing bleed water up faster and leaving the concrete open for a longer period. The machine beveled broken-in round edges prevent gouging and concrete doesn't stick to surface making it easy to clean-up after use.

Orange Thunder Bullfloat Blade Sizes

Choose from three lengths, all Orange Thunder Floats can be used with 2 or 4 hole tilt brackets, sold separately.

Code	Dimentions
CC2020RE	3ft (36″ x 8″)
CC2021RE	4ft (48″ x 8″)
CC2022RE	5ft (60″ x 8″)



Orange Thunder Hand-Floats

The Orange Thunder hand floats blade won't absorb liquids which prevents corrosion and rust. The hand float is reinforced with an aluminum bar to mount the patented ProForm soft grip handle, this handle has a texture ribbing which provides a great grip even when wet.



The Orange Thunder works differently to metal floats which lock the surface and trap the water. The Orange Thunder opens up the surface to allow water to evaporate





MAGNESIUM FLOATS



Magnesium Floats

Level and smooth a large area of concrete before finishing with the heavy-duty yet lightweight range of Bullfloats. These floats are painted to protect the blade and are multi-ribbed for extra strength.Choose from three lengths of Round End Floats and one Square End available in 4ft.

Magnesium Floats - Round End

Powder coated blades allow for easy clean up after a hard days finishing! Multi- ribbed top provides extra strength. The blades are properly curved and balanced to prevent digging.

Code	Dimentions
CC736-01	3ft (36″ × 8″)
CC803-01	4ft (48″ x 8″)
CC804-01	5ft (60″ × 8″)

Magnesium Floats - Square End


The square ends allow the user to finish along forms and into corners for complete coverage.

Code	Dimentions
CC801-01	4ft (48″ x 8″)

8" Square End Magnesium Bull Float Blade

This small square Float Blade is used to get into tight areas and is a useful tool for areas close to walls.

Code	Dimentions
CC803-01	8″ × 8″



Made from Lightweight Genuine Extru-Lite™ Magnesium which is 30% lighter than aluminium.

Embeds aggregate as it brings paste and bleed water to the surface.



Compatible with the Knucklehead Gear Box.

Product Code: CC1001

Magnesium Bull Float kit

Purchase the EZY-Tote Tool Carrier[™] with 4ft (48") Round End Bull Float, Knucklehead Gear Box Tilt-action Bracket, and (4x) 6 Ft. 1-3/4" Button Handles. **Product Code:** CC1011

The Ezy Tote Tool Carrier can be purchased seperately.



SPECIALIST FLOATS

Plexiglas Floats

Plexiglas concrete floats are available in 3ft or 4ft lengths as single blades or with a blade plus a knucklehead Gear-box. These floats are made from a material that is suitable for floating **Air-entrained concrete** and micro silica.

Float Blade Only

Code	Dimensions
790399A	3ft (36" x 7.8")
790400A	4ft (48" x 7.8")

Float Blade and Knucklehead

Code	Dimensions
790399	3ft (36" x 7.8")
790400	4ft (48" x 7.8")





What is Air-entrained Conrete?

The expansion of water as it freezes in concrete can create enough pressure to rupture the concrete. However, entrained air bubbles serve as reservoirs for the expanded water, thereby relieving expansion pressure and preventing concrete damage.

The primary benefit of entrained air in hardened concrete however is the resistance it offers to freeze-thaw damage and scaling caused by de-icing salts or chemicals. Most concrete contains some moisture which expands during freezing temperatures. Without room for this expansion, large forces develop that can rupture the surface causing what is commonly called surface scaling. The small, entrained air bubbles serve as reservoirs or expansion chambers to relieve these pressures.

Mahogany Floats

These wooden (mahogany) bullfloats are used to level concrete which requires a matt non-slip finish. When compared to brush finished textured surfaces the matt finish is much easier concrete surface to clean. Available in two sizes: 3ft and 4ft. Blades can be purchase seperately or with a knucklehead tilt-action gear-box.

Float Blade and Knucklehead

Float Blade Only

Code	Dimensions	Code	Dimensions
704723	3ft (36″ x 7.8″)	704722	3ft (36″ x 7.8″)
704725	4ft (48″ x 7.8″)	704724	4ft (48" x 7.8")





MAGNESIUM FLOATS



Channel Radius Floats

Used on high tolerance floors, these Channel Radius Floats are made from Extru-light magnesium and have rounded edges to reduce lapmarks. These dual edge floats have a rounded front edge for floating and a square 90° back edge for cutting.

Channel Radius Floats With Knucklehead			Channel Radius Floats Blade Only		
Stock Code	Length	Width	Stock Code	Length	W
700571	4.6 ft	6 in	790270	4.6 ft	
700572	5.6 ft	6 in	790271	5.6 ft	
700573	6.6 ft	6 in	790272	6.6 ft	
700575	8.6 ft	6 in	790282	8.6 ft	
700577	10.6 ft	6 in	790273	10.6 ft	

Outriggers sets for Channel Radius Floats

We recommend the use of outriggers on the 8.6ft and 10.6ft Channel Radius Floats or Bump Cutters.

Stock Code	Description
790277	Outriggers & Braces
790279	Clevis Pin & Yoke for attaching outriggers to float x2 required

Fresno Floats


This style of Fresno Float is particularly popular with Concrete Professionals who regularly add a textured finish to the slab.

The narrow 12.5cm width means the operator doesn't have to lift the snap handles as high as would be required on a wider float. The desired angle of the blade can be administered with much better control across a distance. The 3.5ft width Fresno Blades are perfect for mounting Speedcretes texture brooms when used with a Float Bracket Adapter and a Tilt-action Knuckhead Gear Box.

Carbon Steel Fresno Blades

Stock Code	Length	Width
CC832-01 CC833-01	3ft 3.5ft	5in 5in –
CC834-01	4ft	5in
CC835-01	5ft	5in

Blue Steel Fresno Blades



6 in 6 in 6 in 6 in 6 in



Fresno blades are made of steel and zinc coated.



A combination of five pieces of kit are required to produce the perfect fresno texturing tool seen in the image above.

See page for details



Aluminium snap handles


Aluminium snap handles for use with bullfloats, big blue trowels & walking hand tools. The 45mm snap handles are compatible with the Knucklehead tilt action gear-boxes, the 35mm diameter snap handles require an adapter.



Knucklehead Tilt-Action Gearbox

When floating on concrete, the one thing you really need is a decent float gearbox and the Heavy-duty knucklehead is quite simply the best of the best!





700524 CC293SR

CC291SR

Made of rugged lightweight aluminium, this Gear-box has a one to one turning ratio handle to control the pitch of the blade and has a Protected grease reservoir to ensure longer wear turning handle. This tool eliminates bending and lifting and is used with 45mm button handle aluminium Snap Handle Poles.

Product Code: 704383



Length 6ft, Diameter 45mm

Length 8ft, Diameter 45mm

Length 10ft, Diameter 45mm

Double Spring Button Clip

Replacement spring button clip for aluminium snap handles. Stock Code: CC289-01



Octagon Swaged snap handles

MARSHALLTOWN Octagon Handles are specially designed for increased grip strength by an average of 20% for superior performance and offers a comfortable, slip-resistant hold even with wet or sweaty hands. This concrete extension tool is available in two sizes: Swaged. Insert style handles are constructed from ribbed aluminum tubing and blue powder-coated to prevent oxidation from darkening your hands.

SWOCTO 138 Length 6ft, Diameter 35mm SWOCTO72 Length 6ft, Diameter 45mm



Multi Screw & Snap Handle Adapter

This versatile adapter has two screw widths and allows tools to be used from a distance via the ability to attach poles via a snap-adapter.



3/4″ Snap Handle Adapter

Available in both 35mm and 45mm diameter to suit you handles. This clevis style adapter is very useful for a number of concrete finishing tools.



Code	Description
CC332	32mm Snap Adapter
CC284	45mm Snap Adapter

3/4" Snap Handle Adapter

This Snap handle adapter has a 45mm Snap handle adapter at the wide end and 30mm snap handle adapter at the narrow end. Used for connecting tooling to alternative with connections.

> Stock Code: CC675

Diameter Button to Female Thread Adapter

This tool allows finishers to use threaded handles with button bull float bracket assemblies. Or combine a 1-3/4" diameter button bull float handle with a threaded handle.



Quick Change Converter Bracket

Turn your hand tool into a walking tool! Sturdy cast aluminum construction fits over wood handled hand tools to convert them into walking tools. Thumb screws on either end of the bracket secure the connection and keep the bracket in place. Fit the bracket on hand chamfer tools, curb tools, edgers, groovers, and step tools for versatility.

> Stock Code: CC495

Handle Insert for 1-3/4" Handle with Clips

The 8-1/2" insert fits snugly inside a 1-3/4" handle to connect handle to the bracket. The insert design of the handle provides a reinforced strength at t he connection point between handles and brackets.



Fixed & Swivel Action Trowel Brackets

Transform your concrete finishing trowel into a fresno with one of these brackets. Remove the standard handle from the shank and slide this bracket on in its place. The brackets fits snuggly on to most brands of flat trowels.







SPECIALIST FLOATS



Wood Mega Mover Concrete Placer 5ft

This 60" wooden placer handle with adapter hardware fits on the following items: 701109 Steel Texas Placer Blades, 701133 Aluminium Texas Placer Blades and on 701108 Aluminium rake blades. These blades are also available to purchase if required.

Stock Code: 704215



Pictured here is a Mega Mover attached to a Rake Blade.

12" Heavy Duty Hard Rustic Yard Brush

This heavy duty rustic tine yard brush is great for the cleanup and tidying of outdoors areas, vehicle yards and agricultural facilities.

12"/300mm width and 53"/1350mm Handle.

Stock Code: HYD





Clevis Handle 5ft

The Clevis Handle is used in conjunction with a variety of tools to groove, broom and finish the edges of your concrete bays. This sturdy and versatile handle is a firm favourite on job sites for Concrete Professionals.

Stock Code: CC386

Threaded Handle 5ft

Heavy duty PVC coated steel broom and squeegee handle. Can be used with various concrete tools and brackets which accept the threaded connections.

Stock Code: GG232











Bronze walking Groovers

Choose from our range of incredibly durable bronze groovers which will cut cleanly and smoothly, leaving sharp precise grooves in your finished concrete. An ideal tool for the professional who wants to see accuracy in their work.

These Bronze Groovers are supplied with a 5ft long wooden clevis handle.

Stock Code	Description
CC314	6 x 4½ x1″ Depth Bronze Groover
CC317	6 x 4½ x1½″ Depth Bronze Groover
CC278	8 x 8 x1" Depth Bronze Groover
CC279	8 x 8 x1½" Depth Bronze Groover

Slide Railer Bronze Groover

The unique design of this groover features raised sides to ensure accuracy in grooving as it follows along forms and straightedges. The bronze material makes clean up easy at the end of the day. This groover is easy to use for sidewalks, driveways, and other slab surfaces.

These Bronze Groovers are supplied with a 5ft long wooden clevis handle.

Stock Code	Description
CC314SR	6 x 4½ x 1″ Slide Railer Bronze Groover

Clevis to Button Handle Adapter

Expand the use of your tools with this adapter! All your concrete tools can use the same button bull float handle with this adapter.

Available in two diameter sizes. See below.

Stock Code	Description
CC332	35mm Clevis to Button Adapter
CC284	45mm Clevis to Button Adapter

Bronze Fresno Groover Attachment



into a groover! This bronze groover
attachment makes your fresno into a
long-handled groover by simply turning the
two thumbscrews.

Expand the use of your fresno by turning it

Stock Code	Description
CC623	½" Depth Groover Bit
CC625	¾" Depth Groover Bit

Bronze Bullfloat Groover Attachment

Expand the use of your Bullfloat by turning it into a groover! This bronze groover Fits on 8" wide bull floats.

Stock Code	Description	
CC940	19mm x 3mm (3/4″x1/8″)	10
CC941	25mm x3 mm (1"x1/8")	
CC942	38mm x 3mm (1 1/2"x1/8")	
CC943	50mm x 3mm (2″x1/8″)	



Quick Change Converter Bracket

This sturdy cast aluminium construction fits over handled hand tools to convert them into walking tools. Thumb screws on either end of the bracket secure the connection and keep the bracket in place.





SPECIALIST FLOATS



Belt polished surface for cutting clean smooth edges. Long wearing one-piece bronze with turned up edges. Easy to clean and comfortable to use. 'Saves your back'. Walking tools come complete with a 1500mm wooden handle or can be used with snap handle adaptor for use with bullfloat aluminium snap handles.

Stock Code	Description
CC302	9″ x 4″ 1/4″R Bronze Walking Edger

Curved Stainless Steel Edger

Elite Series™ Stainless Steel Curved Ends Cement Edger with Cork Handle


Stock Code	Description
CFE165KC	150 x 100 x 12mm (6″ x 4″ x ½″r)
CFE166KC	200 x 100 x 12mm (7.8" x 4" x ½"r)
CFE168KC	200 x 100 x 6mm (7.8" x 4" x ¼"r)

Stainless Steel Edger

Elite Series Five Star™ NY Stainless Steel Highway Edger with Cork Handle

(8.8″ x 4″ x ½″r) n (6″ x 4″ x ¼″r) n (6″ x 4″ x ¼″r)







18" Diameter Chamfer Tube Bronze Edger with Wood Handle

A unique long wearing one-piece casting won't wear out with extended use in concrete like steel tools. The blade is belt polished for cutting clean, smooth edges every time.

Stock Code	Description
CF384	18″ Bronze Chamfered Edger

This chamfer tool is designed for creating professional chamfered edges on round support piers. The 1/2'' radius edge extends down 1 ln. for proper coverage on the top of the cylinder. Curved sides create easy movements in a round fashion. The chamfer tools fits around 18 ln. diameter support columns. This durable tool has turned up edges to move through the cement without fear of gouging.

Gator Tools Hand Edger

Gatorloy blades are made from ultra-light and ultra-strong GatorLoy™, a unique aluminum alloy. The durable blade smooths and levels concrete before finishing. Use this float to open up the pores on the surface to allow for proper evaporation. The smooth sandblasted finish and broken-in edges create a float that is ready to use.

Stock Code	Description
GF 11470	7-1/2″x3″ SE GatorLoy™ Short Hand Float
GF 11471	9-1/2″x3″ SE GatorLoy™ Short Hand Float





Blue Steel Pool Trowels (Short Shank)

Blue steel pool trowels offer unparalleled flexibility and a superior finish for the professional. The rounded edges and shorter Shank gives greater trowel flexibility for improved finishing and operator control.



Size	Part No.
500 x 125mm (20″ x 5″)	CF295BPF
450 x 125mm (18" x 5")	CF292BPF
400 x 125mm (16" x 5")	CF280BPF
400 x 100mm (16″ x 4″)	CF279BPF
350 x 100mm (14″ x 4″)	CF277BPF
350 x 75mm (14″ x 3″)	CF272BPF
300 x 100mm (12″ x 4″)	CF275BPF
250 x 100mm (10" x 4")	CF274BPF

Blue Steel Pool Trowels (Long Shank)

Choose the trowel shape from our range of professional quality blue steel concrete trowels. These precision balanced and ready-to-use trowels are made from high quality blue spring steel which has the perfect amount of "give" allowing for a more flexible blade when finishing. Each blade is cross ground to just the right dimension for that perfect feel.

Choose from: Square Round, Square Square or Round Round.

Size	Square/ Round		Round/ Round
500 x 125mm (20" x 5")	T16	CF734BPF	CF740BPF
450 x 125mm (18" x 5")	CF343BPF	CF733BPF	T16
400 x 125mm (16" x 5")	CF233BPF	CF535BPF	CF742BPF
400 x 100mm (16" x 4")	CF285BPF	CF732BPF	CF737BPF
350 x 125mm (14" x 4")			T12
350 x 100mm (14" x 4")	CF284BPF	CF731BPF	CF736BPF
300 x 100mm (12" x 4")	CF214BPF	CF730BPF	CF721BPF
250 x 100mm (10" x 4")	CF213BPF	CF725BPF	T10
250 x 75mm (10" x 3")		CF726BPF	



Curved Fresno Trowel

This Curved Fresno blade is used on shotscrete and can be used on irregular surfaces such as skate parks.

Stock Code Description

CC914 Curved Fresno Blade Only 600mm

Trowel Sharpener

Keep your trowel in tip-top condition with this Trowel Sharpener. Ideal tool for eliminating small nicks and dull edges on your square or round end finish trowel.

> Stock Code: CF200

Float Hook

This Float Hook can be attached to your belt and is used by concrete professionals and brick layers to hold hand floats and other tools. These Float Hooks are a handy way of keeping the tools close by when both hands are needed.

> Stock Code: CF011



Elite Series Five Star™ Trowels

Broken-in and ready for use! Designed and engineered for the professional finisher. High quality carbon steel finishing trowel features a precision ground edge that is "broke-in" and ready for immediate use. Each trowel is made with state of the art machinery that grinds the blade to just the right dimension for that perfect feel. Greater flexibility and durability reduces fatigue when finishing concrete. The square blade finishes all the way to the corners to complete projects large and small.

Made from Carbon Steel

FINISHING TOOL

Size	Wooden Handle Square - Square	Leather Handle Square - Square
500 x 125mm (20" x 5")	CFE232	CFE232L
450 x 125mm (18" x 5")	CFE564	CFE564L
400 x 125mm (16" x 5")	CFE535	CFE535L
350 x 125mm (14" x 5")	CFE534	CFE534L
350 x 100mm (14" x 4")	CFE217	CFE217L
300 x 100mm (12" x 4")	CFE212	CFE212L

Elite Series Five Star™

XtremeFLEX[™] Stainless Steel Trowel with Cork Handle.



The new Elite SeriesTM XtremeFLEXTM finishing trowel is made of special premium stainless steel alloy to create the most flexible trowel available.

Size	Cork Handle Square - Square
500 x 125mm (20″ x 5″) 450 x 125mm (18″ x 5″)	PLE462K PLE463K
400 x 125mm (16" x 5")	PLE465K











Replacement Handles

All handles Fit the Elite Series™ flat trowels including concrete and plaster trowels. Handle locks into place on mounting for a guaranteed "No-Turn" connection.

Code	Description
CFE053K	Cork
CFE051LE	Wooden
CFE053G	Proform
CFE051L	Leather





Elite Series Five Star™ Golden Stainless Steel Trowel

Broken-in and ready for use! Designed and engineered for the professional finisher. Heat-treated golden stainless steel blade is made of a special alloy that will not rust, pit, or stain. The hardened steel holds its edge even after extended use.

Size	Wooden Handle Square - Square	Leather Handle Square - Square
500 x 125mm (20″ x 5″)	CFE549	
450 x 125mm (18" x 5")	CFE548	
350 x 125mm (14" x 5")	CFE543	
350 x 100mm (14" x 4")	CFE541	CFE541L
280 x 114mm (11" x 4.5")	PLE454	PLE454L

MAGNESIUM FLOATS



Heavy Duty Polyurpthane Float Emir



This Lightweight float withstands heavy-duty usage and is used by concrete and plastering professionals. This hard wearing hand float is more commonly known as the Emir Float.

Size	Code
280 x 110mm	U71
350 x 150mm	U72

Californian Mahogany Wood Float

This premium-grade item is a very high-quality concrete finishing product, suitable for experienced concrete professionals.



Size	Code
12 x 3″ 300 x 75mm	HC160
14 x 3″ 350 x 75mm	HC161
16 x 3″ 400 x 75mm	HC162
18 x 3″ 450 x 75mm	HC162

Canadian Redwood Float

Manufactured from Canadian redwood, this hand float is lightweight, easy to carry and won't exert too much strain on the user, despite its hardwood toughness and strength.



Size	Code
12 x 4″ 300 x 100mm	CF251
15 x 4″ 350 x 150mm	CF252

Magnesium Hand Trowel

These Kraft Tools hand trowels are lightweight and durable. Manufactured in magnesium these popular trowels have a comfortable





Square End Float		Round End Float	
Size	Code	Size	Code
500 x 75mm	CF020PF	500 x 75mm	CF020PF
450 x 75mm	CF018PF	450 x 75mm	CF018PF
400 x 75mm	CF016PF	400 x 75mm	CF016PF

check for Square rounds

Elite Series Magnesium Floats with Cork Handle

Kraft Tool's new Elite Series™ Mag Float features a distinct grind on the working surface that gives concrete a smooth professional look. Available with Square or round edges these floats are made from Genuine Extru-Lite™ Magnesium for a lightweight tool that minimises fatigue while creating a superb floating action.

Magnesium is 30% lighter than similar aluminum tools. The smooth magnesium blade opens up the pores on the surface to allow proper evaporation.

Round End Float with Cork Handle

Size	Code
400 x 80mm	CFE076K
450 x 80mm	CFE074K

Square End Float with Cork Handle

Size	Code
400 x 80mm	CFE016K
450 x 80mm	CFE018K





Slump Cone Testing

Slump test is the most common and simple test used to measure the workability of fresh concrete. This test is performed to check the workability or consistency of freshly mixed concrete in a specific batch.

Workability: Workability means how easily the concrete can be mixed, handled, transported, placed into position and compacted.













True Slump

The concrete mass after the test lies evenly spread without disintegration.





Types of Slump


Zero Slump Collapse Slump

For very stiff or dry


mixes that show little

or no slump after

When the sample is collapsed due to adding excessive water.



Shear Slump



Portable Slump Cone Test Kit

This portable slump cone test kit is particularly suitable for site inspectors as they are handy, easy transportable with a swivel handle and has housing for all the parts. The cone is manufactured from Stainless steel. The kit comes with a base, Slump cone and tamping rod.

Stock Code: PCT/SCS-C

Slump Cone Test Set Individual items


All the items in the Slump Cone Test Set can be ordered seperately.

Speedcrete offers every component you will need all in one kit, made from stainless steel, these items are durable and protected from corrosion.

A. Cone (Stock Code: CN010).

- B. Aliminium Scoop (Stock Code: MH525).
- C. Slump Cone Funnel (Stock Code: CN013).
- D. Base Plate (Stock Code: CN012).
- E. Slump Cone Tamp Bar (Stock Code: CN011).

slump Cone Test Set



Slump Cone Test Set

Speedcrete offers every component you will need all in one kit, made from stainless steel, these items are durable and protected from corrosion.

Stock Code: STK





CONCRETE TESTING



We supply a range of Steel or plastic Cube Moulds which are used to contain the concrete and create the cubes.

Steel Concrete Cube Mould / 4 piece

Concrete cube mould; A bolted steel test cube 100mm (4") or 150mm (6") square that can be filled with concrete product on site allowed to cure then dismantled, the moulded product can then be either Lab tested or kept in storage for quality control purposes.





Cast Iron Concrete Test Mould

These calibrated cast iron cube moulds come with a certificate to guarantee that each mould has accurately machined as standards require. These Moulds should be capable of withstanding heavy usage without suffering distortion. It is important that these tolerances can be maintained to ensure consistent test results.







Plaster Cube Moulds

The Qube[™] plastic concrete test mould has a revolutionary design that caters for rapid debonding and multiple reuse. Lightweight, cost effective and economical, this cube mould complies to EN-12390-1 standards.

Code	Description
Q100-1	Qube 100mm Test Mould
Q100-6	Qube 100mm Test Mould (6pk)
Q150-1	Qube 150mm Test Mould
Q150-6	Qube 150mm Test Mould (6pk)

Three Gang Mortar Cube Moulds 50mm

Some clients stipulate that to conduct a comprehensive testing of the mortar 1 cube needs to be tested at 7 days and 2 cubes at 28 days which makes this 3 gang cube mould an essential piece of kit. This 3 gang mould proves that each cube belongs to the same batch.

Made from steel with machined internal surfaces, all mould dimensions and specifications comply with the related standards.

l	Code	Description
	65-L0080	50mm Steel Mortar Test Mould

Cube Mould Tamping Bar

The cube tamping bar produces concrete test cubes to measure compressive strength in accordance with BS EN 12390-2. To produce the test cubes the operator will need to strike the test sample 25 times for 100mm cubes and 35 times for 150mm cubes to remove air and create the sample.







Curing Tanks

We supply curing tanks which are used as part of the testing process which ensures concrete meets its expected compressive strength. Manufactured in heavy duty Polypropylene and available for power supplies of 240V or 110V.

These concrete cube mould curing tanks are provided with Heater, Temperature Controller, Galvanised Cube Support Rack, Mains Lead and Plug.

The curing tanks will maintain the temperature of the water through a thermostatic controller at the required 20°C and are accurate to +/- 1°C. This allows for a far greater degree of accuracy than traditional methods.

240 Volt Concrete Curing Tanks

Choose from a 12 or 24 cube capacity tank. Tank capacity is based on the 150mm sized cubes.

Code	Description
A12-240V	12 Cube 240V Curing Tank
B24-240V	24 Cube 240V Curing Tank

110 Volt Concrete Curing Tanks

Choose from a 12 or 24 cube capacity tank. Tank capacity is based on the 150mm sized cubes.

Code	Description
A 12-110V	12 Cube 110V Curing Tank
B24-110V	24 Cube 110V Curing Tank

TDF data logger Thermometer

The ThermaData® TDF data logger incorporates an external NTC thermistor probe with a one metre PVC/PFA lead that measures over the range of -40 to 125 °C and can record up to 4000 readings. The ThermaData® logger TDF has a clear, easy to read LCD display and is housed in a waterproof, ergonomic case that is designed to meet IP66/67 protection.



Curing Tank Thermometer

The Curing Tank Thermometer allows you to visually see the temperature of the curing tank at a glance. It can record temperatures over the range of -49.9 to 69.9°C.

Stock Code:

296-101



Stock Code: TM-810-210

Digital Concrete Thermometer

Concrete Thermometer allows you to test the temperature of the concrete prior to pouring the concrete. Typically used during periods of very cold weather the concrete thermometer can help you to ensure that the temperature is above the recommended 3° celsius prior to placing.

Stock Code: 82-D1226



Galvanised Cube Support Rack ensures that the heating element does not become damaged by the heavy concrete cubes.

available for power supplies of 240V or 110V. We can also deliver a 230V if required









MAGNESIUM FLOATS



Professional Concrete Curing Tanks





Zinc plated curing tanks

heavy duty Thermo® plastic compound curing tanks

Our professional curing tanks are ideal for curing large quantities of test sample of concrete cube and cylinder moulds. The tanks are manufactured in sheet steel and zinc plated or in heavy duty thermo plastic to prevent deposits and build up.

The tank comes supplied with a base rack and a thermo regulator controller as standard that will maintain tank temperature to 20°C as required. A upper racks can be added as required (max 8) to this curing tank to allow for a huge 128 150mm cube mould capacity if so required.

Model: Zinc Pro1000 Ltr Tank Power: 230 Volt Outside Dimensions: 1550 x 805 x 820mm Weight: 110 Kgs Max Capacity: 128 Cubes (with 8 Upper racks)

Code	Description
PCT/1000L/TH	Professional Zinc Curing Tank
PCT/UPR/ZC	Upper Rack For Zinc Pro Tank
PCT/SUBP/60	Submersible Circulator Pump
PCT/C191/10	Thermostat For Zinc Pro Tank

Model: Thermo® Plastic 650 Ltr Tank Power: 230 Volt Outside Dimensions: 1200 x 800 x 850mm Weight: 30 Kgs Max Capacity: 54 150mm cubes

Code	Description
PCT/650L/TH PCT/650L/DH PCT/SUBP/60 PCT/POLCV	Thermo Tank Thermo Heating Thermo Tank Digital Heating Submersible Circulator Pump Poly Pro Tank Cover

Vibrating Tables

Applying proper vibration is the ideal way to prevent common problems found in concrete elements, such as bugholes, honeycombing, and cold joints. Vibratory Tables speed up production and eliminate the safety issues experienced when employees are exposed to the lifting and moving of internal and external vibrators. Testing the quality of a concrete surface is very important to the construction

professional who wants to make sure they complete a job that is accurate, neat and top quality.

Code	Description	Dimensions
55-CO159H/Z	110v Vibrating Table	600 x 400mm
55-CO159/H	230v Vibrating Table	600 x 400mm
55-CO160H/Z	110v Vibrating Table	800 x 800mm
55-CO160/H	230v Vibrating Table	800 x 800mm

Concrete Testing Hammer

The Non-destructive concrete test hammer is used to evaluate the surface hardness of hardened concrete in order to evaluate the strength in various parts of the structure. With a impact energy of 2.207 Nm and a measurement range of 10 to 70 N/mm2 this product comes complete with a carry case, grinding stone and instruction manual.

Stock Code: 58-C0181/C



SPECIALIST FLOATS

8" Roller Tamp with 1-3/8" Diameter Button Adapter

This small 8" (203mm) roller tamp prepares the surface of a slab for a smoother finish.



The roller depresses the aggregate and brings the fat to the surface of a slab in a uniform fashion. The small length of the tamp is great for small areas, steps, and hard-to-reach areas near buildings and walls.

Stock Code: CC946





Choice of: 24", 36" & 48" widths

These double roller tamps prepare the surface of a slab for a smoother finish. The two rollers depress the aggregate and brings the fat to the surface of a slab in a uniform fashion. Each 5" diameter roller has a special roller tamp screen to optimize the work.

Using this tamp will level the slab in half the time and does a better job than other conventional tampers. The tamper can also be used to create a non-skid surface when rolled over for a final finish.

Code
RG24
RG36
CC958B

All Double Roller Tamp come with a 45mm Snap Handle Adapter.

24" Safety Roller with 1-3/4" Diameter Thread Adapter

Gives rough skid resistant finish to concrete ramps. Roller is 5" in diameter and 24" (609mm) wide.



Stock Code: RG24S

36" Single Roller Tamp with 1-3/4" Button Handle Bracket

This 36" (914mm) long The 5" diameter roller tamp prepares the surface of a slab for a smoother finish.



The roller depresses the aggregate and brings the fat to the surface of a slab in a uniform fashion. The tamper can also be used to create a non-skid surface when rolled over for a final finish. Use with a 1-3/4" button handle, sold separately.

Stock Code: RG36S

Indent Roller

High quality brass indent roller used for applying non-slip surface to concrete slab. Often referred as a spiked roller, the indent roller will leave a durable non slip surface of indented pyramids which will not scrub out.

SPECIFICATIONS

30cm width Weight: 15 Kgs Roller made from Brass

Stock Code: INDENT



MAGNESIUM FLOATS

The Hexagon Roller is

Stock Code: HEXROLLER

available to purchase on it's own.




Hexagon Roller Kit

The Hexagon Roller Kit is Ideal solution for creating a hexagon pattern in concrete which produces a durable non slip finish floor.

Typically used in livestock yards and agricultural settings this Lightweight roller can be weighted/filled with water for stiffer sections if required. This hexagonal texture roller allows cattle grip in all directions and also allows for the fast drainage of fluids. Features a roller stand to protect roller when not in use.



The Hex-Roller was designed to erganomically give cows the correct grip required to prevent slipping and subsequent injuries.



The Hex-Roller has can be filled with water to add the required weight for your imprint. This feature also allows the roller to be kept light-weight in transit.



Flip the frame to allow a free-standing position which allows the Hex-Roller to be cleaned with ease. A liquid release product is typically used for this purpose and can be found on the Speedcrete website.



Stock Code: CYR/RA

Kit Contents

The Hexagon Roller (the roller is 91 cm wide with a 23 cm diameter).


2 x aluminium snap adaptors (length 6ft, diameter 45mm). CC569 1/2 touch up wedge roller CC289-01 replacement clip for snap handle

LR05 Zyglide Liquid Release 5 litres











SPECIALIST FLOATS

Roller Grid 2

The Roller Grid 2 is mainly used to create a durable surface in yard environments and is particularly good at creating a non-slip surface in agricultural yards and livestock sheds



This 4ft wide roller creates a repeated square pattern in concrete which produces a durable non slip finish floor. The frame allows this piece of equipment to be easily cleaned after usage.



This Lightweight imprint roller has comes with an aluminium roller frame which has a snap adapter attached, this adapter allows the standard 45mm diameter snap handles which are predominately used for many floats by concrete professionals. The roller frame is designed to allow the roller to be easily cleaned after use by flipping the unit around so the roller does not make contact with the ground whilst jet-washed or brush cleaned.



There are many patterns available which Speedcrete can supply so feel free to enquire. The example finish below is Cobblestone.



The Rock N Roller stamping system allows contractors to roll impressions in concrete five times faster than traditional stamping methods.

NOTE: 14" and smaller rollers recommended for touch ups or boarders only. Not recommended for large jobs.

Texture Rollers

Used to create texture next to buildings or other hard to reach areas. All of these hand-held texture rollers have a feathered edge to allow for rolling in any direction while avoiding edge lines.

Touch Up Wheels

Used to touch up grout lines. These roller wheels are available in various widths and styles and can be attached to a push button adapter which will allow the tool to be attached to a pole.







MAGNESIUM FLOATS





Chameleon Range

Marion Brush Company has been making specialised brush products since 1954. From its conception the idea of combining speed, quality, and innovation has been an important core value. Speedcrete supply a range of Marion Brush and finishing tools defined as the Chameleon range.

Chameleon Trac II Rope Brush System

The Chameleon Trac II is the perfect solution when texturing concrete in confined areas where using long handles is not permitted. this approach allows you to finish concrete 50%-75% faster and is available in a range of 4, 6, and 8ft wide brushes.

This kit has three different textures with colour coded brush refills.


Converts easily from handle-less twin brush system to two individual brushes which can used with the Multi-Use Adapter and handles.


Comes with with the heavy duty aluminium carry case.

Code	Description
MBCT4KIT	4ft Concrete Rope Brush Kit
MBCT6KIT	6ft Concrete Rope Brush Kit
MBCT8KIT	8ft Concrete Rope Brush Kit

Top Tip

The Chameleon brushes are made from a material which has memory. If the bristles become bedraggled pour hot water across them and they will re-shape back correctly.

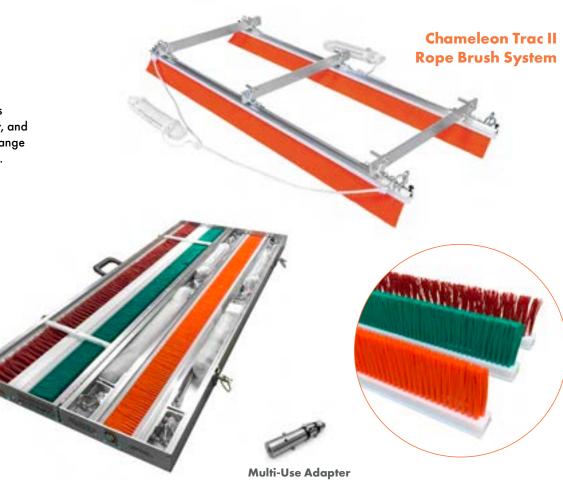



The brush strips can easily interchanged by sliding them off and sliding the brush texture



Chameleon Trac II M-Series Power Kit

This motorised system comes with our oft Trac II Kit which includes a carry case, three sets of brushes (black soft, orange medium, and green stiff), the M-Series Power Unit, 2-100' tracking ropes, a multi-use adapter, hardware, a battery, and a charger.

This unit is capable of finishing 10,000-12,000 square feet on a single charge. Standard 100' ropes are also included for traditional manual operation.

Additional batteries can be purchased separately.

Code	Description
MBCMS6-KIT	6ft Concrete Power Kit



Marion Single Brush Systems

The single Chameleon concrete texturing brushes come in widths of 4ft, 6ft, and 8ft With three #612 nylon resin colour coded texturing brushes to choose from: Orange - medium, Green - stiff and Red - hard.

This system comes with a multi-use adapter which can be used with snap on or 3/4'' threaded float handle connectors. This adapter slots into the adjustable push-pull angled design which uses the sides of the bristles, not the ends, to produce a superior brush finish.


Other features include our high density polyethylene block and our aluminum extruded channel, which not only makes this brush durable but allows you to swap out the bristles with any of our other 3 texturing options.

Code	Description
MBCT4S	4ft Single Brush System
MBCT6S	6ft Single Brush System
MBCT8S	8ft Single Brush System

To choose the texturing option add to the code: -O = medium texture. -G = stiff texture. -RT = hard texture. Example: MBCT4S-O will give you a 4ft Single Brush System with a medium texture brush finish.

Replacement Brush Strips

Brush strips can be purchased from our online store with 3 texturing options available in lengths of 4ft, 6ft, 8ft.

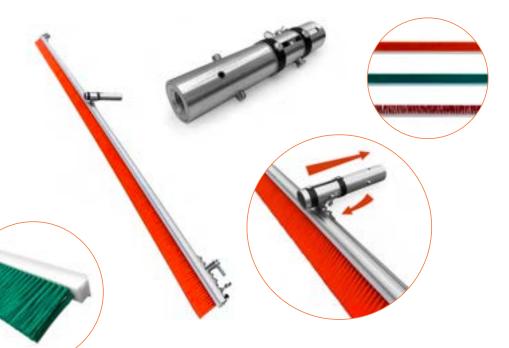







The Doubleboy Trac II System

A handleless Bull Float system that is pulled from side to side with ropes. The Doubleboy Trac II gives you an even and consistent floated surface no matter which way you pull it. No handle weight to affect the slab and our adjustable mechanism automatically tilts the head as you begin pulling.

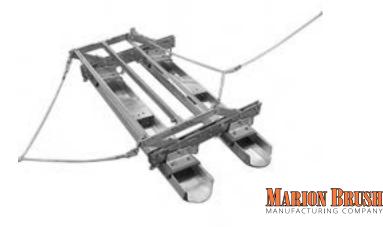

Especially effective in confined areas where handles are clumsy and awkward. Great for pours of 24 feet or more! Available in 4', 6', and 8' widths. Bullfrog Trac II comes with 1-50' 3/8" nylon rope set and is designed to be used on 6" wide Channel Radius floats.

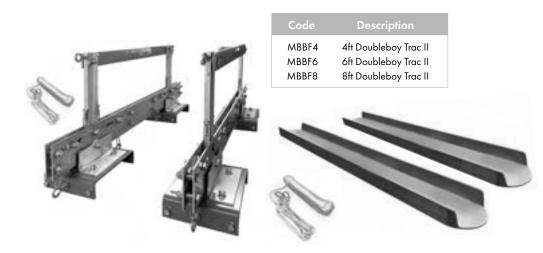

Polybristle Broomheads

These Polybristle Broomheads are used to add a textured brush finish to concrete surfaces. Available in a range of sizes and texture strengths, The 2 connection brackets allow the brush to be fitted to a Fresno adapter bracket or a clevis handle.



Soft Texture Polybristle Broomheads

Code	Description
SC380150	3ft Soft Polybristle Broomhead
SC380154	4ft Soft Polybristle Broomhead
SC380158	5ft Soft Polybristle Broomhead



Medium Texture Polybristle Broomheads

Code	Description
SC380151	3ft Medium Polybristle Broomhead
SC380155	4ft Medium Polybristle Broomhead
SC380159	5ft Medium Polybristle Broomhead



Hard Texture Polybristle Broomheads

Code	Description
SC380152	3ft Hard Polybristle Broomhead
SC380156	4ft Hard Polybristle Broomhead
SC380160	5ft Hard Polybristle Broomhead



These brushes are available as a polybristle strips which slide onto the broomheads seen above, visit: www.speedcrete.co.uk for more details.

(i)



Flat Wire Texture Broom

We supply two widths of flat wire texturing brooms: 36" and 48" with a gap size of 3/4'' or 5/8'' between the 5'' long wires. These concrete texturing brushes have an adjustable handle to allow for the correct pressure to be applied.



A popular tool to create non-skid surfaces on highways, bridges, airport runways, ramps, driveways, and cattle pens. The Flat Wire Texture Broom produces a uniform rough aroove surface on roads and bridges for maximum traction and to keep water flowing off the road.

190. 4
1 tago
A Y

Code	Description
CC198-3/4	48" Flat Wire Texture Broom 3/4 Spacing
CC196-3/4	36" Flat Wire Texture Broom 3/4 Spacing
CC196-5/8	36" Flat Wire Texture Broom 5/8 Spacing



Steel Brush 12 inch head

This 3" steel wire brush has a 12" wide wooden head and a screw-in wooden handle. Used as a deck scrubber this robust brush can be used for clearing flooring areas which require heavy application.

Stock Code: 330015



Steel Concrete Brooms

Primarily used for concrete texturing on motorways, airport aprons and taxiways. Available with a wooden handle with support brace. Alternatively they can be supplied with an adjustable wooden handle or snap handle adaptor.



Code	Description
330001	24" (2ft) Steel Texture Broom Fixed Handle
330002	36" (3ft) Steel Texture Broom Fixed Handle
330003	48" (4ft) Steel Texture Broom Fixed Handle
330004	24" (2ft) Steel Texture Broom Adjustable Handle
330005	36" (3ft) Steel Texture Broom Adjustable Handle
330006	48" (4ft) Steel Texture Broom Adjustable Handle

Steel Concrete Broomheads

Speedcrete supply Steel concrete texturing Broomheads in three widths.

	Code	Description
	330007	24″ (2ft) Steel Texture Broomhead
	330008	36" (3ft) Steel Texture Broomhead
	330009	48″ (4ft) Steel Texture Broomhead
ľ	1 × 1	

Wire Brush & Scrapper

Clean and prep industrial spaces with this sturdy tool. Stiff round wire bristles are made for tough jobs like removing paint. The 1 in. trim The brush head measures 8in. and extends out to create the handle.

Stock Code: BL466



Magnesium Tamp Beams

These Extru-Lite Magnesium Tamp Beams are ultra-lightweight - weighing up to 30 per cent less than other brands, this allows them to be transported easily. This tool does not compromise on strength and durability, with the metal alloy remaining straight and maintaining rigidity for far longer than other screeds, while their stiffness also works to eliminate sag.

Code	Description
SC410	10ft (3m) Tamping Beam
SC412	12ft (3.6m) Tamping Beam
SC419	16ft (4.9m) Tamping Beam
SC420	19.8ft (6m) Tamping Beam
SC424	24ft (7.3m) Tamping Beam
SC426	26ft (7.9m) Tamping Beam
SC428	28ft (8.5m) Tamping Beam





Hi-Tech Magnesium Screed Beams

The light weight magnesium screed beams with the unique extruded shape provide excellent strength and rigidity. The unique hour-glass shape has been designed to make gripping the beam easy and comfortable.

÷				
	T		61	
	1		9	
1		-	5	
		-	r	

Code	Description
HMS10	10ft (3m) Tamping Beam
HMS12	12ft (3.6m) Tamping Beam
HMS15	15ft (4.6m) Tamping Beam
HMS18	18ft (5.5m) Tamping Beam
HMS20	20ft (6m) Tamping Beam

Aluminium Tamp Beams

Speedcrete offer a range of Lightweight anodized 'GOLD' aluminium tamps which will ensure your concrete surfaces will have the desired finish.

iption
nping Beam
Imping Beam
Imping Beam
imping Beam
Imping Beam





Fixed Height Tamp Beam Handles

Tamp beam handles available to suit either tamp beam (box section or hi- tec). Complete with rubber grips.

Fixed height handles manufactured in aluminium.

Stock Code: 700175



Adjustable Height Tamp Beam Handles

Adjustable tamp beam handles have a simple locking device which allows the handles to be set to a preferred height. With comfortable rubber hand grips these handles are manufactured in steel for long lasting performance.

Stock Code: 700176-3



The two Adjustable Height Tamp Beam Handles come with x4 M8-70 Bolts which connect the handles to your pre-drilled Tamp Beam.

Saw Beam Handles

Saw beam handles are attachable to several of the tools we supply including magnesium tamp beams or hi-tech magnesium screed beams. Typically used to gain total control of tools used for extreme tolerance work.

Stock Code: 700174





SPECIALIST FLOATS



Jitterbug Concrete Tamp

Tampers (sometimes called Jitterbugs) push the coarse aggregate (in harsh mix concrete) in the concrete below the concrete surface and consolidate the concrete by helping to embed the aggregates down. Tamping should only be done on low slump concrete. With high slump concrete, the coarse aggregates sink naturally and tamping can cause segregation of the aggregates.

Stock Code: CC879

EZ Screed Tool Kit

The EZ Screed Tool. Use for quick accurate grading of work area when utilizing free vibration screed machines. The EZ Screed Improves accuracy and surface tolerance over traditional texas placers, and the ergonomic handle position allows you to really shift the concrete without causing repetitive strain to your back.

The kit comes with attachable 4ft 5ft & 7ft. rails constructed of 3/16th 6061 T6 aluminuim The steel handles have a comfortable textured rubber grip.

Stock Code: EZCS457





Magnesium Tri-level Placer

A lightweight, triangular Genuine Extru-Lite[™] Magnesium Blade allows the user to float, screed, and level concrete with one versatile placer. The 36 In. long blade is 30% lighter than similar aluminum tools.

Adjusting the height of the handle allows the user to engage the surface of tool for smoothing, or moving to engage the point of the triangle for checking flatness on slabs. Braces extend from the ends of the blade up the handle for support of the 3 Ft. long blade. A 60 In. strong wood handle completes the tool. Ships unassembled.

Code	Description
CC934	3ft (1m) Tri-level Placer
CC935	4ft (1.2m) Tri-level Placer

Magnesium Asphalt Rake

This 36" Genuine Extru-Lite™ Magnesium head is 30% lighter than aluminum. Heavy-duty, yet lightweight magnesium head features standard teeth on one side and a smooth edge on the other. The teeth help grade material. Braces extend from the ends of the blade up to the handle to provide additional support when moving and raking asphalt, gravel, and other materials. The blade fits on a lightweight anodized aluminium handle. The handle is anodized to protect the metal and prevent the user's hands from turning black from oxidation.

Code	Description
GG624	24″ (609mm) Magnesium Asphalt Rake
GG626	36″ (914mm) Magnesium Asphalt Rake
GG627	42″ (1066m) Magnesium Asphalt Rake

TOOL CC

RAFT





Dapple Bar Screed Set

Take a look at our Dapple Bar Screeding set which gives you three interchangable bar widths: 900mm, 1500mm & 2500mm.

Dapple Bars are used to remove trapped air pockets for a perfectly flat and smooth surface finish. Used mainly for a multitude of Liquid Screed types, the dapple bar is used to tamp the screed; once fairly vigorously to get any air bubbles out of the screed and a second time more gently without leaving the surface to get a smooth finish.

Stock Code: DBSS

Whiskey Stick

Our whiskey stick features a 60" Magnesium blade to level and place concrete fast. Rounded edges for floating and square edge for cutting and filling. Handle tilts to the right floating angle. Fitted with heavy duty braces and 72" snap button 1-3/8" extension handle.

Stock Code: CC425

Round Square

Aussie Combo Screed

This innovative tool can be used as a float, screed, or check rod when you want the perfect finish. With a choice of sizes (4ft, 6ft and 10ft) this combo hand screed is made from Genuine Extru-Lite™ Magnesium which forms the base of the tool. The 1-3/8″ wide bottom edge features a round edge for floating and a square edge for cutting. Magnesium is 30% lighter than aluminium straightedges.





Buckaroo Straightedge

With a round edge for floating and a square edge for cutting and trimming, this versatile and can be used on many projects, making this product great value for money. The smooth tapered handle includes a top reading level vial to ensure you are level.

Edge

Edge





Code	Description
CC421L	4ft (1.2m) Buckaroo
CC422L	6ft (1.8m) Buckaroo
CC428L	8ft (2.4m) Buckaroo
CC423L	10ft (3m) Buckaroo





Texas Placers (Lightweight)

Lightweight Texas placers are a great way to effectively place and grade large volumes of newly poured concrete with considerably less effort than compared with using conventional shovels and rakes. Choose the curved or right angle designs.

The gold rake features a slightly more curved head for levelling and grading the concrete. The 'right' angle blue model has a straighter blade which enables the face to be used for tamping with the handle in a vertical position.

Code	Description
700191A	Gold Texas Placer (Lightweight)
700191B	Blue Texas Placer (Lightweight)



 Code
 Description

 700184
 Steel Texas Placer (Heavy Duty)

 700190
 Aluminium Texas Placer (Lightweight)

€ TEXAS PLACERS



Heavy Duty Texas Placer/ Rake Parts

We supply the heavy duty Placer and Rake Blades as replacements, assembling these blades with the handle can be a cost saving way of purchasing the rake and placer of your choice.

Aluminium Placer Blade

Stock Code: 701109

Steel Placer Blade

Stock Code: 701109

Aluminium Rake Blade

Stock Code: 701108



Stock Code: 704215

Heavy Duty Concrete Rake




This Heavy Duty Concrete Rake featuring a toothed designed. Manufactured in heavy duty aluminium for rigidity and longevity. The rake head is designed so it is easy to manipulate the concrete allowing it to be placed easily on the slab.

156cm x 51 cm x 10cm - 1.44kgs supplied with wooden handle.

Dual Faced Concrete Rakes

Choose from Steel or Magnesium, this dual faced rake placer combo tools are made to give a ideal angle for raking and moving concrete into place. These rake/placers come with a 4.5ft long wooden handle.





Large Rubber Squeegees

In the concrete finishing industry squeegees can be used for removing bleed water from freshly poured concrete slabs or can be used to direct water or remove slurry as part of a concrete floor grinding process.

Code	Description
370250	3ft (900mm) Squeegee
370251	4ft (1200mm) Squeegee
370256	6ft (1800mm) Squeegee
370258	8ft (2400mm) Squeegee

All Squeegees come with a 5ft wooden Clevis handle as standard.

Straight or Curved Edge Squeegee

Choose from a Straight edge or curved edge Squeegee for removing bleed water from freshly poured concrete slabs or to direct water/slurry as part of a concrete floor grinding process. This product comes with a screw in 5ft handle which allows the tool to be efficiently stored in transit.


Code	Description
SC236	3ft (900mm) Straight Edge Squeegee
SC236C	3ft (900mm) Curved Edge Squeegee

Floor/Form Scrapers Metal Handle

These scrapers have flexible but robust steel blades and are used to remove heavy debris. Typical uses are to scrape concrete off forms or remove glue from wooden floors.

Code	Description
GG023	36"(914mm) Floor Scraper
GG024	48"(1220mm) Floor Scraper

Replacement blades are available. see website for details.



35° in either direction. The adjustable

squeegee features a threaded Durasoft

SC236 18" (457mm) Adjustable Squeegee





Floor/Form Scrapers Wooden Handle

These scrapers have flexible but robust steel blades and are used to remove heavy debris. Comes with a solid wooden handle.

Code	Description
CC214	14″(350mm) Floor Scraper
CC218	18"(450mm) Floor Scraper
CC222	22"(560mm) Floor Scraper

Replacement blades are available. see website for details.



EZ-Kneeler Kneeboard Stock Code: WL069





Provides the knees comfortable support and protect - so no more sore knees! A 1-1/2'' thick foam cushion provides knees with a comfortable support and protection. The 12-1/4"x13-1/2" pad is securely fastened to a durable 14"x24" tray. The lightweight polypropylene tray features hand holds for easy transport. The tray is washable and chemical resistant.

28" x 8" Lightweight Stainless **Steel Knee Boards**

Lightweight knee boards are made of #18 gauge stainless steel. The 28" x 8" contoured sliders prevent digging into the concrete. These durable sliders are easy to use to protect your concrete while finishing. The lightweight polyurethane knee pads are removable/replaceable.



Stock Code: CC162



28" x 8" 28" x 8" Plastic **Knee Boards** Stock Code: CC153

Foam Rubber Non-Skid Knee Pads Stock Code: WL136



Professional foam rubber shell non-skid knee pads. Contoured cap provides extra support and comfort for heavy use. Velcro® closures are easy to use and adjust.

Sold as a pair.



All Leather Professional Knee Pads Stock Code: WL087

Tough leather makes for long wear. The hard, but pliable knee pads are comfortable on the knees. Lined with 1/2in. thick felt and shaped to fit your knee. Rivet construction holds soft felt in place. One adjustable strap holds pad securely in place while you work.

Sold as a pair.



Foam Rubber Knee Pads Stock Code: WL135

Professional foam rubber hard shell knee pads. Contoured cap provides extra support and comfort for heavy use. Velcro® closures are easy to use and adjust.

Sold as a pair.



INISHING TOOL







TCG500

The TCG500 is the workhorse of choice for contractors looking for a reliable, productive floor grinder.

Dual counter rotating grinding heads ensure balanced operation while the flexible disc coupling ensures maximum contact and usage of the diamond while working over rough surfaces.

The additional weight system and flexible tooling allow fine adjustment of performance and make the TCG500 a versatile package for a wide range of applications.

APPLICATIONS

- Suitable for medium to large jobs
- Levelling and smoothing of concrete
- Removal of coatings and adhesives ٠
- Preparation for new coatings •
- Repairing rain damaged concrete ٠
- Polishing of concrete and other materials ٠

FEATURES

- 500mm grinding width •
- Dual dust ports for virtually dust-free working
- Available with Trelawny Quick Release tooling (QR) for a wide range of applications •
- Additional weights for increased production •
- Trelawny Vibro-Lo™ vibration reduction for operator comfort and safety •
- Available as electric or petrol

Trelawny Diamond Discs

20 Segment Soft **Bond Grinding Disc** **20 Segment Medium** Bond Grinding Disc

350.5620RA



350.5620B





20 Segment Hard







RELAWNY

Heavy Duty Triple Head Scabbler

The SH3 Triple head scabblers are the ideal tools for roughening and preparing concrete in larger areas such as walls and columns. 3 Replaceable tough carbide tipped piston for fast production and long service life. Ergonomic back handle for easy operation or optional Vibro-Lo[™] model with a low vibration side handle.

Stock Code: SH3



Low Vibration Pneumatic Pole Scabbler

The LRS55 is a powerful long reach scabbler for vertically preparing hard to reach areas. At 1.4 metres in length it allows scabbling below the reinforcement bar. The powerful blow quickly removes concrete without damaging the underlying substrate.

Stock Code: LRS55







Low Vibration Heavy Duty Scabbler -Single Head

The SH1 single head scabbler is the ideal tool for roughing and preparing concrete in small areas such as concrete joints. This tool is used with compressed air hoses and works best with a maximum of 10M length hose.

Stock Code: SH1





Barikell Asphalt 20 Concrete Cutting Machine

Speedcrete introduce The Barikell Asphalt 20 concrete and asphalt floor cutter. If you require the cutting of concrete slabs and portions of concrete floors this cutter is going to get the job done for you. This floor cutter is used to create deep cuts in concrete and asphalt floors and can be used to cut chunks of concrete into small pieces for safe and efficient removal.

- Automatic progress and reverse
- Steel water tank: 90 litres
- Maximum cutting depth: 160 mm
- Cutting depth adjustment with control lever

Engine: Vanguard 31 gross hp 23.1 gross kW at 3600 rpm -896cc

GRINDING/POLISHING





A planetry tooling system to convert power trowels with blades to a concrete grinder trowel.

The Grind N Shine Abrasive Tool Holder is designed to house metalbond Diamond Grinding tools, this guick release disc can then be slotted and fixed into place on the base plate section to turn your ride-on or pedestrian power into a grinder trowel.

Grind N Shine Abrasive Tool Holder

The Abrasive Tool Holder is designed to accomodate three grinding pads which can be securely screwed to the disc for the robust leveling of concrete surfaces.



Stock Code: GNSM240



This Abrasive Tool holder acts as the base plate which gets bolted onto the bottom of a ride-on or Pedestrian Power Trowel and the inter-locking steel plate which houses the Diamond Metalbond discs. Most grinding apperatice requires 4 sets of tooling for each of the trowel arms. Available in two sizes for Pedestrian 24" or Ride-on Power Trowels



Stock Code: GNS4404



Grinding System



This planetry tooling system can be used on Pedestrian and Ride-on Power Trowels.



GRINDING / POLISHING





A tooling system to convert Pedestrian or ride-on power trowels into a polishing trowel.

Grind N Shine hybrid tooling system gives you the opportunity to get multiple finishing results from one piece of machinery. The polishing tooling below is all you need.

Grind N Shine Pad Holder

The Grind N Shine pad holder is available for Pedestrian and ride-on power trowels. This base plate is designed to fit onto the Spider arms which usually trowel blades are attached. The cirular plate creates a planetary system when 4 of these pad holders are in place.





Stock Code: GNS4404



Let Speedcrete know if you require the tooling for pedestrian 24" trowels. Example pictured to the right.

Grind N Shine Velcro Pad Shield



Stock Code: GNS240

This pad protects your tooling in the case of the Resin polishing pads wearing down, the Velcro Shield is made from polycarbonite and has three circular areas which fit three polishing Diamond Resin Pads.







Power Trowel pictured above.

Resin Bonded diamond abrasive discs 3"

Grind N Shine Resin bonded diamond abrasive discs are used for polishing concrete floors for wet or dry use. These discs have been developed for use with planetary trowels.

Yellow Velcro

White Velcro

GNS75-03

GNS75-04



GRIND

Grit 400

Grit 800

Once you have the tooling the next thing is to choose the correct grit level required from our range of Grind N Shine Resin bonded diamond abrasives. 9 per pack.

> Grit Level GNS75-01 Green Velcro Grit 60 GNS75-02 Black Velcro Grit 120

SPECIALIST FLOATS

Triple Disc Grinders

Grinding Width 780mm

This remote controlled floor grinder designed for finishing large horizonal surfaces.



This machine is equipped as standard with a speed control system and is operated using a remote control that gives you all relevant information such as amps, volt, rpm, rtc. In addition, it is battery driven, allowing the operator to go in and out of sites, thanks to the 24V battery drive system and two independant drive motors.

This machine can also be used for polishing and maintaining floors thank to it's adjustable grinding pressure.





Grinding Width 444mm

This triple disc grinder designed for various sizes of horizontal surface preparation applications.



Due to its wide wheelbase, it is easy to manoeuvre with minimum vibrations and a low noise level. Thanks to the adjustable steering handle it is easy to control the machine. In addition, this grinder can be folded or dismantled into three parts for easy transportation up flights of stairs or onto small vehicles. This is an ideal machine for companies dealing with removal of coating, concrete grinding, floor renovation or polishing applications.



Ideal for a wide range of outdoor applications. These compact machines are designed to facilitate an ergonomic work position and is easy and convenient to use and transport. There is no need for power cables which ensures even better mobility on the job site and more time to work with the project at hand.

Single Disc Grinders

Grinding Width 250mm

This single disc concrete grinder designed for heavy duty surface preparation applications. Very easy and comfortable to use with low vibrations. Thanks to its two front handles, it is possible to lift the machine up a flight of stairs. With an asymmetric dust exhaust and built-in deflector for improved/ optimised dust extraction. In addition, it is equipped with a special drive system for optimum load distribution.

Grinding disc speed max 1920 rpm

Petrol Grinders

Husqvarna introduces a range of petrol driven single disc floor grinders.

> Available in grinding widths of 400mm & 250mm.







W70 Wet & Slurry Vacuum

W 70 is a durable and efficient industrial wet and slurry vacuum designed for tough jobs. It's also known for its long, trouble-free service life. This is achieved by using high quality stainless steel components and a special combination of filter and float that protects the motor. Where most wet vacs can only handle water, W 70 can deal with liquids such as concrete slurry, oils and machining coolants.



DE110i Battery Dust Collector

This versatile H-class dust extractor is powered by Husqvarna's own 36 V BLi batteries and is an excellent match for handheld battery equipment. It features a user-friendly HMI and an e-flow function that automatically adjusts the air flow while securing high runtime from the batteries. Its high water protection enables fast and efficient decontamination. It also features embedded connectivity allowing you to swiftly monitor location, service and filter status along with other valuable usage data.

Phases: 1 Air Flow: 200 m³/h Rated input power: 1.2 hp Weight: 26 kg



A 1000



A 2000



Δ

Δ

Dust collectors Husqvarna A 1000 and A 2000

The A 1000 & A 2000 represent two of the most advanced portable air cleaners available on the market. These units are tested and certified for use as both an air cleaner and a negative air machine. Thanks to a reliable filter system and a design that is perfectly matched to operation with HEPA class H13 filters, that are tested and certified at an efficiency rate of 99.99% at 0.3 microns.

A 1000 Specifications		A 2000 Spec
hases	1~	Phases
Air requirement 10	000 m³/h	Air requireme
Rated input power	0.4 kW	Rated input p
Veight	20 kg	Weight

2000 Specifications

nases 1~ ir requirement 2000 m³/h ated input power 0.6 kW Yeight 23 kg



DE110i Battery Dust Collector

This versatile HEPA dust extractor is compact and easy to transport, yet powerful. It is designed for use with larger hand-held power-tools, floor and hand grinders, shotblasters, scarifiers and more.

Its performance and sturdiness make the DE 120 ideal for demanding, heavy-duty applications. It features a user-friendly HMI and an e-flow function that automatically adjusts air flow while securing high runtime from the batteries. Its high water protection enables fast and efficient decontamination. It also features embedded connectivity allowing you to swiftly monitor location, service and filter status along with other valuable usage data.

Phases: 1 Air Flow: 265 cfm Rated input power: 3 hp Weight: 38.5 kg





Husqvarna

CUTTING & GRINDING

Electric Power Cutter

Petrol Power Cutters Husqvarna K770

The Husqvarna K770 14" is a powerful all-around power cutter with features that make it one of the best power cutters on the market. Equipped with a semi-automatic SmartTension[™] system allows for optimal power transmission, minimum wear and maximum belt life. The lightweight, outstanding power-to-weight ratio, reliable start and exceptionally low vibrations mean less strain and maximised productivity. Suitable for road work and easy to cut in a straight or curved track or close to the sidewalk when used with a K770 trolley.

Blade diameter, max | Cutting depth, max 350mm 125mm

Petrol Power Cutters Trolley Husqvarna K770 Cutting Trolley

Husqvarna cutting trolleys are designed specifically for Husqvarna's handheld petrol power cutters. The quick connections make it easy to install the cutter on the trolley, and the cutting depth is easy to adjust. With a cutting trolley it's easy to cut in straight or curved lines, and close to walls and curbstones. The design is compact and they're easy to fold up and transport.

Husqvarna



Our Cut-n-Break method is the natural choice when you need to cut deep but want a machine with low tool and maintenance costs. The K 4000 Cut-n-Break enables you to cut as deep as 400 mm from one side. Suitable for flush cutting close to walls and floors as well as for smaller jobs like window openings where you want to avoid overcutting at the corners.

Blade diameter, max | Cutting depth, max 230mm

400mm

Voltage: 100-120 V

Saw Blades

As an official dealer of Husqvarna we can supply numerous blades for hand cut-off saws and floor/road saws.



Saw Blades

Part of our Gold series, Elite-Cut S85 is specially designed to provide optimal cutting performance in asphalt, green concrete and other very abrasive applications. The blade features a protection segment preventing undercutting.

Fits Model: **K770**, **K970**, **K1270**, **K4000**



CONCRETE DISSOLVER





HOW DOES SPEEDY-CLEAN CONCRETE DISSOLVER WORK?

SpeedyClean Concrete Dissolver works by attacking and dissolving the "glue," or Portland, in concrete. It deconstructs the bond between the portland and the other ingredients such as sand or gravel. It turns the material into a soft mush which does not require hazardous waste disposal. The amount of time required for this process is strictly proportional to the thickness of the concrete being dissolved.



Speedy-Clean a biodegradable non fuming concrete dissolver

CONCRETE DISSOLVER

Biodegradable ~ Eco Friendly

New Powerful Formula

NO HYDROCLORIC SULFURIC MURIACTIC ACID

Non fuming Non hazardous to equipment Powerful, fast & efficient

MANUFACTURER CANNOT GIVE WARRANTY SINCE WE HAVE NO CONTROL OVER USE OF MATERIAL.

Speedy-Clean

Clean & Protect your capital investments with this super effective concrete dissolver, the most powerful & effective concrete dissolver available.

Code	Description
LCLE808-05	75ml
LCLE808-50	5ltr
LCLE808-02	20ltr
LCLE808-55	205ltr
LCLE808-1000	1000ltr

Speedy-Clean works best when used with a foamer. Visit page... to see our range of foamers.



CONCRETE WASHOUT

Speedcrete introduce The Concrete washout, a new neat environmentally friendly solution for containment of concrete washout on the job site.



THE CONCRETE WASHOUT

This product is designed to easily dispose of liquid solutions which will harden such as: concrete, plaster and cement.


The Speedcrete concrete washout is available in two sizes (1800mm, 1000mm) and is supplied flat packed for ease of storage in transit. This lightweight product can be assembled very quickly with ease.



If you are working in an environment where continuous cleanliness is a requirement this washout vessel is an ideal solution to containing material and disposing of such material in an efficient way.







Code	Dimensions
945-123406	W1800 x L 1800 H 300mm
945-123404	W1000 x L 1000 H 300mm



Concrete Slurry Solidifier



Speedcrete Slurry Solidifier rapidly absorbs concrete washout water for safe and quick disposal.

Code	Weight
2470-035	1.9kg
2470-036	25kg

Best used in conjunction with our concrete washout container the slurry solidifier rapidly absorbs waste water at a ratio of 1 litre per approx 5-6 square Litres. It is inert and free from any toxicity and provides an excellent way to quickly absorb the waste water for easily disposal at landfill.

Concrete Mixer Chute Scraper

Speedcretes Chute Scrapers are used to clean out ready mix truck discharge from the chutes at the end of the drivers load.



Stock Code: CC987H

Long Arm Wash Down Brushes

The product features a 20-inch handle that keeps your hands far away from the material being applied. It also has two-inch fibres giving a balanced spring to the bristles for a quick and effective performance.





EPOXY FLOORS

EPOXY FLOORING TOOLS



Epoxy Floats

materials.

The Marshalltown Epoxy Floats are used when working with epoxy, laying tiles or other situations. These poxy floats are available in two sizes and have a DuraSoft® handle for extra comfort in use. Made in the USA with global



Code	Description	Size
EF87D	Epoxy Float Durasoft	254 x 102mm
EF88D	Epoxy Float Durasoft	324 x 76mm


EE88D Has an offset handle and a narrow plate for working in tight places.

Epoxy Spiked Shoes

Pro finish Spiked Shoes are ideal for working on epoxy floor environments. Specially designed so there is no need to take off your shoes, simply slot your boot in and away you go.



Model No.	Shoe Type
ESHOE-M	Spiked Epoxy shoe medium
ESHOE-L	Spiked Epoxy shoe large
ESHOE-XL	Spiked Epoxy shoe extra-large



products.

C) 24" Gauge Rake/Leveler

C

D

Epoxy Spike Roller



Roll out air bubbles in epoxy coatings and self leveling material with Spiked nylon rollers. Thes rollers come with the frame which is compatible with a GG232 60" steel threaded handle.

Code	Description	Size
GG609	Epoxy Spike Roller	9 inch
GG618	Epoxy Spike Roller	18 inch



E

D) Hi-Craft Gunite Shoes

E) 10 Self Leveling Shoes

F) 24" Wood Frame Stainless Steel Smoother and Gauae Rake

> G) 5' 3-piece Aluminium handles.

> > H) Oval Mixer (zinc Plated Steel)

14" Squeegee Trowel with **ProForm® Soft Grip Handle**

F



Use this squeegee trowel to smooth a variety of coatings in concrete restoration, decorative concrete, drywall and general construction. The 14" flexible blade is easy to control and provides the desired coverage for materials.

Stock Code: GG243



FOAMERS

Manual Foamers



Manual Compression foamers that will work anywhere are ideal for the application of cleaning chemicals onto equipment to prevent run-off.

Foaming through compression creates a 'Snow Foam' that clings to the surface which helps the chemicals have time to work

1.5 LITRES8 LITRESStock Code:
3132FO3270FO

AMER

Mesto Backpack Sprayer

The backpack sprayer is the perfect helper for professional users. It offers plenty of comfort, such as an ergonomically shaped pump lever whose length and width can be adjusted and a special flat jet nozzle 80-04 with filter.

Filling Content: 18.0 Ltr (4.76 gal) Max. Operating Pressure: 6 bar (88 psi) Seals: FPM/FKM Scope of Application: pH 1 - 9* Nozzle: 80 - 04 E, Brass, Flat jet nozzle Spray Wand: 360° rotatable, 50 cm, Brass, curved Hose: 150 cm, reinforced with fabric insert, D10 Manometer: Pressure gauge with indicator Pump: Plastic piston pump





Our foam pro series of compressed air powered foamers offer a convienient solution to the application of a variety of chemicals.

Many cleaning solutions are hard to apply in liquid form and need a method to bind to the surface to allow the solution to act. The Foam Pro offers two machines in one as it utilizes a two head system. One for spray application and one for foam application. This allows for the application of a great variety of chemicals.

Manufactured from stainless steel these foamers are easy to transpot via the trolley feature which allows large volumes of liquid to be easily moved around the work area.

Model No.	Model Capacity
Foam Pro 25	25 Litres
Foam Pro 50	50 Litres
Foam Pro 100	100 Litres





Stock Code: 3558P





MESTO sprayers are produced with high-quality materials, the best possible workmanship at one location in combination with a continuous optimization of all processes guarantee the excellent performance and the long service life of Mesto sprayers.

Mesto Profi Plus 10ltr Sprayer 10Ltr Viton® Seals, 3 Bar

Mesto Profi Plus 10ltr Polyethylene Sprayer. Featuring Brass wand an FPMTM Viton seals for spraying aggressive curing compounds such Pro-SealTM, Acids, Brake Cleaners.

Stock Code: 3270P



Mesto Industrial Cart Sprayer Viton® Seals

Mesto industrial cart sprayers include a compressed air fitting allowing you to couple an air line for continuous spraying without manually charging the sprayer. Great for high volume applications. This Mesto sprayer has FPM VitonTM seals that enable the spraying of harsh chemical's such as concrete curing compounds.

6 ltr Stock Code: 3595P **10 ltr Stock Code:** 3615P



Mesto Innox Backpack Harness

This Backpack Harnes is ideal for continuous use thanks to optimum load distribution between shoulders, back and hip. Please note that this harnes does not come with the sprayer or foamer, these need to be purchased seperately.

Stock Code: 3961N



X DIN A

Mesto Primer Sprayer 5ltr Viton® Seals

The Mesto Primer sprayer features a 5 Litre capacity that will fulfil most small spraying requirements. It is quick and easy to fill and contains an integral dirt filter.

The Primer sprayer is suitable for spraying a wide range of industrial chemicals and is particularly suitable for acidic compounds such as brake cleaner, mould oils, curing compounds.The ability to attached an air valve to compress the sprayer is offered as an optional extra.

Stock Code: 3275XP

PRIME

Mesto Universal Hand Sprayer

This robust plastic hand sprayer is the perfect helper for construction, concrete, sanitation, pest control, agriculture, and gardening. The durable design, specialized seals, and pump protection cap, make it ideal for detailed work using harsh chemicals.

Capacity: 1.5 L (0.4 gallon)

Stock Code: 3132PG





Mesto Industrial Cart Sprayer 10Ltr Viton® Seals

Mesto industrial cart sprayers include a compressed air fitting allowing you to couple an air line for continuous spraying without manually charging the sprayer. Great for high volume applications. This Mesto sprayer has FPM VitonTM seals that enable the spraying of harsh chemical's such as concrete curing compounds.

Stock Code: 3615FT



BITUMEN SPRAYER & CONCRETE CURING SPRAYERS



Speedspray Bitumen Sprayer for application of cold bitumen emulsion sealer's onto Asphalt surfaces.

Features

Honda petrol engine Rotary pump with flexible impeller "V" rope drive with lever operated clutch Straining chamber Solvent tank 4.57m length of 19mm bore armoured rubber delivery hose & couplings 2m length of 32mm bore reinforced rubber suction hose Steel suction tube

Stock Code: SPRAY/PU/L



The Speedspray Pro Concrete Curing Sprayer is a Honda powered motorised sprayer. The sturdy 3-wheeled trolley frame will house a 25 litre drum and is easily manuovered around the job site for efficient use.

The Speedspray petrol gas sprayer features an all new telescopic brass lance design, which allows the lance lance to be extended from 1.2mtrs to 2.0mtrs giving the operator improved reach onto the slab.

Stock Code: SS-25LTR

Speedspray Pro Concrete Curing Sprayer 200ltr Capacity



The Speedway Pro Powered Sprayer is a wheeled unit designed to carry large 200 litre drums of curing agent. A pump powered Honda engine allows an operative to spray curing agent across the slab in an even manner with ease.



The control from telescopic featherlite lance design which features a shut off valve directly on the lance for increased operator control; no more returning to the cart to shut the flow off. The telescopic lance can be extended from 1.3mtrs to 2.5mtrs to reach far out onto the slab. The pressure generated by the pump during spraying literally 'floats' the lance in the air giving single hand feather-lite response making spraying extremely easy.

Stock Code: SS-200LTR



Duo-Top Topping Spreader

This affordable topping spreader is great for minimising material waste by ensuring an even and accurate distribution of granolithic toppings is applied. The spreader lies close to the ground, which means that the topping can be applied at a low-level, helping to prevent the build up of dust in the working environment.

With two independent wheels this spreader has a high level of mobility allowing for the operator to work quickly and efficiently without sacrificing accuracy making it easy to complete a professional standard quickly.



Stock Code: SPREADER1

SPRAYERS





evolution^{*}

The Evo-System Engine

The Evo-System engine powers 3 outputs: The Evolution generator, the Evolution pressure washer and the Evolution water pump. **See Below.**

Stock Code: 014-0002



Evo-System 175 Bar Pressure Washer

The Jet-Wash features premium quality brass pump, high-pressure performance (175 bar) and built-in detergent system for maximum cleaning capability.

Includes professional lance with adjustable nozzle, which varies the spray for the required use.

Stock Code: 014-0003



Evo-System 2800w (110Vv & 230v) Generator

Switchable voltages with a simple flick of the switch you can choose between 110v and 230v. Also features Automatic Voltage Regulation, ensuring the voltage level is always consistent & accurate.

Stock Code: 014-0004



Evo-System 1000L/Min Water Pump

The Water Pump Features 3" (75mm) diameter inlet and outlet ports and pumps up to 1000 litres of water per minute. The perfect solution when you need to move water quickly and efficiently. Hose's not available form Evolution.

Stock Code: 014-0005



The Evo-System -Complete Kit



This complete kit offers the ultimate jet-wash and pump combination for construction level usage. This kit includes: Evolution Evo-System 6.5HP (4-STROKE) Engine (EVO200) which powers a range of interchangeable outputs providing incredible versatility, flexibility and saving you money.

This kit includes three of these interchangables:

Evolution Evo-System 2800W Generator Output Evolution Evo-System 175 Bar Pressure Washer Output Evolution Evo-System 1000L/Min Dirty Water Pump Output

Stock Code: 4010-012



The Evo-System Jetwash Kit

This combination kit includes The Evo-system Engine and the Evo- system 175 Bar Pressure Washer. This is a popular combination for construction companies operating on sites that offer no power source.

Built-In Detergent System 6m Hose Length Max. Flow Rate: 8L/min

Stock Code: 4010-010



CHEMICALS / CLEANING



Speed Strike Mould Oil

Speed Strike is a premium concrete mould oil which is used to prevent concrete adhering to formwork surfaces and ensures a clean 'strike' off the formwork subsequent to the concrete pour. Available in three volume quantities: 5 litre, 25 litre and 205 litre.

MO05 Premium Concrete Mould Oil 5 litres

MO25 Premium Concrete Mould Oil 25 litres MO20525 Premium Concrete Mould Oil 205 litres

Speedy Shield Mould Oil

Speedy Shield is formulated to prevent concrete and other cementitious materials from adhering to concrete mixers, equipment and tools. The shield dries to form a 'high gloss' invisible barrier which stops concrete adhering to the surface of your machines. Speedy Shield is biodegradable, non-flammable, non-corrosive, and doesnt harm paint.

Code	Description
LCLE818-32	Speedy Shield 250ml
LCLE818-50	Speedy Shield 5 ltrs
LCLE818-02	Speedy Shield 25 litres
LCLE818-55	Speedy Shield 205 litres



Ecocure Sealer 25ltr

Ecocure Sealer is a water based, low odour, membrane forming liquid for curing, sealing and dust-proofing concrete. Ecocure Sealer is suitable for use over new and old concrete and performs well on both interior and exterior concrete. After application and drying, the film is clear with a slight glossy appearance. Heavy applications and/or prolonged exposure to moisture will cause the cured film to have a milky appearance. Drying will allow the sealer to become clear again.

Stock Code: SPRO/25W

			4
	6	-	È,
1	-	1 - 20hr	Ξ
	1000	in the second	
	0000		-

TYCUDE

uniform and consistent finish. Recommended application method - Use a stainless steel sprayer which has viton seals, the liquid can also be applied via a firm brush. Recommended minimum coverage of 5mtr².

By forming a lubricating barrier this product decreases

friction between the texturing tool and the concrete

preventing surface pick-up, this in turn maintains a

Code	Description	
XYLOL	Zyglide 5 litres	
XYLOL25	Zyglide 25 litres	

Zyglide Liquid Release



Metalshield provides outstanding protection to metal surfaces when equipment is anticipated to be stored or shipped for a long period of time. This product also forms a layer of protection which makes cleaning hardened concrete from machinery a much faster process.

Code	Description
OIL5	Metalshield 5 litres
OIL20	Metalshield 20 litres

Ecocure WW 25ltr

Ecocure Water Based Concrete Curing Compound locks in moisture into freshly cast concrete surfaces to prevent premature drying out, this reduces the risks of surface cracking and dusting. This curing compund is srayed onto the surface and is designed to improve the durability of the concrete surface.

Stock Code: CUR/25



Ideal for ensuring decorative rollers don't pick up concrete whenin use.



FLOOR SEALERS



Grind N Shine Red Floor Pad

When concrete floors have been polished certain agents are used to protect or harden the surface for longevity.

The Grind N Shine technique of using a ride-on or pedestrian trowel uses circular velcro discs which allow the user to quickly change from either: grinding discs, diamond resin polishing discs or in this case to attach a floor pad to evenly apply liquid agents. The Red floor Pad, firmly attaches to the velcro and is typically purchased in quantities of four to cover each velcro disc.



Stock Code: GNSRED





Stock Code: GNSLITH



Concentrated Water Repellent Additive

Stock Code: GNSADD25



SIKAFLOOR PROSEAL W

Sikafloor®-ProSeal W is a one part water dispersed acrylic emulsion to cure, harden and seal fresh or hardened concrete.



Sikafloor-ProSeal W is a low odour one part water dispersed acrylic emulsion to cure, harden and seal fresh or hardened concrete. Sikafloor Proseal W is typically used on industrial projects where a clean working environment which is easy to maintain is desired. Suitable for interior and exterior application.

Stock Code: PRO/25W



SIKA PROSEAL PRO

Sikafloor Proseal Pro is is a clear acrylic resin polymer solution, which impregnates concrete surfaces to cure, harden and seal fresh or hardened concrete. Sikafloor Proseal Pro is typically used on industrial projects where a clean working environment which is easy to maintain if desired.

Stock Code: PRO/25



SIKA WATERPROOFER

A liquid waterproofing additive for mortar and concrete. For use in conjunction with Sika-1 pre-bagged mortars. With a proven track record of over 100 years this product offers excellent resistence to backwater pressure.

Stock Code: SK1WAT5



JOINT SEALANT



SIKAFLEX-406 KC BLACK

Sikaflex®-406 KC is especially designed for elastic joint sealing between rails, adjacent surfaces.

Sikaflex®-406 KC is a 1-part self-levelling booster accelerated elastic floor joint sealant with high mechanical and chemical resistance. Rapid and homogeneous curing throughout the entire sealant is achieved by the addition of the Sikaflex®-406 KC Booster.

Stock Code: SK406KC

SIKAFLEX 406-KC BOOSTER



Sikaflex®-406 KC Booster can be added to Sikaflex®-406 KC to speeds up the homogeneous curing throughout the entire sealant. This booster can be used when the sealant requires rapid completion.

Stock Code: SK406BS



A Sikaflex® Booster is mixed in which is for jobs that require rapid completion.



This elastic sealant is carefully poured into the joint.

SIKAFLEX PRO-3 POLYURETHANE SEALANT



Sikaflex Pro-3 is a one part, moisture curing, elastic polyurethane sealant which comes in 600ml Foil packs. Colour- Black. This polyurethane sealant seals many a variety of joint configurations in floors and civil engineering structures. Elasticity is maintained over a wide temperature range and high mechanical and chemical resistance provides good durability. Designed for both internal and external applications.

Stock Code: FPSKPRO3BK6

APPLICATION GUN FOIL PACK

The Foil Pack applicator gun is designed for use with foil packs, the enclosed aluminium barrel can also be used for standard cartridges of 600ml.

Stock Code: SGCOMB16

PAVING JOINTING COM-POUND SIKA FASTFIX



Sika FastFix can be used for a range of applications including footpaths, stone setts, cobbles and Indian sandstone paving slabs. No mixing required, easy to apply in all weather conditions.

Stock Code: SKFFIXFLT16

SEALANT GUN SUPERFLOW

Engineered to be what we believe is the best gun ever. With a rotating barrel, smooth action trigger soft grip handle and a non-drip device all wrapped up in a robust, sturdy gun that will handle the toughest conditions.

Size: C3/310ML Stock Code: SGSUPERF

SILICONE SEALANT 825 ANTHRACITE

Everbuild Tecnic Silicone 825 is a low modulus, neutral curing silicone sealant based on a filled alkoxy curing system, specially formulated to provide extra tool down time on longer joints. Conforms to ISO 11600 class F25LM and G25LM when tested to ISO 11600.

Stock Code: 825ANTH





Standard white cartridge nozzles, handy replacements packed in 6's. Fits all 290mm & 310mm cartridges.

Stock Code: NOZSTD

ΤΑΡΕ





AMERICAN DUCT TAPE (GREY)

American Duct Tape is not only thick, strong and 100% waterproof; it also has the most amazing adhesive quality. Grey is the most popular colour, orange is also available.

Stock Code: USDUCTSV25



GAGGA TAPE MAMMOTH

Gaffa Tape is a utility grade cloth tape for use in repairs in construction, industry. This hardy tape is ideal for lining areas in preparation to add sealants to concrete slabs.

Stock Code: 2VGAFFBK45

PRO BLUE TAPE MAMMOTH



Professional Long Stay Masking Tape that can be left on for up to 14 days without leaving a residue or damage to the surface. Pro Blue prevents seepage when using highly solvented or thinner coatings such as Woodstains and many metal paints. High temperature resistance.

Stock Code: 2PRO50