



ASX90  
GRADE

PRODUCT DATA SHEET

ASPHALT DIAMOND BLADE

## PRODUCT DATA SHEET

### ASX90 ASPHALT


The ASX – Asphalt diamond blade range offers fast stock removal and lifetime when used for cutting the most abrasive of applications such as asphalt, green concrete and cement screed.

#### KEY FEATURES

- 10mm Segment Height
- High Diamond Concentration
- Undercutting Protection
- Laser Welded Segments




Mexco Diamond Blade product packaging

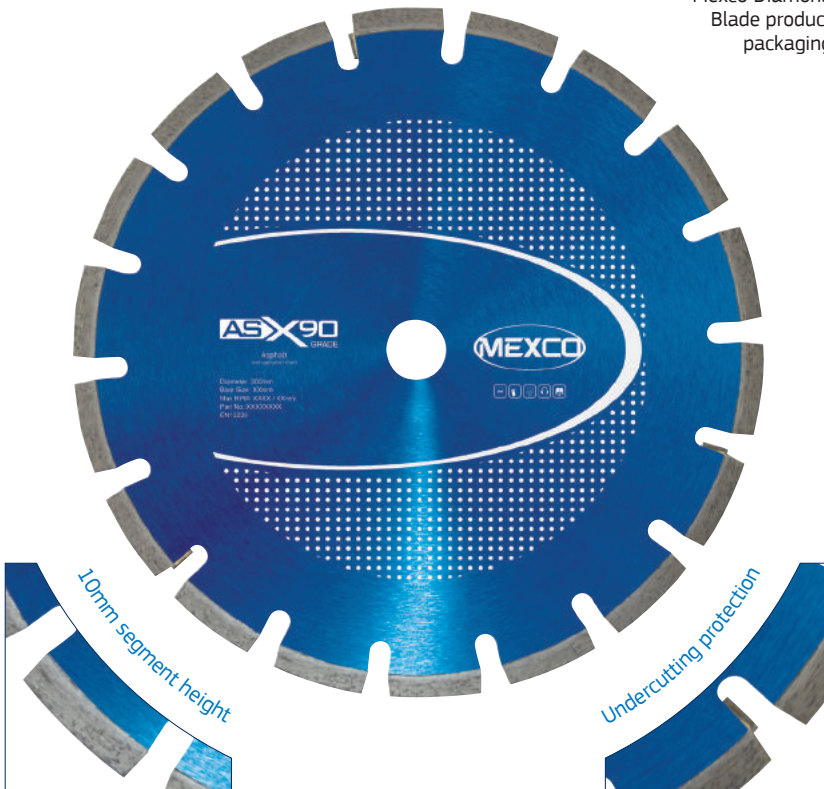

### DIAMETERS AVAILABLE:

Code	Diameter		Segment Width (mm)	Bore Size / s (mm)
	(mm)	(in)		
ASX9030020	300	12	3.2	20.00
ASX9035025	350	14	3.2	25.40
ASX9045025	450	18	3.6	25.40
ASX90500LHP	500	20	4.0	25.40
ASX90600LHP	600	24	4.5	25.40

### SUITABLE FOR USE ON:




### APPLICATION:

- Concrete Roof Tiles
- Concrete with Med Sharp Sand
- Coarse Sandstone
- Breeze Block
- Shallow Concrete Screed
- Asphalt Over Concrete
- Concrete Block Under 15kn
- Green Concrete
- Lignacite Blocks
- Asphalt



Breeze Block



Concrete Roof Tile



Green Concrete



Asphalt

### PRODUCT OVERVIEW:

**Grade:** X90

**Segment Height:** 10mm

**Segment Attachment:** Laser Welded

**Dry/Wet:** Wet or Dry Use

**Recommended for:** Disc Cutter, Bench Saw & Floor Saw

**Segment Type:** Segmented

**Gullet Type:** U-Slot

**Undercutting Protection:** Yes

X90  
GRADE

LOW WEAR RATE

The X90 range of products allow a broad range of cutting applications and will provide fast cutting characteristics combined with low wear rates and an excellent lifetime.



CONFORMS TO EN13236

www.mexco.co.uk | Tel: 0845 602 4274 | Email: sales@mexco.co.uk

Please note: Before using any cutting, grinding or drilling tool you should always consult your machine manufacturers hand book to establish the consumable tools suitability for the machine being used. Always wear the correct safety clothing and accessories before you commence use of the equipment.